


The mercatormap package

Manual for version 1.00 (2020/04/20)

Thomas F. Sturm

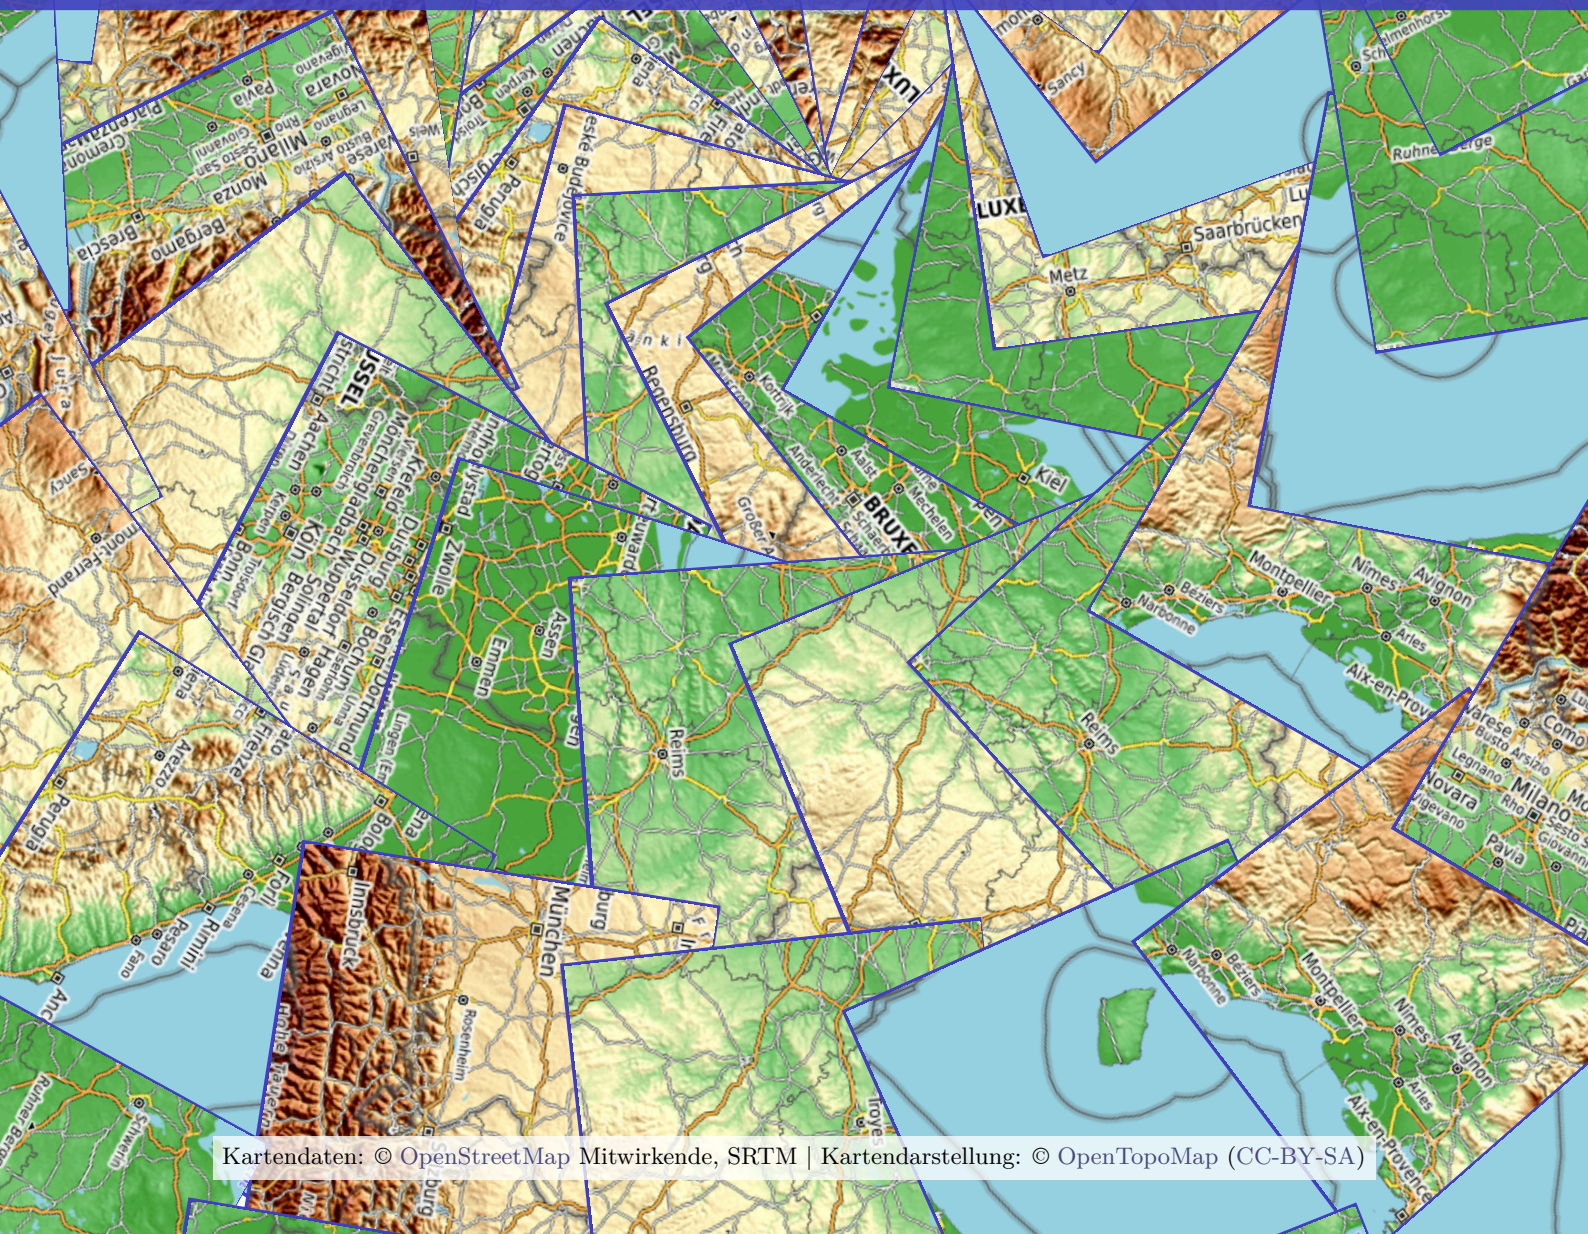

Cover code

```

\begin{tcolorbox}[spread,blankest]
\mermapset{flex tile size=40mm}
\begin{tikzpicture}
\mrcmap[type=areafit,west=5,east=15,south=46,north=54,
  source = opentopomap,
  flex area scale=4 000 000,
  tex width=\tcbtextwidth,
  tex height=\tcbtextheight,
  ]{title}
\mrcclipmap
\ExplSyntaxOn
\sys_gset_rand_seed:n {15}
\int_set:Nn \l_tmpa_int {1}
\int_until_do:nNnn \l_tmpa_int > {77}
{
  \fp_set:Nn \l_tmpa_fp {\tcbtextwidth/2
    + \l_tmpa_int*2.5mm*cosd(18*\l_tmpa_int)}
  \fp_set:Nn \l_tmpb_fp {\tcbtextheight/2
    + \l_tmpa_int*2.5mm*sind(18*\l_tmpa_int)}
  \node[inner~sep=0pt,draw=blue!50!gray,line~width=1mm,
    at={(\fp_to_dim:N\l_tmpa_fp,\fp_to_dim:N\l_tmpb_fp)},
    rotate=\fp_eval:n{18*\l_tmpa_int+10*rand()} ]
    {\includegraphics[width=55mm,height=55mm]
      {tiles/opentopomap_
        \int_use:N \l__mermap_tile_zoom_int _
        \fp_eval:n {
          \randint(\l__mermap_tile_xmin_int,\l__mermap_tile_xmax_int) }_
        \fp_eval:n {
          \randint(\l__mermap_tile_ymin_int,\l__mermap_tile_ymax_int) }.png
      }
    };
  \int_incr:N\l_tmpa_int
}
\ExplSyntaxOff
\node[font=\small\footnotesize,fill=white,opacity=0.75,text opacity=1]
  at (\tcbtextwidth/2,1cm) {\mrcmapattribution};
\node at (\tcbtextwidth/2,\tcbtextheight*0.667)
  {\begin{tcolorbox}[
    center upper, fontupper=\bfseries,boxsep=15mm, boxrule=4mm,
    sharp corners, oversize=5mm,
    colback=white, colframe=blue!50!gray,
    enhanced jigsaw, opacityback=0.8, opacityframe=0.9 ]
    {\Huge The mercatormap package\par}
    \vspace{1cm}
    Manual for version \version\ (\datum)\par
    \vspace{5mm}
    Thomas F.-Sturm
  \end{tcolorbox}};
\end{tikzpicture}
\end{tcolorbox}

```

The mercatormap package

Manual for version 1.00 (2020/04/20)

Thomas F. Sturm¹

<http://www.ctan.org/pkg/mercatormap>

<https://github.com/T-F-S/mercatormap>

Abstract

The `mercatormap` package extends `TikZ` with tools to create map graphics. The provided coordinate system relies on the Web Mercator projection used on the Web by OpenStreetMap and others. The package supports the seamless integration of graphics from public map tile servers by a Python script. Also, common map elements like markers, geodetic networks, bar scales, routes, orthodrome pieces, and more are part of the package.

Contents

1	Introduction	5
1.1	Quick Start	5
1.2	Installation of Python and Packages	6
1.2.1	Python 3	6
1.2.2	Python Packages	6
1.2.3	Document Setup	6
2	Examples	7
2.1	Reference Position	7
2.2	Fitting Area	9
2.3	Fixed Boundaries	10
2.4	Map Without Map Tiles	11
2.5	Alignment of the Reference Position	14
2.6	Flexible Zoom	15
3	Map Definition and Map Coordinates	17
3.1	Option Setting	17
3.2	Manual Map Definition	18
3.3	Further Map Definition Options	18
3.4	Map Coordinate System	20
3.5	Named Positions	22
3.6	Tests for Points to be inside or outside a Map	23
3.7	Formatted Coordinate Output	24
4	Automated Map Definition and Map Tiles	27
4.1	Script Activation	27
4.2	Map Types	28
4.3	Map Supply	29

¹Prof. Dr. Dr. Thomas F. Sturm, Institut für Mathematik und Informatik, Universität der Bundeswehr München, D-85577 Neubiberg, Germany; email: thomas.sturm@unibw.de

4.4	Map Apply	35
4.5	Map Tile Server	36
5	Map Drawing	50
5.1	Principal Drawing	50
5.2	Flexible Tile Size	51
5.3	Geodetic Network	53
5.4	Graphical Debug Overlay	54
6	Scales and Sizes	55
6.1	Map Sizes and Document Sizes	55
6.2	Pretty Size Output	56
6.3	Scale Bars	58
7	Markers	62
7.1	Marker Settings	62
7.2	Marker Types	65
7.3	New Marker Types	71
7.4	New Marker Styles	72
8	Routes	73
8.1	Route Path Definition	73
8.2	Example Python Conversion Scripts for gpx	75
9	Orthodromes and Loxodromes	76
9.1	Orthodrome Drawing	76
9.2	Orthodromic and Loxodromic Distances	78
10	Limitations and Caveats	79
10.1	No Polar Regions	79
10.2	International Dateline (180th Meridian)	80
10.3	Very small Scale Maps	81
10.4	Zoom is not Scale	82
10.5	Distances	83
11	Version History	88
	References	89
	Index	90

1 Introduction

The `mercatormap` package enables map drawing with the Web Mercator projection. This is done as an extension to `TikZ` [2] with is complemented by a map coordinate system and many additional commands and options to add elements like markers, geodetic networks, bar scales, routes, orthodrome pieces, distance calculations, etc. Also, the seamless integration of graphics from public map tile servers is provided through a Python script.

If you are interested in the mathematical background of the Web Mercator projection and the algorithms of this packages, you are invited to read “Thomas F. Sturm. *Some Principles of Web Mercator Maps and their Computation*. Monograph. Neubiberg: Universität der Bundeswehr München, Mar. 5, 2020. 44 pages. DOI: [10.18726/2020_3](https://doi.org/10.18726/2020_3)”.

With very few exceptions, the package is programmed with the `expl3` [3] programming interface for \LaTeX 3 and loads the packages `xparse` [4] and `siunitx` [5].



1.1 Quick Start

The package is accompanied with a Python script. You should read Section 1.2 on page 6 for the Python preparations. The package can be used in three ways:

- Completely without the Python script. This is not recommended, because the usage will be quite restricted.
- With Python script, but without map tile download. There is no usage restriction, but you have to create all content yourself. To prevent map tile download, set

```
\mercatorset{supply/target=none}
```

- With Python script and map tile download. You need permission and access to a map tile server. Section 4.5 on page 36 lists a selection of servers with free access (some require registration of an API key).

After Python is prepared, you may try to compile `mercatormap-example.tex` (found in the documentation directory) which contains a map of Bavaria with map tile download. Section 2 on page 7 exhibits further examples which may serve as tutorials what can be done. After the examples you find the reference manual for the package.

1.2 Installation of Python and Packages

A Python 3 script is part of the `mercatormap` package. The main purpose of this script is to download selected map tiles for the maps of the document. Also, some coordinate system computation is done by this script.

1.2.1 Python 3

Python 3 is a required prerequisite and can be downloaded from

<https://www.python.org/downloads/>

On systems like Linux Python is typically already installed.

To test your installation, type into a command or terminal window:

```
python --version
```

This should give a version number starting with 3. Otherwise, try

```
python3 --version
```

If this is successful, `/mermap/python`^{→P.27} has to be adapted to `python3`

1.2.2 Python Packages

The Python packages `Pillow` (<https://pypi.org/project/Pillow/>) and `requests` (<https://pypi.org/project/requests/>) have to be present. With some luck, they are already installed. With

```
pip3 list
```

and/or

```
pip3 list --user
```

the installed packages are listed. If `Pillow` and `requests` are not among these package, they have to be added by

```
pip3 install --user Pillow
pip3 install --user requests
```

or

```
pip3 install Pillow
pip3 install requests
```

The second choice needs administrative rights and may give conflicts with package managers. Pythonians know further installation methods.

1.2.3 Document Setup

For your map document you need the following:

- Add `\mrcactivatescript`^{→P.27} to the document preamble. Without this command, the script is not active.
- Compile the map document with the `--shell-escape` compiler option. This allows to execute external programs like the Python script.
Be aware that `--shell-escape` should only be used with trusted documents.
Note that external programs can do anything!

2 Examples

The following map examples may be used as tutorials and starting point for own applications. Also see `mercatormap-example.tex` for a compilable full example. Note to do all preparations documented in Section 1.2 on page 6.

2.1 Reference Position

With `/mermap/supply/type→P.29=reference` a map with a *reference position* is constructed. Here, Munich is taken as reference position and center of the map. Since the position is used more than once, it is stored with `\mrcNPdef→P.22` for further reference. With `/mermap/supply/flex reference scale→P.33` the scale is set to 1:6 000 000. For the background map tiles, a `/mermap/supply/source→P.36` is selected for download. This setup is done by `\mrcmap→P.35` while `\mrcdrawmap→P.50` draws the downloaded map tiles.

```
\begin{tikzpicture}
  \sffamily
  \mrcNPdef{munich}{48.137222}{11.575556}
  \mrcNPdef{vienna}{48.208333}{16.373056}
  \mrcNPdef{cologne}{50.938056}{6.956944}
  \mrcNPdef{milano}{45.4625}{9.186389}
  \mrcmap[type=reference,
    named position=munich,
    flex reference scale=6 000 000,
    source=topplusopen web,
    tex width=14cm,
    tex height=14cm]{examples_reference}
  \path[draw=yellow!50!gray,fill=yellow!20]
    ([xshift=-2mm,yshift=-5mm]mrcmap.south west) rectangle
    ([xshift=2mm,yshift=15mm]mrcmap.north east);
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \path[draw=yellow!50!gray] (mrcmap.south west) rectangle (mrcmap.north east);

  \mrcNPdraworthodrome[red,very thick]{munich}{milano}
  \path[blue,very thick] (\mrcNPcs{munich}) --
    node[red,fill=white,sloped,below] {\mrcNPprettyloxodistance{munich}{milano}}
    (\mrcNPcs{milano});

  \mermapsetmarker{type=pin, draw=red, fill=red!10, font=\sffamily\small}
  \mrcmarker{named position=munich, contents={M\unich}}
  \mrcmarker{named position=vienna, contents={Wien}}
  \mrcmarker{named position=cologne, contents={K\oln}}
  \mrcmarker{named position=milano, contents={Milano}}

  \node[above left=5mm,font=\Large\bfseries] at (mrcmap.north east) {Munich};


  \node[above right] at ([yshift=10mm]mrcmap.north west)
    {Scale \mrcprettymapscale};

  \mrcdrawscalebar[width-in-km=300,partitions=6,north-west-outside=0mm;5mm,
    single, height=1mm, major style={yellow!50!gray!50!black}]
  \path[every node/.style={above,inner sep=0.5mm,font=\sffamily\tiny}]
    (mrcscalebar.north west) -- (mrcscalebar.north east)
    node[pos=0]{0} node[pos=0.3333]{100} node[pos=0.6667]{200}
    node[pos=1]{300\,km};
```

```

\mrcdrawscalebar[width-in-mile=200,partitions=8,
  at={(mrcscalebar.south west)},placement=below right,
  single, height=1mm, major style={yellow!50!gray!50!black}]
\path[every node/.style={below,inner sep=0.5mm,font=\sffamily\tiny}]
  (mrcscalebar.south west) -- (mrcscalebar.south east)
  node[pos=0]{0} node[pos=0.25]{50} node[pos=0.5]{100} node[pos=0.75]{150}
  node[pos=1]{200\,miles};
\end{tikzpicture}


```

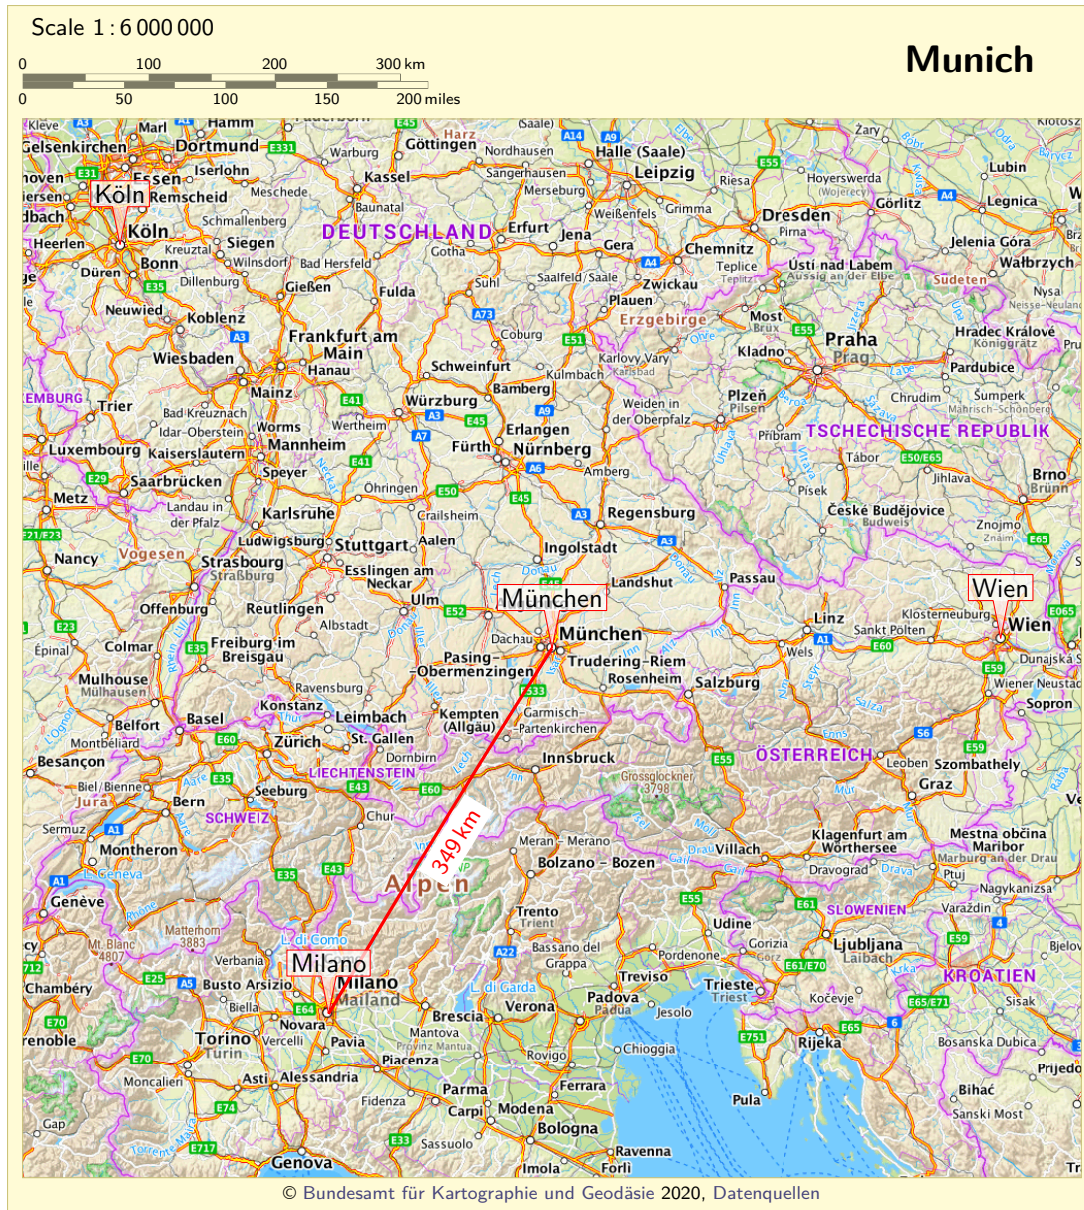

2.2 Fitting Area

With `/mermap/supply/type→P.29=areafit` a map is constructed where a given area is fitted in. The following example lists some US-American cities and constructs an `/mermap/supply/area→P.30` which contains all of them. With `/mermap/supply/flex area fit→P.34=15mm` a border region is added.

```
\begin{tikzpicture}
  \mrcNPdef{honolulu}{21.305225}{-157.867}
  \mrcNPdef{fairbanks}{64.8379435}{-147.7192214}
  \mrcNPdef{sandiego}{32.7146781}{-117.1640995}
  \mrcNPdef{miami}{25.7599333}{-80.1951257}
  \mrcNPdef{boston}{42.359744}{-71.061322}
  \mrcNPdef{denver}{39.7372435}{-104.997378}
  \mrcmap[type=areafit,
    area={honolulu,fairbanks,sandiego,miami,boston,denver},
    source=stamen terrain,
    tex width=15cm, tex height=11cm,
    flex area fit=15mm,
  ]{examples_fitting_area}
  \mrcdrawmap \mrcdrawnetwork
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \node[below left,fill=white,opacity=0.8,text opacity=1] at (mrcmap.north east)
    {Scale \mrcprettymapscale};
  \path[draw] (mrcmap.south west) rectangle (mrcmap.north east);
  \foreach \city in {honolulu,fairbanks,sandiego,miami,boston,denver}
    {\mrcmarker{type=ringx, draw=red, fill=red!20, named position=\city}}
\end{tikzpicture}
```

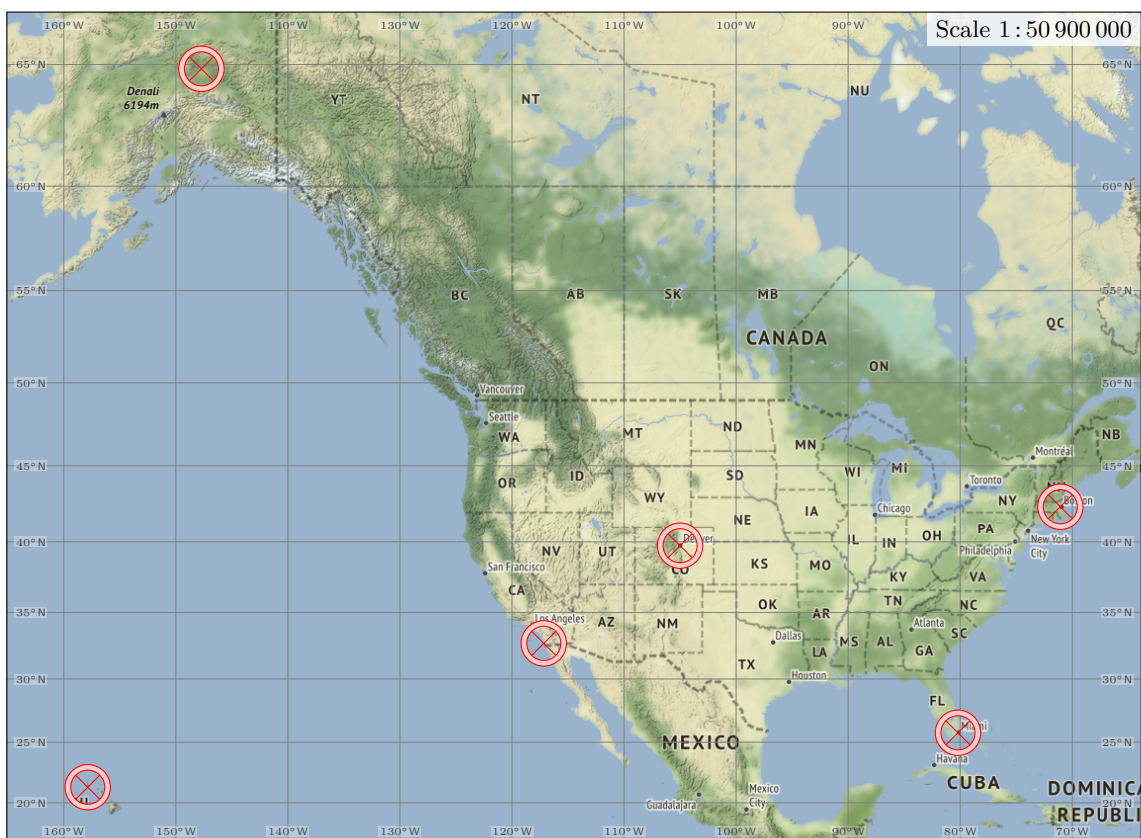


Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

2.3 Fixed Boundaries

With `/mermap/supply/type→P.29=boundaries` a map is constructed with fixed boundaries. In contrast to the other map types, the document map size cannot be given directly but derives from the map setup. This bears the risk of too large maps. The following example is a map with exact boundaries 45° S to 10° S and 110° E to 155° E. A decent `/mermap/supply/zoom→P.30` is 5 (every zoom step doubles the map size in each direction).

```
% \mrcsetapikey{openrouteservice}{YOUR-API-KEY} % registered key
\begin{tikzpicture}
  \mrcmap[type=boundaries,
    west=110,east=155,south=-45,north=-10,
    zoom=5,
    source=openrouteservice mapsurfer,
  ]{examples_boundaries}
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcdrawnetwork
  \mrcdrawscalebar[width-in-km=1000,partitions=4,south-west-inside=5mm,
    major style={blue!50!gray!50!black}]
  \path[every node/.style={below,inner sep=0.5mm,font=\sffamily\tiny}]
    (mrcscalebar.south west) -- (mrcscalebar.south east)
    node[pos=0]{0} node[pos=0.5]{500}
    node[pos=1]{1000} node[pos=1,right,yshift=1mm]{km};
  \mrcmarker{lat=-35.3,lon=149.116667,type=pictodropring,
    draw=red,fill=red!10}
\end{tikzpicture}
```

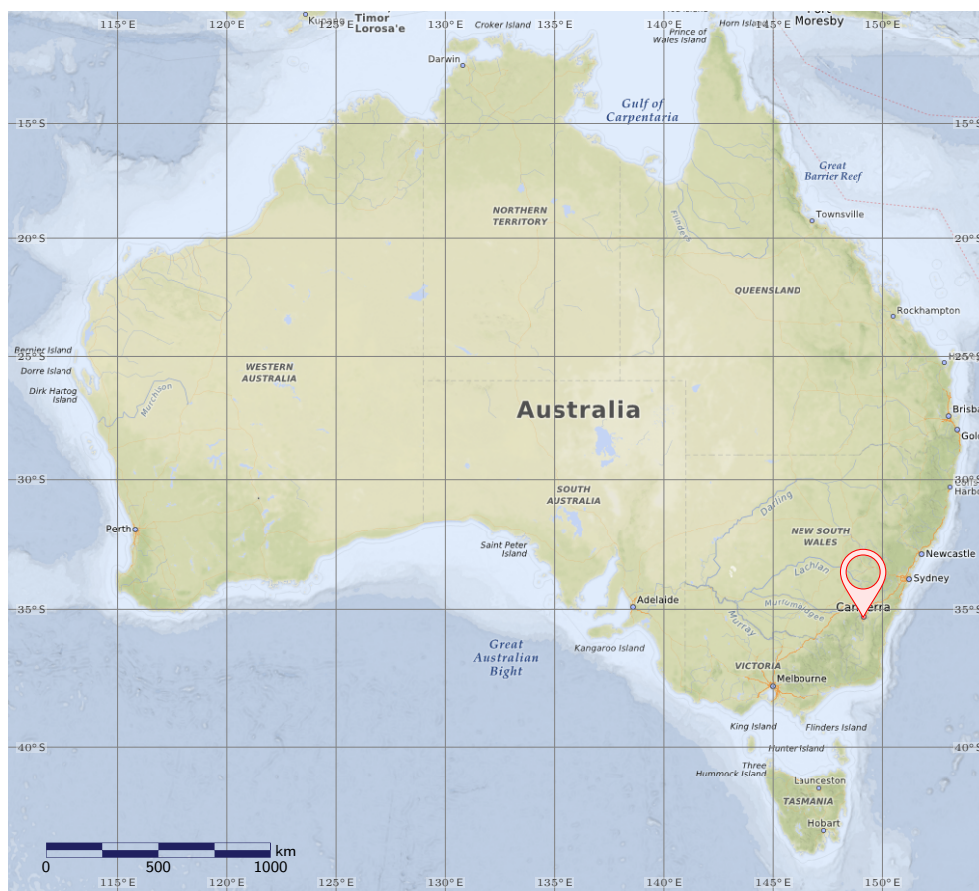

Service © openrouteservice.org | Map data © OpenStreetMap contributors

2.4 Map Without Map Tiles

There is no coercion to use downloaded map tiles, if they are not needed or wanted. With `/mermap/supply/target→P.31=none` no map tiles are downloaded. The following example draws a rough polygon shape of Germany using `mrcline*`^{→P.73}.

```
\begin{tikzpicture}
  \mrclinepdef{munich}{48.137222}{11.575556}
  \mrclinepdef{cologne}{50.938056}{6.956944}
  \mrclinepdef{hamburg}{53.550556}{9.993333}
  \mrclinepdef{berlin}{52.518611}{13.408333}
  \mrclinepmap[type=areafit,
    west=5,east=15,south=47,north=55,
    target=none,
    tex width=14cm, tex height=14cm,
    flex area fit=5mm
  ]{examples_routemap}
  \mrclineclipmap
  \path[draw,fill=yellow!5] (mrclinep.south west) rectangle (mrclinep.north east);
  \begin{mrcline*}[
    preaction={fill=black,opacity=.5,
      transform canvas={xshift=1mm,yshift=-1mm}},
    draw      = green!50!black,
    top color = green!50!gray!5,
    bottom color = green!50!gray!15]
    \mrclinepoint{47.57268069220318}{8.07968771809688}
    \mrclinepoint{47.55206513030159}{8.458302263852103}
    \mrclinepoint{47.60652271644701}{8.58564576447632}
    \mrclinepoint{47.65002478441761}{8.475977737743394}
    \mrclinepoint{47.8129149100372}{8.621611270810012}
    \mrclinepoint{47.70405949548734}{8.824753417980977}
    \mrclinepoint{47.57118357939037}{9.373387060586875}
    \mrclinepoint{47.57763968687206}{9.783024034250792}
    \mrclinepoint{47.46598581489455}{10.09335967295321}
    \mrclinepoint{47.28014625489598}{10.22678291669482}
    \mrclinepoint{47.32098723021947}{10.40092026792467}
    \mrclinepoint{47.52413897927237}{10.53589647271817}
    \mrclinepoint{47.5130331145614}{10.94403341747166}
    \mrclinepoint{47.39097338968944}{11.04734763681045}
    \mrclinepoint{47.42252867275465}{11.44170163808758}
    \mrclinepoint{47.57832219946236}{11.64025530020549}
    \mrclinepoint{47.65203740659043}{12.2451260343467}
    \mrclinepoint{47.64005851006706}{12.78135708694006}
    \mrclinepoint{47.42189293170733}{13.06242166895717}
    \mrclinepoint{47.68727761120528}{13.13421507093485}
    \mrclinepoint{47.70570852317097}{12.97737528172392}
    \mrclinepoint{47.86836520373472}{12.94442906710615}
    \mrclinepoint{48.06063312315187}{12.76937524145701}
    \mrclinepoint{48.33220372303314}{13.38497370385176}
    \mrclinepoint{48.57060635511297}{13.55281830406328}
    \mrclinepoint{48.51465473490364}{13.78916086481733}
    \mrclinepoint{48.74889509826911}{13.84448153318651}
    \mrclinepoint{48.95974762545411}{13.50952525317658}
    \mrclinepoint{49.37838143356481}{12.77000417129028}
    \mrclinepoint{49.78495654813383}{12.44617209199484}
    \mrclinepoint{49.93155217044134}{12.49159565814237}
    \mrclinepoint{50.13144236663469}{12.24546848540114}
    \mrclinepoint{50.28771270517358}{12.30810150664619}
```

```


\mrcpoint{50.40989390494432}{12.94903619964524}
\mrcpoint{50.65841629251407}{13.3075062965852}
\mrcpoint{50.76329878585482}{13.97452403458363}
\mrcpoint{51.02604511746936}{14.41278607347103}
\mrcpoint{50.79185062876172}{14.80477069337384}
\mrcpoint{51.15202957355457}{14.99270251686064}
\mrcpoint{51.34128169635556}{15.02098384386006}
\mrcpoint{51.53750266315752}{14.74120138252564}
\mrcpoint{51.81924062442433}{14.62724686001225}
\mrcpoint{52.11180711219343}{14.70514397703483}
\mrcpoint{52.39266284958671}{14.60756306378661}
\mrcpoint{52.60597277515545}{14.58725108586684}
\mrcpoint{52.88134471470577}{14.16977248675916}
\mrcpoint{53.14560306739344}{14.4215985570986}
\mrcpoint{53.43447627332744}{14.39440456086107}
\mrcpoint{53.76080228279986}{14.26477636730856}
\mrcpoint{54.07894830697219}{13.84113247149844}
\mrcpoint{54.34144910466647}{13.71477685386829}
\mrcpoint{54.57879841452108}{13.41784866398943}
\mrcpoint{54.38430816973541}{12.55218424463898}
\mrcpoint{54.16285895583508}{12.11170524536321}
\mrcpoint{54.11909611435144}{11.78253136604545}
\mrcpoint{53.9629318241985}{11.23001765303107}
\mrcpoint{54.02548042559235}{10.82100535035693}
\mrcpoint{54.20942342601608}{11.17572026938692}
\mrcpoint{54.42622022041155}{11.04601054827628}
\mrcpoint{54.31534430886417}{10.73027571352005}
\mrcpoint{54.4430955768925}{10.19233706975044}
\mrcpoint{54.8317448735389}{10.00757468096804}
\mrcpoint{54.87986478845961}{9.659528688958062}
\mrcpoint{54.8308224503691}{9.271730840012292}
\mrcpoint{54.92302453288877}{8.571394535898566}
\mrcpoint{54.49119535498197}{8.900730234661252}
\mrcpoint{54.34335254823343}{8.645116397508792}
\mrcpoint{54.22420563732749}{8.880431477246834}
\mrcpoint{53.87404422621243}{8.679945700393079}
\mrcpoint{53.54658560722722}{8.286556227539295}
\mrcpoint{53.7066272365128}{8.034813408953866}
\mrcpoint{53.78031118673399}{7.387421106389351}
\mrcpoint{53.51218238635882}{6.930006752473437}
\mrcpoint{53.25894778199789}{7.171145313101468}
\mrcpoint{52.64374200661974}{6.997019504055286}
\mrcpoint{52.55662475372522}{6.719778263650637}
\mrcpoint{52.38988292317155}{6.970320972580792}
\mrcpoint{51.92299983362206}{6.742905287863996}
\mrcpoint{51.88316670940459}{6.156741607019097}
\mrcpoint{51.79567780329431}{5.98801954642294}
\mrcpoint{51.43928428452571}{6.159613225461791}
\mrcpoint{51.0215877919207}{5.887936542477828}
\mrcpoint{50.79077378475993}{5.983374968822379}
\mrcpoint{50.59470107381249}{6.228393825507839}
\mrcpoint{50.33147032961352}{6.304617231833176}
\mrcpoint{50.15747573005454}{6.092865298740861}
\mrcpoint{49.97845765993797}{6.16527138749146}
\mrcpoint{49.78369815200002}{6.535162836379246}
\mrcpoint{49.45067080157749}{6.378063336429978}
\mrcpoint{49.11701097547841}{6.794068795882435}
\mrcpoint{49.14800972775451}{7.494253217695865}

```

```

\mrcpoint{49.03198382192998}{7.640486837553122}
\mrcpoint{48.92859396692077}{8.238456398546767}
\mrcpoint{48.61606185482966}{7.832853167339047}
\mrcpoint{48.05389084062409}{7.510556381211842}
\mrcpoint{47.56795313962416}{7.588782160556193}
\mrcpoint{47.57268069220318}{8.07968771809688}
\end{mrcroute*}
\foreach \city / \name in {munich/M\"unchen, cologne/K\"oln,
    hamburg/Hamburg, berlin/Berlin}
{
    \mrcmarker{named position=\city,type=knob,fill=red!20,draw=red,
        radius=2mm}
    \mrcmarker{named position=\city,type=pin,fill=blue!10,draw=blue,
        contents=\name}
}
\end{tikzpicture}


```

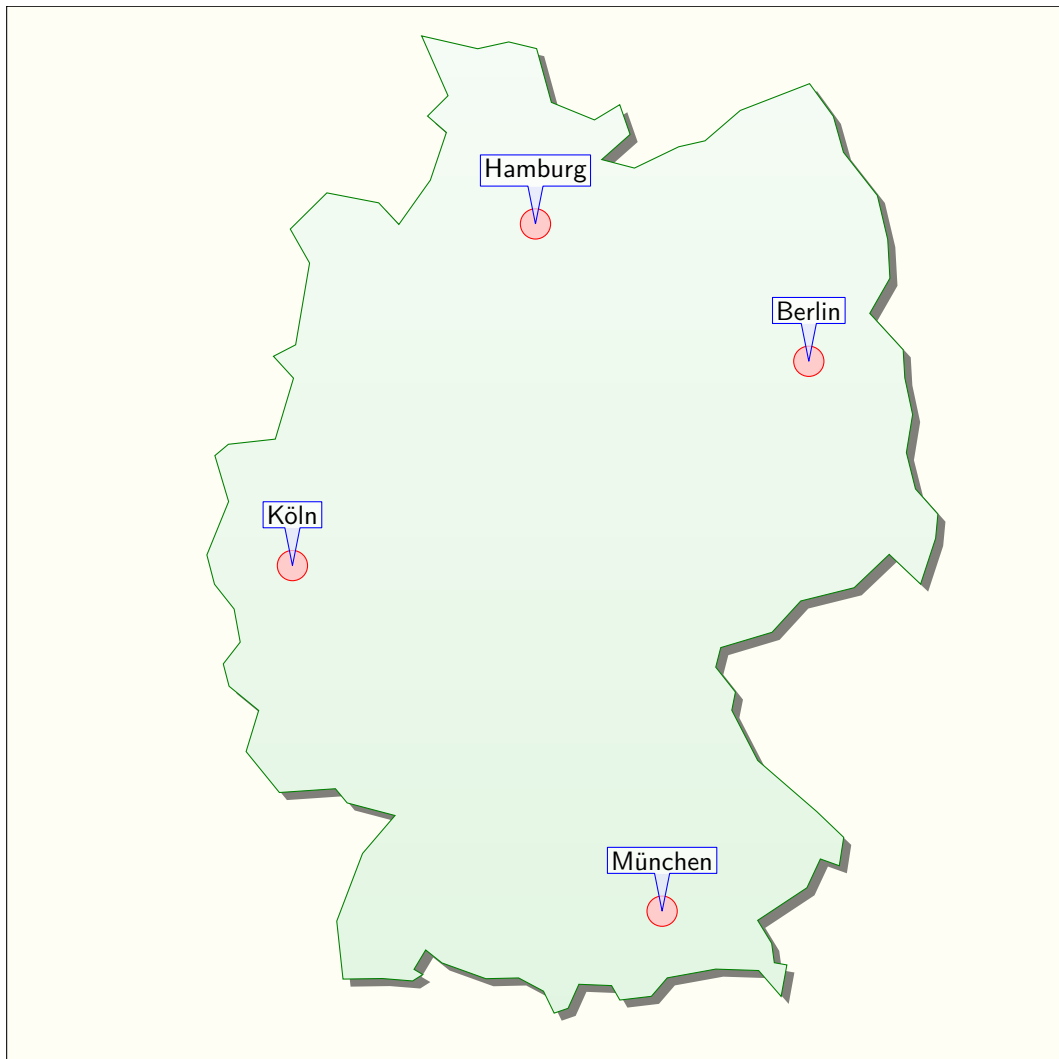

2.5 Alignment of the Reference Position

With `/mermap/supply/align`^{P.31} the reference position can be aligned at different map positions.


```
\mrcNPdef{munich}{48.137222}{11.575556}
\foreach \a in {east,center,west,north} {
\begin{tikzpicture}
  \mrcmap[type=reference,
    named position=munich,
    flex reference scale=1 000 000,
    source=opentopomap,
    tex width=\linewidth, tex height=3cm,
    align=\a]{examples_alignment_\a}
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution}; \mrcclipmap
  \tikzset{every node/.style={fill=white,fill opacity=0.8,text opacity=1}}
  \path[draw] (mrcmap.south west) rectangle (mrcmap.north east);
  \ifmrcNPinvicinity{munich}{
    \fill[red] (mrcpos) circle (4pt) node[below] {M"unchen};}{}
  \node[text=red,above left] at (mrcmap.south east) {align=\a};
\end{tikzpicture}
\par}
```

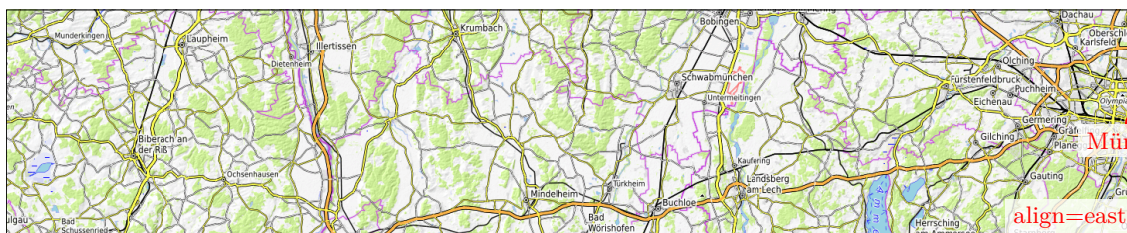

Kartendaten: © OpenStreetMap Mitwirkende, SRTM | Kartendarstellung: © OpenTopoMap (CC-BY-SA)



Kartendaten: © OpenStreetMap Mitwirkende, SRTM | Kartendarstellung: © OpenTopoMap (CC-BY-SA)

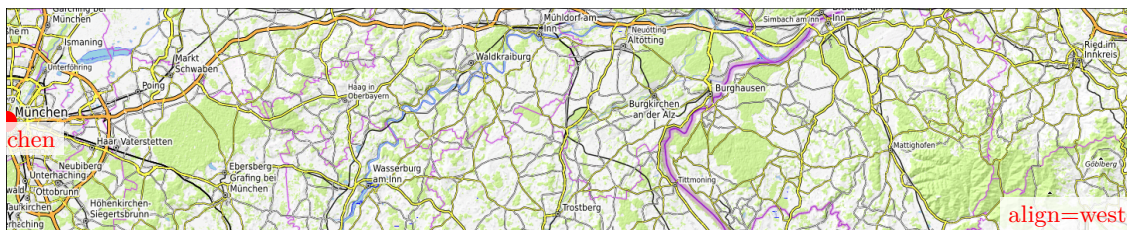

Kartendaten: © OpenStreetMap Mitwirkende, SRTM | Kartendarstellung: © OpenTopoMap (CC-BY-SA)





Kartendaten: © OpenStreetMap Mitwirkende, SRTM | Kartendarstellung: © OpenTopoMap (CC-BY-SA)

2.6 Flexible Zoom

Map tiles are only provided at fixed zoom levels with natural numbers, but the package allows a `/mermap/flex zoom`^{→P.51} with rational numbers. The flexible zoom is realized by combining a suitable fixed zoom with an adapted document tile scaling, see Section 5.2 on page 51. The following example shows a more or less smooth zoom increase. The same technique is used by all options starting with `flex`, e.g. `/mermap/supply/flex reference scale`^{→P.33} or `/mermap/supply/flex area fit`^{→P.34} as seen in the examples before.

```
% \mrcsetapikey{thunderforest}{YOUR-API-KEY} % registered key
\mrcNPdef{munich}{48.137222}{11.575556}
\foreach \zz in {7.0,7.2,...,9.0} {
\edef\z{\fpeval{round(\zz,1)}}
\begin{tikzpicture}
\mermapset{flex zoom=\z}
\mrcmap[type=reference,
named position=munich,
source=thunderforest outdoors,
tex width=\linewidth,
tex height=3cm
]{examples_flex_zoom_\z}
\mrcdrawmap
\mrcclipmap
\tikzset{every node/.style={fill=white,fill opacity=0.5,text opacity=1}}
\node[above,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
{\mrcmapattribution};
\path[draw] (mrcmap.south west) rectangle (mrcmap.north east);
\node[below left=2mm,align=right] at (mrcmap.north east)
{flex zoom=\fpeval{round(\z,1)}\ scale \mrcprettymapscale};
\ifmrcNPinvicinity{munich}{
\fill (mrcpos) circle (2pt) node[below] {M\"unchen};}{}
\end{tikzpicture}\par}
```

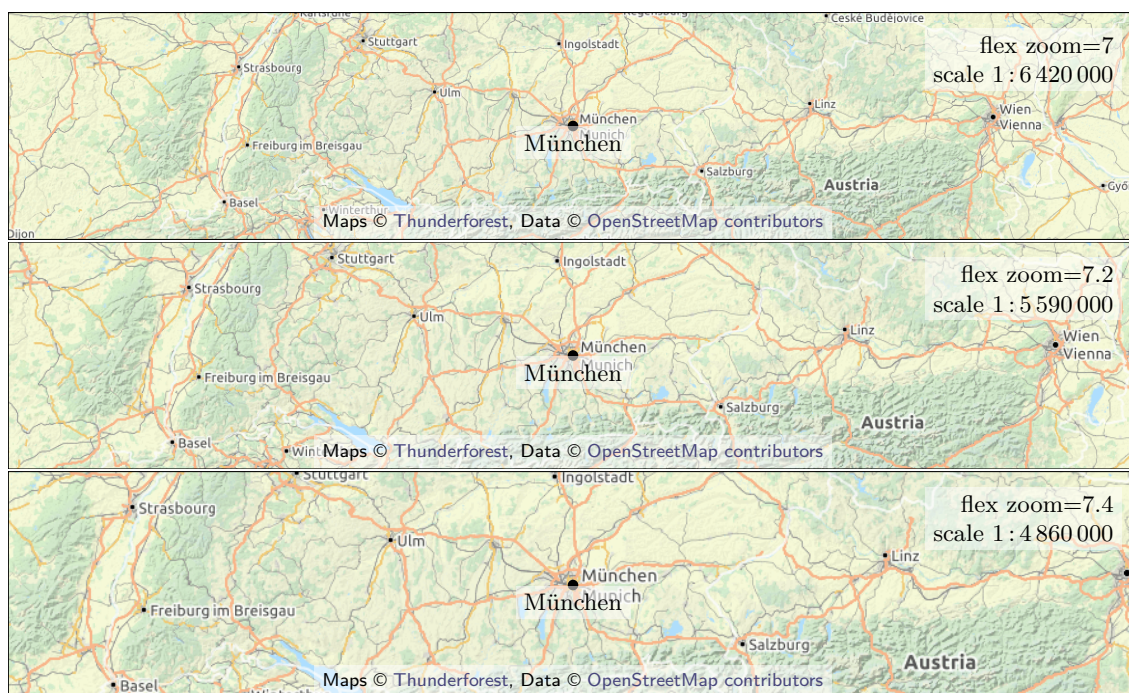

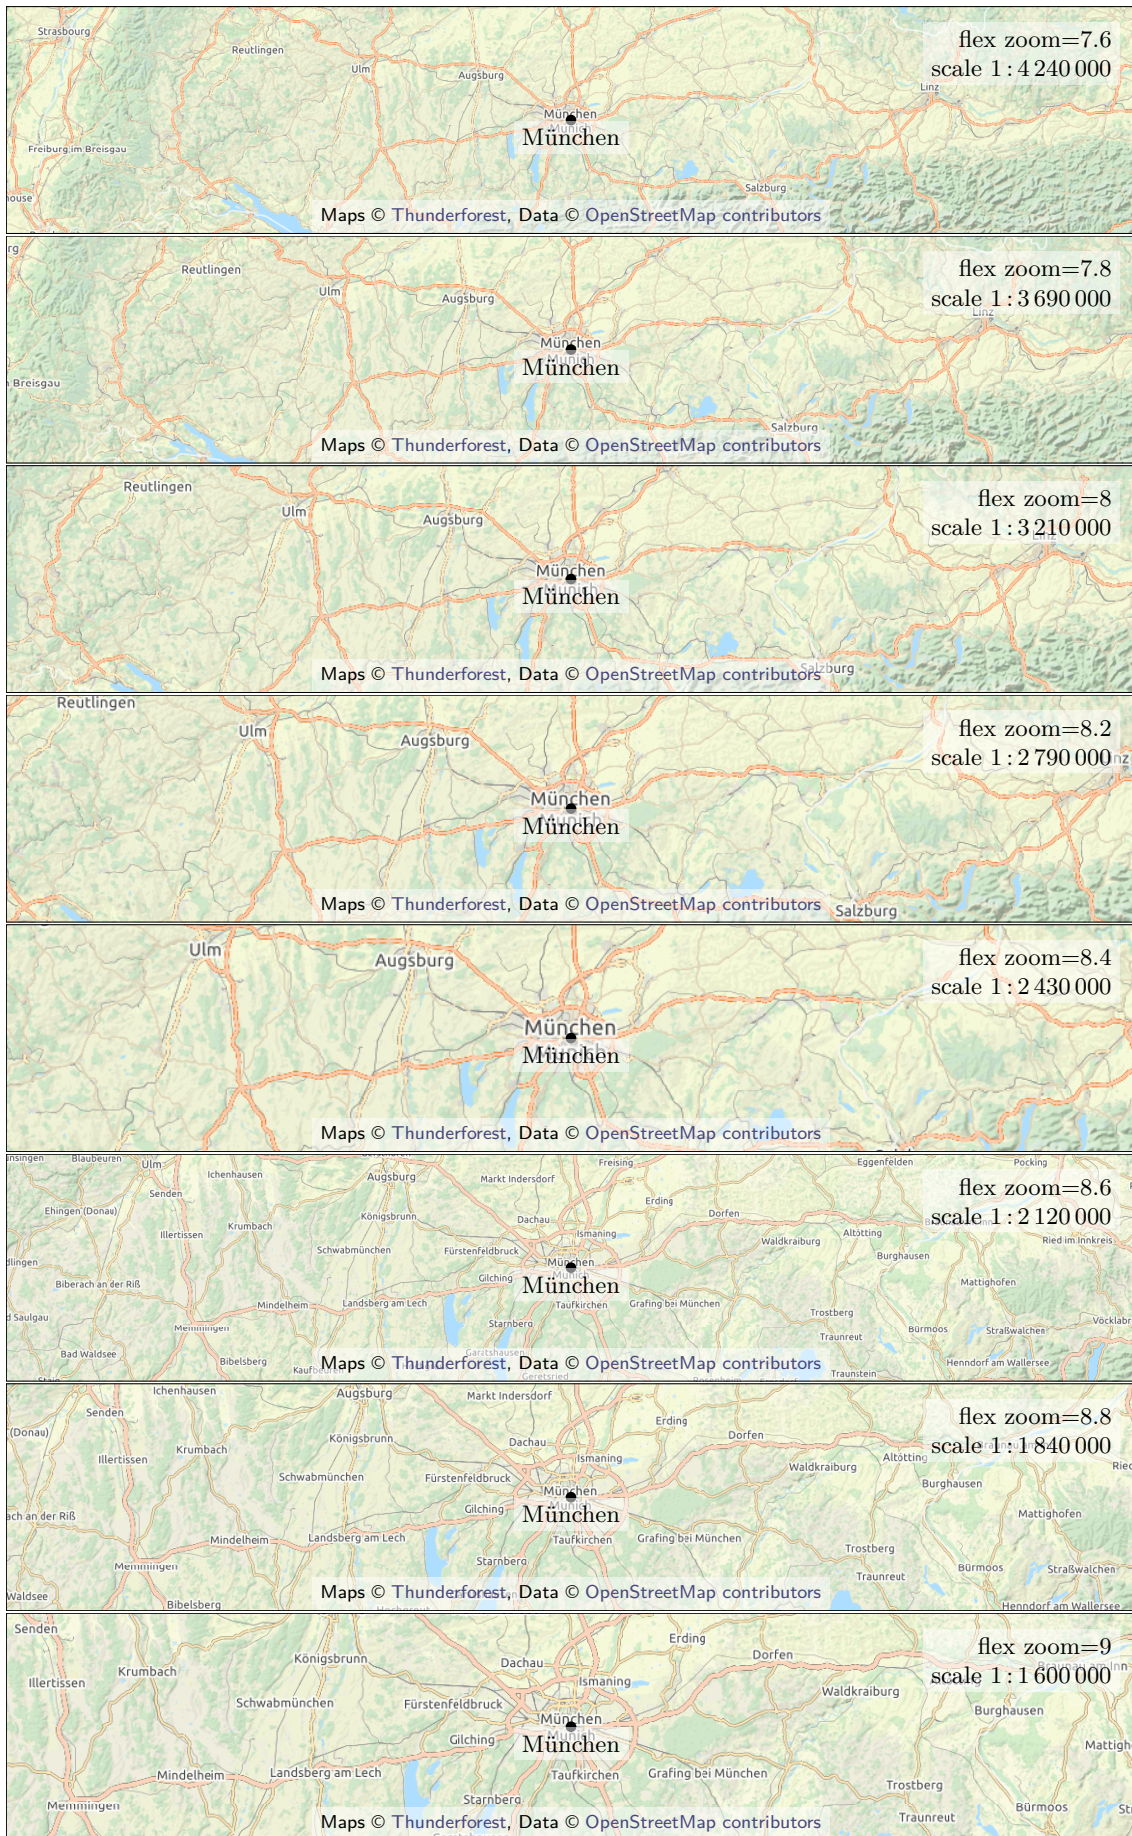


3 Map Definition and Map Coordinates

```

\begin{tikzpicture}
\mrcdefinemap{west=11,east=13,north=49,south=48}
\mrcdrawmap[draw=path]
\mrcdrawnetwork
\draw      (mrc cs:latitude=48.53475,longitude=12.15087)  circle (2mm);
\draw[red] (mrc cs:lat=48.53475,lon=12.15087)             circle (3mm);
\draw[blue] (mrcq cs:48.53475:12.15087)                   circle (4mm);
\ifmrcinmap{48.53475}{12.15087}{\draw[yellow] (mrcpos) circle (5mm);}{\draw[cyan] (mrcpos) circle (6mm);}
\end{tikzpicture}

```

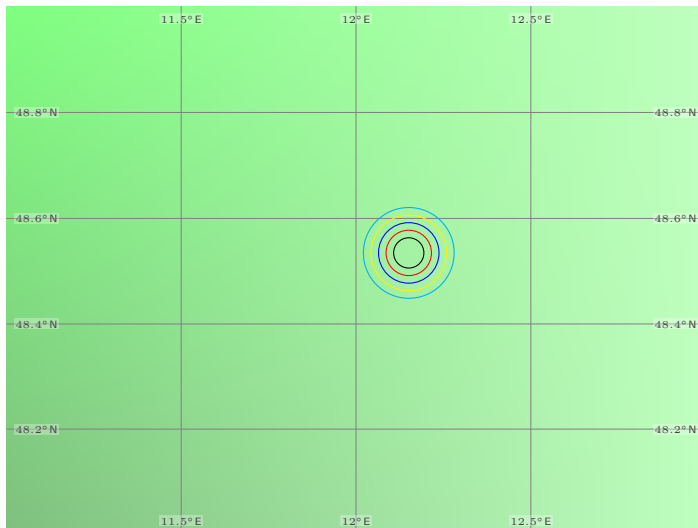

3.1 Option Setting

\mermapset{*options*}

Sets *options* for all following maps inside the current \TeX group. All options share the common prefix `/mermap/`, e.g. for setting `/mermap/vicinity`^{→ P. 23} use

```
\mermapset{vicinity=3cm}
```

Also see `\mrcdefinemap`^{→ P. 18}, `\mermapsetsupply`^{→ P. 29}, and `\mermapsetmarker`^{→ P. 62}.

Note that the options by `\mermapset` are `expl3` [3] keys while `TikZ` [2] uses its own key management.

3.2 Manual Map Definition

The following map definition is only relevant, if no script setup is used and maps are generated completely manually. See Section 4 on page 27 for script aided map definitions.

\mrcdefinemap{*<options>*}

Establishes a map inside a `tikzpicture` environment following and applying the given *<options>*. All options share the common prefix `/mermap/mapdef/`. After `\mrcdefinemap` is applied, map drawing and map coordinates can be used.

- `\mrcdefinemap` can be used directly, if no tile download and no script setup is intended.
- `\mrcdefinemap` is implicitly used with `\mrcapplymap`^{→P.35} and `\mrcmap`^{→P.35}. In this case, all options are also set implicitly.

/mermap/mapdef/north=*<map north latitude>* (no default, initially 50)

Northern latitude degree of the visible map, possibly negative for the southern hemisphere, lower than 90 but always larger than `/mermap/mapdef/south`. It is accessible as `\mrcmapnorth` (use read-only).

/mermap/mapdef/south=*<map south latitude>* (no default, initially 48)

Southern latitude degree of the visible map, possibly negative for the southern hemisphere, larger than -90 but always lower than `/mermap/mapdef/north`. It is accessible as `\mrcmapsouth` (use read-only).

/mermap/mapdef/west=*<map west longitude>* (no default, initially 11)

Western longitude degree of the visible map, possibly negative for the western hemisphere, possibly shifted periodically, but always lower than `/mermap/mapdef/east`. It is accessible as `\mrcmapwest` (use read-only).

/mermap/mapdef/east=*<map east longitude>* (no default, initially 13)

Eastern longitude degree of the visible map, possibly negative for the western hemisphere, possibly shifted periodically, but always larger than `/mermap/mapdef/west`. It is accessible as `\mrcmapeast` (use read-only).

3.3 Further Map Definition Options

The following options are typically implicitly set by `\mrcapplymap`^{→P.35} and not manually by `\mrcdefinemap`. However, some values are computationally used in all cases. They can be ignored as pure technical information.

/mermap/mapdef/xmin=*<map tile x minimum>* (no default, initially 271)

Minimal *x* coordinate of the map tiles.

/mermap/mapdef/xmax=*<map tile x maximum>* (no default, initially 275)

Maximal *x* coordinate of the map tiles.

/mermap/mapdef/ymin=*<map tile y minimum>* (no default, initially 173)

Minimal *y* coordinate of the map tiles.

/mermap/mapdef/ymax=*<map tile y maximum>* (no default, initially 177)

Maximal *y* coordinate of the map tiles.

/mermap/mapdef/zoom=*<map zoom>* (no default, initially 9)

Map tile zoom factor alias *z* coordinate of the map tiles.

/mermap/mapdef/pixelwidth=*<map width in pixels>* (no default, initially 100)

Width of the visible map expressed in pixels of the source file(s). It is accessible as `\mrcpixelwidth` (use read-only).

/mermap/mapdef/pixelheight=*<map height in tiles>* (no default, initially 100)
 Height of the visible map expressed in pixels of the source file(s). It is accessible as **\mrcpixelheight** (use read-only).

/mermap/mapdef/westoffset=*<map tile offset (west)>* (no default, initially 0)
 Distance of the visible map from the western edge of the most western tile expressed in tiles (range from 0 to 1).

/mermap/mapdef/northoffset=*<map tile offset (north)>* (no default, initially 0)
 Distance of the visible map from the northern edge of the most northern tile expressed in tiles (range from 0 to 1).

/mermap/mapdef/southoffset=*<map tile offset (south)>* (no default, initially 0)
 Distance of the visible map from the southern edge of the most southern tile expressed in tiles (range from 0 to 1).

/mermap/mapdef/basename=*<map tile base name>* (no default, initially **tiles/tile**)
 File base name for the tiles.

/mermap/mapdef/attribution=*<attribution text>* (no default, initially empty)
 Attribution text for the map source. Typically, it acknowledges the copyright of the map data provider. It may contain hyperlinks. It is accessible as **\mrcmapattribution** (use read-only).

/mermap/mapdef/attribution print=*<attribution text>* (no default, initially empty)
 Attribution text for the map source. In contrast to **/mermap/mapdef/attribution** it is intended for media that does not support hyperlinks like printed posters, books, etc. It is accessible as **\mrcmapattributionprint** (use read-only).

/mermap/mapdef/resource=*<map resource>* (no default, initially **none**)
 Available map resource with following feasible values:


- **none**: No tiles and no merged map.
- **tiles**: Map tiles locally available.
- **mergedmap**: Single map picture file merged from tiles locally available.
- **wmsmap**: Single map picture file locally available.

/mermap/mapdef/tile size=*<length>* (no default, initially 32.512mm)
 Typically set computationally. It is identical to **/mermap/tile size**^{→ P. 51} which is the recommended user option for manual setup.

3.4 Map Coordinate System

After a map is defined inside a `tikzpicture` environment by `\mrcdefinemap`^{P.18}, `\mrcapplymap`^{P.35}, or `\mrcmap`^{P.35}, a Mercator map coordinate system can be used. The border of the visible map is denoted by a TikZ node `mrcmap`.

```
\begin{tikzpicture}
  \mrcNPdef{nuremberg}{49.45522}{11.07631}
  \mermapset{tile size=2cm}
  \mrcdefinemap{west=5,east=15,south=47,north=55,zoom=7}
  \path[draw,fill=green!10] (mrcmap.south west) rectangle (mrcmap.north east);
  \mrcdrawnetwork
  \fill (mrc cs:latitude=48.137222,longitude=11.575556) circle (2pt)
    node[below] {M\"unchen};
  \fill (mrc cs:lat=53.550556,lon=9.993333) circle (2pt)
    node[above] {Hamburg};
  \fill (mrcq cs:52.518611:13.408333) circle (2pt)
    node[left] {Berlin};
  \fill (\mrcNPcs{nuremberg}) circle (2pt) node[above] {N\"urnberg};
  \ifmrcinmap{50.938056}{6.956944}{
    \fill (mrcpos) circle (2pt) node[right] {K\"oln};}{}
  \ifmrcPinmap{nuremberg}{\draw[red] (mrcpos) circle (1cm);}{}
\end{tikzpicture}
```

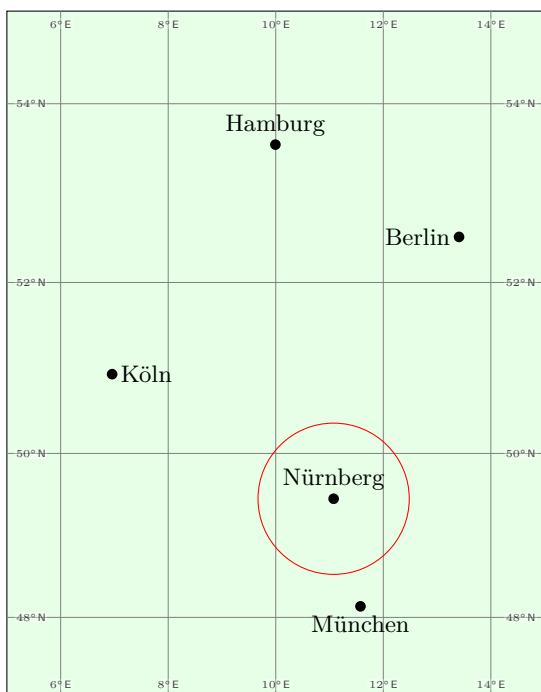

The `mrc cs` coordinate system defines a map point by `/mermap/cs/latitude` and `/mermap/cs/longitude`

`/mermap/cs/latitude`=*<latitude>* (no default)

Sets the *<latitude>* of a map point.

`/mermap/cs/longitude`=*<longitude>* (no default)

Sets the *<longitude>* of a map point.

```
\fill (mrc cs:latitude=48.137222,longitude=11.575556) circle (2pt);
```

A map point can also be defined by shorter variants `/mermap/cs/lat`^{→ P. 21} and `/mermap/cs/lon`^{→ P. 21}

`/mermap/cs/lat=⟨latitude⟩` (no default)

Sets the `⟨latitude⟩` of a map point.

`/mermap/cs/lon=⟨longitude⟩` (no default)

Sets the `⟨longitude⟩` of a map point.

```
\fill (mrc cs:lat=48.137222,lon=11.575556) circle (2pt);
```

A map point can be defined even quicker by `(mrcq cs:⟨latitude⟩:⟨longitude⟩)`.

```
\fill (mrcq cs:48.137222:11.575556) circle (2pt);
```

`\mrcpgfpoint{⟨latitude⟩}{⟨longitude⟩}`

Yields a low level `pgf` point location given by `⟨latitude⟩` and `⟨longitude⟩`. This can be used like `\pgfpoint`.

```
\pgfpathcircle{\mrcpgfpoint{49.45522}{11.07631}}{2pt}  
\pgfusepath{fill}
```

3.5 Named Positions

`\mrcNPdef{⟨name⟩}{⟨latitude⟩}{⟨longitude⟩}`

A coordinate pair of *⟨latitude⟩* and *⟨longitude⟩* can be saved as *named position* (NP) to a *⟨name⟩* for later use. The *named position* just stores the given values as evaluated floating points but without coordinate system processing. Therefore, a named position can be used outside a map definition or `tikzpicture` environment, even as a preset for the whole document. Note that this saving is not global but only effective inside the current \TeX group.

```
\mrcNPdef{nuremberg}{49.45522}{11.07631}
```

`\mrcNPfrompoint{⟨name⟩}{⟨TikZ point⟩}`

Latitude and *longitude* of a given *⟨TikZ point⟩* are calculated and saved as *named position* (NP) with given *⟨name⟩*. `\mrcNPfrompoint` can only be used after a valid a map definition inside a `tikzpicture` environment.

```
\mrcNPfrompoint{mapcenter}{mrcmap.center}  
\mrcNPfrompoint{mytest}{[xshift=1cm,yshift=1cm]mrcmap.south west}
```

`\mrcNPcs{⟨name⟩}`

A map point definition from the *⟨name⟩* of a previously saved *named position* (NP).

```
\fill (\mrcNPcs{nuremberg}) circle (2pt) node[above] {N\"urnberg};
```

`\mrcNPlat{⟨name⟩}`

Inserts the *latitude* of a *named position* with given *⟨name⟩*. `\mrcNPlat` is expandable and may be used in floating point expressions.

```
\mrcNPdef{nuremberg}{49.45522}{11.07631}  
Latitude: \mrcNPlat{nuremberg}\  
Longitude: \mrcNPlon{nuremberg}
```

```
Latitude: 49.45522  
Longitude: 11.07631
```

`\mrcNPlon{⟨name⟩}`

Inserts the *longitude* of a *named position* with given *⟨name⟩*. `\mrcNPlon` is expandable and may be used in floating point expressions.

3.6 Tests for Points to be inside or outside a Map

When a map is drawn, `\mrcclipmap`^{P.50} can be used to set up a TikZ clip environment which automatically removes all content which is not inside the defined map. However, the TikZ position of a geographic point has to be computed first to decide, if this point is to be drawn. Since T_EX length registers do not allow large dimensions, compiler errors are possible to happen.

The following tests check given geographic coordinates before they are transformed to T_EX dimensions and avoid such compiler errors.

`\ifmrcinmap`{*latitude*}{*longitude*}{*true*}{*false*}

If the given *latitude* and *longitude* describes a point inside the visible map, the *true* code is executed, otherwise the *false* code.

Inside the *true* code a TikZ coordinate `mrcpos` describes the given point. Also, `mrclastpos` denotes the *last* position before.

```
\ifmrcinmap{48.137222}{11.575556}{\fill (mrcpos) circle (2pt);}{}

```

`\ifmrcNPinmap`{*name*}{*true*}{*false*}

If the given *named position* (NP) *name* describes a point inside the visible map, the *true* code is executed, otherwise the *false* code.

```
\mrcNPdef{munich}{48.137222}{11.575556}
\ifmrcNPinmap{munich}{\fill (mrcpos) circle (2pt);}{}

```

Very similar to `\ifmrcinmap` is `\ifmrcinvicinity`.

`\ifmrcinvicinity`{*latitude*}{*longitude*}{*true*}{*false*}

If the given *latitude* and *longitude* describes a point inside a vicinity of the visible map, i.e. the map *plus* a margin of `/mermap/vicinity`, the *true* code is executed, otherwise the *false* code.

Inside the *true* code a TikZ coordinate `mrcpos` describes the given point. Also, `mrclastpos` denotes the *last* position before.

`\ifmrcinvicinity` may be used for objects of a certain size like markers which could be partly visible even when their reference point is outside the visible map (but nearby).

```
\ifmrcinvicinity{48.137222}{11.575556}{\fill (mrcpos) circle (2pt);}{}

```

`\ifmrcNPinvicinity`{*name*}{*true*}{*false*}

If the given *named position* (NP) *name* describes a point inside a vicinity of the visible map, the *true* code is executed, otherwise the *false* code, see `\ifmrcinvicinity`.

```
\mrcNPdef{munich}{48.137222}{11.575556}
\ifmrcNPinvicinity{munich}{\fill (mrcpos) circle (2pt);}{}

```

`/mermap/vicinity`=*width* (no default, initially 2cm)

The vicinity of the map is the given map plus a border in all directions with the given *width*.

3.7 Formatted Coordinate Output

`\mrcformlat`[*<options>*]{*<latitude>*}

Formatted output for a given *<latitude>* following given *<options>*. Formatting *<options>* are described in the following.

Latitude from `\mrcformlat{-24.29}` to `\mrcformlat{12.3456789}`.

Latitude from 24.2900° S to 12.3457° N.

`\mrcformlon`[*<options>*]{*<longitude>*}

Formatted output for a given *<longitude>* following given *<options>*. Formatting *<options>* are described in the following.

Longitude from `\mrcformlon{-24.29}` to `\mrcformlon{12.3456789}`.

Longitude from 24.2900° W to 12.3457° E.

`/mermap/format angle=<type>` (no default, initially `decimal-4`)

The *<type>* defines some formatting settings for `\mrcformlat` and `\mrcformlon`. Internally, the `\ang` macro from package `siunitx` [5] is used which can be controlled by further settings of `siunitx` like digit grouping or changing the decimal marker.

Feasible values for *<type>* are

- `decimal`: decimal output without rounding.

`\mermapset{format angle=decimal}`
Longitude from `\mrcformlon{-24.29}` to `\mrcformlon{12.3456789}`.

Longitude from 24.29° W to 12.3456789° E.

- `decimal-0`: decimal output with rounding to full degrees.

`\mermapset{format angle=decimal-0}`
Longitude from `\mrcformlon{-24.29}` to `\mrcformlon{12.3456789}`.

Longitude from 24° W to 12° E.

- `decimal-1`: decimal output with rounding to one place.

`\mermapset{format angle=decimal-1}`
Longitude from `\mrcformlon{-24.29}` to `\mrcformlon{12.3456789}`.

Longitude from 24.3° W to 12.3° E.

- `decimal-2`: decimal output with rounding to two places.

`\mermapset{format angle=decimal-2}`
Longitude from `\mrcformlon{-24.29}` to `\mrcformlon{12.3456789}`.

Longitude from 24.29° W to 12.35° E.

- **decimal-3**: decimal output with rounding to three places.

```
\mermapset{format angle=decimal-3}
Longitude from \mrcformlon{-24.29} to \mrcformlon{12.3456789}.
```

Longitude from 24.290° W to 12.346° E.

- **decimal-4**: decimal output with rounding to four places.

```
\mermapset{format angle=decimal-4}
Longitude from \mrcformlon{-24.29} to \mrcformlon{12.3456789}.
```

Longitude from 24.2900° W to 12.3457° E.

- **degree**: output with rounding to full degrees. This is an alias for **decimal-0**.

```
\mermapset{format angle=degree}
Longitude from \mrcformlon{-24.29} to \mrcformlon{12.3456789}.
```

Longitude from 24° W to 12° E.

- **minute**: output with rounding to degrees and full minutes.

```
\mermapset{format angle=minute}
Longitude from \mrcformlon{-24.29} to \mrcformlon{12.3456789}.
```

Longitude from 24°17' W to 12°21' E.

- **second**: output with rounding to degrees, minutes, and full seconds.

```
\mermapset{format angle=second}
Longitude from \mrcformlon{-24.29} to \mrcformlon{12.3456789}.
```

Longitude from 24°17'24" W to 12°20'44" E.

/mermap/format south=*<code>* (no default, initially #1\,S)
 Defines the format *<code>* for a negative latitude. Use #1 to place the number (without sign).

```
\mermapset{format south={${-#1$}}
Latitude \mrcformlat{-24.29}.
```

Latitude -24.2900°.

/mermap/format north=*<code>* (no default, initially #1\,N)
 Defines the format *<code>* for a non-negative latitude. Use #1 to place the number.

```
\mermapset{format north={#1 North}}
Latitude \mrcformlat{12.3456789}.
```

Latitude 12.3457° North.

/mermap/format east= $\langle code \rangle$ (no default, initially #1\,E)

Defines the format $\langle code \rangle$ for a positive longitude. Use #1 to place the number (without sign).

```
\mermapset{format east={#1\,0}}  
\sisetup{output-decimal-marker={,}}  
L"angengrad \mrcformlon{12.3456789}.
```

Längengrad 12,3457° O.

/mermap/format west= $\langle code \rangle$ (no default, initially #1\,W)

Defines the format $\langle code \rangle$ for a negative longitude. Use #1 to place the number.

```
\mermapset{format west={West: #1}}  
Longitude \mrcformlon{-24.29}.
```

Longitude West: 24.2900°.

/mermap/format NEWS numeric (no value)

Defines the format for north, east, west, and south as numeric value without N, E, W, S.

```
\mermapset{format NEWS numeric}  
Longitude \mrcformlon{-24.29} and \mrcformlon{12.3456789}.\\  
Latitude \mrcformlat{-24.29} and \mrcformlat{12.3456789}.
```

Longitude -24.2900° and 12.3457°.

Latitude -24.2900° and 12.3457°.

/mermap/format NEWS absolute (no value)


Defines the format for north, east, west, and south as absolute value without N, E, W, S and without algebraic sign.

```
\mermapset{format NEWS absolute}  
Longitude \mrcformlon{-24.29} and \mrcformlon{12.3456789}.\\  
Latitude \mrcformlat{-24.29} and \mrcformlat{12.3456789}.
```

Longitude 24.2900° and 12.3457°.

Latitude 24.2900° and 12.3457°.

4 Automated Map Definition and Map Tiles

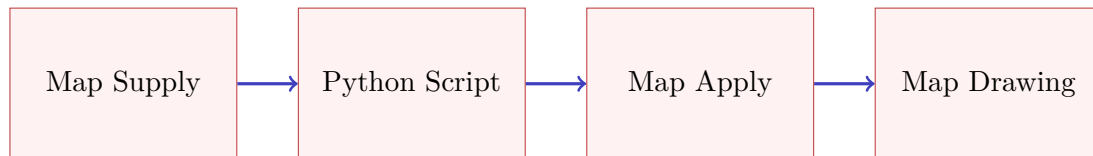

As illustrated above, the script aided map definition is a process with several stages.

- Map Supply: `\mrctsupplymap`^{→P.29} is the replacement of the manual setup by `\mrctdefinemap`^{→P.18}. Actually, it is quite similar to `\mrctdefinemap`^{→P.18}. With `\mrctsupplymap`^{→P.29} directions for the following Python script are formulated.
- Python Script: The script is executed by `\mrctsupplymap`^{→P.29} during compilation. It does some coordinate system computations and downloads map tiles from a Web server. Finally, it writes a map definition into a file `<id>.def`.
- Map Apply: `\mrctapplymap`^{→P.35} reads and applies the map definition from `<id>.def`.
- Map Drawing: Afterwards, the map can be drawn by `\mrctdrawmap`^{→P.50} and other commands.

A map can be applied more than once, e.g. reused later in the document. If this is not needed, map supply and map apply can be combined by `\mrctmap`^{→P.35}.

4.1 Script Activation

Remember to install Python beforehand, see Section 1.2 on page 6.

`\mrctactivatescript`

Use this inside the preamble of your document to activate the accompanying Python script. Without this command, the script is not executed! If the document is final (or the maps are final), this line could be removed and the document should be compilable without script.

`/mermap/python=<python>`

(no default, initially `python`)


Names the Python 3 interpreter as `<python>`. If your Python 3 interpreter is not called `python`, but e.g. `python3`, then use

```
\mermapset{python=python3}
```

4.2 Map Types


Currently, there are three methods provided how a map is computed by the accompanying Python script. The technical background is documented in [1, Section 5].

1. `/mermap/supply/type→P.29=reference`:



The default method determines the map dimensions from a reference position and given document map dimensions. Also, a zoom level `/mermap/supply/zoom→P.30` is required which relates to the Web Mercator map tile covering of the Earth. A higher zoom level gives a growing number of smaller map tiles. Alternative to the zoom level, a `<scale denominator>` can be provided by `/mermap/supply/flex area scale→P.33`, `/mermap/flex scale→P.52` or `/mermap/supply/flex reference scale→P.33` which determines the zoom level implicitly. As default, the reference position is the center of the map, but can be aligned at the map borders. This method is quite safe to use and could be the preferred one for many applications like showing the neighborhood of a route target. Finding the best reference point for depicting a certain area could be more tricky.

2. `/mermap/supply/type→P.29=areafit`:



The map dimensions are determined by an area with latitude and longitude boundaries which is fitted into given document map dimensions. The zoom level is computed accordingly for a fixed document tile size or by `/mermap/supply/flex area fit→P.34`. In any case, the map contains the target area plus some protrusion. This method is also quite safe to use and may be the preferred one for many applications like showing a map which contains a bunch of markers (e.g. for locations of universities). If the map borders are required to exactly meet the boundaries, the third method can be regarded.

3. `/mermap/supply/type→P.29=boundaries`:



The most obvious method determines the map dimensions from latitude and longitude boundaries. For this, a corresponding zoom level `/mermap/supply/zoom→P.30` is required which relates to the Web Mercator map tile covering of the Earth. Alternative to the zoom level, a `<scale denominator>` can be provided by `/mermap/supply/flex area scale→P.33` or `/mermap/supply/flex reference scale→P.33` which determines the zoom level implicitly. Note that a too high zoom level imposes the risk of downloading an unwanted high quantity of map tiles resulting in a much too large document map. Therefore, this most obvious method is *not recommended* for the beginner and may be explored after some experience.

4.3 Map Supply

`\mrscopymap[<options>]{<definition>}`

The *<options>* provide parameters for the Python 3 script to supply all materials for a map. All options share the common prefix `/mermap/supply/`.

The map is identified by

`<id>=/mermap/definition prefix+<definition>`

for later drawing. This identifier *<id>* has to be unique for the document. It corresponds to generated files *<id>.def*, *<id>.md5*, and possibly *<id>.png*. Do not use spaces or special characters like umlauts for *<definition>*.

If `\mrcactivatescript`^{→ P. 27} is used inside the preamble, `\mrscopymap` executes the Python 3 script, otherwise nothing happens.

`\mermapsetsupply{<options>}`

Sets *<options>* for all following maps inside the current T_EX group. All options share the common prefix `/mermap/supply/`, e.g. for setting `/mermap/supply/type` use

`\mermapsetsupply{type=reference}`

Also see `\mermapset`^{→ P. 17} and `\mermapsetmarker`^{→ P. 62}.

`/mermap/definition prefix=<definition prefix>` (no default, initially `maps/`)

Prefix for map identifiers and generated map files, see `\mrscopymap` and `\mrcapplymap`^{→ P. 35}. Note that `/mermap/definition prefix` is not to be used inside the option list for `\mrscopymap`.

`/mermap/supply/type=<type>` (no default, initially `reference`)

The *<type>* defines the basic computation for the map. Feasible values are

- **reference**: «map with reference position»
The map is constructed from a given reference position `/mermap/supply/latitude`^{→ P. 30},
`/mermap/supply/longitude`^{→ P. 30},
a zoom level `/mermap/supply/zoom`^{→ P. 30},
map dimensions
`/mermap/supply/width`^{→ P. 31},
`/mermap/supply/height`^{→ P. 31},
and alignment `/mermap/supply/align`^{→ P. 31}.
- **areafit**: «map fitting an area»
The map is constructed from a given area boundaries
`/mermap/supply/west`^{→ P. 30},
`/mermap/supply/east`^{→ P. 30},
`/mermap/supply/north`^{→ P. 30},
`/mermap/supply/south`^{→ P. 30},
map dimensions
`/mermap/supply/width`^{→ P. 31},
`/mermap/supply/height`^{→ P. 31},
and alignment `/mermap/supply/align`^{→ P. 31}.
- **boundaries**: «map with boundaries»
The map is constructed from given boundaries
`/mermap/supply/west`^{→ P. 30},
`/mermap/supply/east`^{→ P. 30},
`/mermap/supply/north`^{→ P. 30},
`/mermap/supply/south`^{→ P. 30},
and zoom level `/mermap/supply/zoom`^{→ P. 30}.

- /mermap/supply/zoom**=*<setup zoom>* (no default, initially 9)
 Map tile zoom factor alias *z* coordinate of the map tiles. Used for map types **boundaries** and **reference**.
- /mermap/supply/north**=*<setup north latitude>* (no default, initially 50)
 Northern latitude degree, possibly negative for the southern hemisphere, lower than 90 but always larger than **/mermap/supply/south**. Used for map types **boundaries** and **areafit**.
- /mermap/supply/south**=*<setup south latitude>* (no default, initially 48)
 Southern latitude degree, possibly negative for the southern hemisphere, larger than -90 but always lower than **/mermap/supply/north**. Used for map types **boundaries** and **areafit**.
- /mermap/supply/west**=*<setup west longitude>* (no default, initially 11)
 Western longitude degree, possibly negative for the western hemisphere, possibly shifted periodically, but always lower than **/mermap/supply/east**. Used for map types **boundaries** and **areafit**.
- /mermap/supply/east**=*<setup east longitude>* (no default, initially 13)
 Eastern longitude degree, possibly negative for the western hemisphere, possibly shifted periodically, but always larger than **/mermap/supply/west**. Used for map types **boundaries** and **areafit**.
- /mermap/supply/area**=*<comma separated list of named positions>* (no default)
 Sets **/mermap/supply/north**, **/mermap/supply/south**, **/mermap/supply/west**, **/mermap/supply/east** according to the given *<comma separated list of named positions>*, i.e. the described area contains all these positions. Note that you need at least two points inside the list. Also note to take special care, if the international dateline is on your resulting map, see Section 10.2 on page 80. Used for map types **boundaries** and **areafit**.
- /mermap/supply/add area**=*<comma separated list of named positions>* (no default)
 Nearly identical to **/mermap/supply/area**, but the given *<comma separated list of named positions>* does not reset the current area, i.e. the positions are added to the current area which possibly grows to fit all positions. Used for map types **boundaries** and **areafit**.
- /mermap/supply/area to reference** (no value, initially unset)
 The map settings **/mermap/supply/north**, **/mermap/supply/south**, **/mermap/supply/west**, **/mermap/supply/east** are taken to compute the map center. This center position is saved to **/mermap/supply/latitude** and **/mermap/supply/longitude**. Used for map type **reference**.
- /mermap/supply/latitude**=*<setup latitude>* (no default, initially 49)
 Latitude degree of a reference point, possibly negative for the southern hemisphere. Used for map type **reference**.
- /mermap/supply/longitude**=*<setup longitude>* (no default, initially 12)
 Longitude degree of a reference point, possibly negative for the western hemisphere. Used for map type **reference**.
- /mermap/supply/position**=*<setup latitude>*:*<setup longitude>* (no default, initially 49:12)
 Latitude degree and longitude of a reference point. Used for map type **reference**.
- /mermap/supply/named position**=*<name>* (style, no default)
 The *named position* given by *<name>* describes a reference point, see Section 3.5 on page 22. Used for map type **reference**.

- `/mermap/supply/width=<setup width in tiles>` (no default, initially 4)
Width of the map as multiplicity of map tiles. Used for map types `reference` and `areafit`.
- `/mermap/supply/tex width=<width>` (style, no default)
Width of the map as \TeX dimension. This is a style to compute `/mermap/supply/width` according to the current `/mermap/tile size`^{→ P. 51}.
- `/mermap/supply/height=<setup height in tiles>` (no default, initially 4)
Height of the map as multiplicity of map tiles. Used for map types `reference` and `areafit`.
- `/mermap/supply/tex height=<width>` (style, no default)
Height of the map as \TeX dimension. This is a style to compute `/mermap/supply/height` according to the current `/mermap/tile size`^{→ P. 51}.
- `/mermap/supply/align=<setup alignment>` (no default, initially `center`)
Alignment of reference point or area for map types `reference` and `areafit`. Feasible values are `northwest`, `north`, `northeast`, `west`, `center`, `east`, `southwest`, `south`, `southeast`.
- `/mermap/supply/target=<setup target>` (no default, initially `tiles`)
Defines the type of output for the Python 3 script. Feasible values are:
- `none`: No tiles are downloaded and no merged map is generated, just map computation. This is the fastest method and needs no tile supplier.
 - `tiles`: Download map tiles from a tile map service (TMS) `/mermap/supply/url`^{→ P. 32}. Compilation of a document with map tile takes longer than compilation with a merged map and transparency should not be used with tiles, but the resulting document is smaller than a document with merged maps.
 - `mergedmap`: Download map tiles from a tile map service (TMS) `/mermap/supply/url`^{→ P. 32} and merge them into a single map picture. This speeds compilation and allows transparency effects, but the resulting document is possibly larger than a document with map tiles, because map tiles often are optimized 8-bit image files while the merged image is a 24-bit PNG file. Additionally, synergy effects of using the same map tiles for different maps are lost. Also, since the pixel map is clipped to full pixels, the resulting map may differ (shift/size) from the more accurate tile representation by one pixel.
 - `wmsmap`: Download a single map from a web map service (WMS) `/mermap/supply/url`^{→ P. 32}. Internally, the package treats a WMS like a tile map service including all tile calculations. Actually, a single file is downloaded.

/mermap/supply/url=*<setup URL>* (no default, initially empty)

Here, the url format with placeholder {z}{x}{y} for map tile download is defined. **Be sure that you have the permission to download, save, and use the map tiles from that URL. Illegal downloads are not endorsed in any way.**

```
url={https://abc.efg.hij/{z}/{x}/{y}.png?apikey=12345678},
```

See Section 4.5 on page 36 for predefined URLs.

/mermap/supply/url with api key=*<{prefix}>**<{name}>**<{postfix}>* (no default)

This is an alternative version of **/mermap/supply/url**. The URL is constructed from some fixed *<prefix>* and *<postfix>* with an API key in between. The API key is retrieved by *<name>* from a repository filled by **\mrcsetapikey**.

```
url={https://abc.efg.hij/{z}/{x}/{y}.png?apikey={myservice}{},
```

See Section 4.5 on page 36 for predefined URLs.

\mrcsetapikey*<{name}>**<{value}>*

Stores an API key *<value>* for access with the given *<name>*. Typically, *<value>* is a received ID from a map tile service provider after personal registration. *<name>* is a placeholder which is used inside **/mermap/supply/url with api key** to mark the insertion point for the API key.

```
\mrcsetapikey{myservice}{....K942XY....}
```

/mermap/supply/attribution=*<attribution text>* (no default, initially empty)

Attribution text for the map source. Typically, it acknowledges the copyright of the map data provider. It may contain hyperlinks. It is used to set up **/mermap/mapdef/attribution**^{→ P.19} afterwards and it is accessible as **\mrcmapattribution** (use read-only).

For technical reasons, do not use ". **\mrcumlaut** may be used for masking umlauts, e.g. use **\mrcumlaut{u}** instead of **\"{u}**", but umlauts can also be used directly, e.g. as UTF-8 coded characters.

/mermap/supply/attribution print=*<attribution text>* (no default, initially empty)

Attribution text for the map source. In contrast to **/mermap/supply/attribution** it is intended for media that does not support hyperlinks like printed posters, books, etc. It is used to set up **/mermap/mapdef/attribution print**^{→ P.19} afterwards and it is accessible as **\mrcmapattributionprint** (use read-only).

/mermap/supply/basename=*<setup tile base name>* (no default, initially **tiles/tile**)

Prefix for local tile files, e.g. 'tiles/map' for 'tiles/map_10_10_10.png'.

`/mermap/supply/flex reference scale=<scale denominator>` (no default)


With the given $\langle scale denominator \rangle$, an appropriate `/mermap/supply/zoom`^{→ P.30} and `/mermap/tile size`^{→ P.51} is computed. Note that the $\langle scale denominator \rangle$ always applies to the current `/mermap/supply/latitude`^{→ P.30} and is used for map type **boundaries** and **reference**. For example, if the reference point is on the north side of the map, also the $\langle scale denominator \rangle$ applies to the most northern latitude.

Note to take special care to the order of the options.

- The reference point has to be set *before* `/mermap/supply/flex reference scale`, e.g. by `/mermap/supply/latitude`^{→ P.30}, `/mermap/supply/position`^{→ P.30}, `/mermap/supply/named position`^{→ P.30}.
- `/mermap/supply/tex height`^{→ P.31}, `/mermap/supply/tex width`^{→ P.31} (only for map type **reference**) have to be set *after* `/mermap/supply/flex reference scale`, because the `/mermap/tile size`^{→ P.51} is adapted.

Also see `/mermap/flex tile size`^{→ P.51}, `/mermap/flex zoom`^{→ P.51}, and `/mermap/flex scale`^{→ P.52}.

```
\begin{tikzpicture}
  \mrcmap[type=reference,latitude=48.14,longitude=11.57,
    flex reference scale=250000,
    source=opentopomap,
    tex width=\linewidth,tex height=5cm]{}
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcclipmap
  \path[draw] (mrcmap.south west) rectangle (mrcmap.north east);
  \node[below left=2mm,align=right,fill=white,fill opacity=0.5,
    text opacity=1] at (mrcmap.north east) {scale \mrcprettymapscale};
\end{tikzpicture}
```

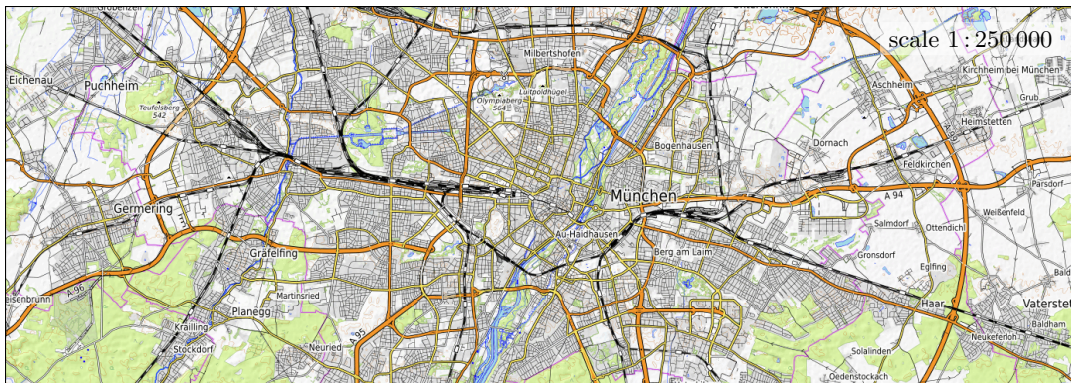

Kartendaten: © OpenStreetMap Mitwirkende, SRTM | Kartendarstellung: © OpenTopoMap (CC-BY-SA)

`/mermap/supply/flex area scale=<scale denominator>` (no default)

This is a shortcut for setting `/mermap/supply/area to reference`^{→ P.30} and `/mermap/supply/flex reference scale=<scale denominator>`. Used for map type **boundaries** and **reference**.


Note to take special care to the order of the options.

- The reference point has to be set *before* `/mermap/supply/flex area scale`.
- `/mermap/supply/tex height`^{→ P.31}, `/mermap/supply/tex width`^{→ P.31} (only for map type **reference**) have to be set *after* `/mermap/supply/flex reference scale`.

`/mermap/supply/area fit=<size>` (default 0pt)

This key can be used for map type `areafit` as *final* option *after* all other options. It applies a fine tuning to `/mermap/tile size`^{→ P. 51}, `/mermap/supply/width`^{→ P. 31}, and `/mermap/supply/height`^{→ P. 31} such that the defined area fits exactly into the map region. If a `<size>` is specified, width and height are reduced for the calculation by this `<size>`, e.g. `<size>=1cm` ensures a border of 5mm on each side. Also see `/mermap/flex tile size`^{→ P. 51} and `/mermap/flex zoom`^{→ P. 51}.

```
\begin{tikzpicture}
\mrcNPdef{munich}{48.14}{11.58}
\mrcNPdef{rio}{-22.91}{-43.20}
\mrcNPdef{newyork}{40.71}{-74.01}
\mrcmap[ type = areafit, area = {munich,rio,newyork},
source=topplusopen web grau,
tex width=\linewidth, tex height=7cm,
flex area fit=1cm ]{}
\mrcdrawmap
\node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
{\mrcmapattribution};
\draw[yellow] ([xshift=5mm,yshift=5mm]mrcmap.south west) rectangle
([xshift=-5mm,yshift=-5mm]mrcmap.north east);
\draw[red,fill=red!50!gray!50!white,fill opacity=0.25]
(\mrcNpcs{newyork}) -- (\mrcNpcs{rio}) -- (\mrcNpcs{munich}) -- cycle;
\end{tikzpicture}
```

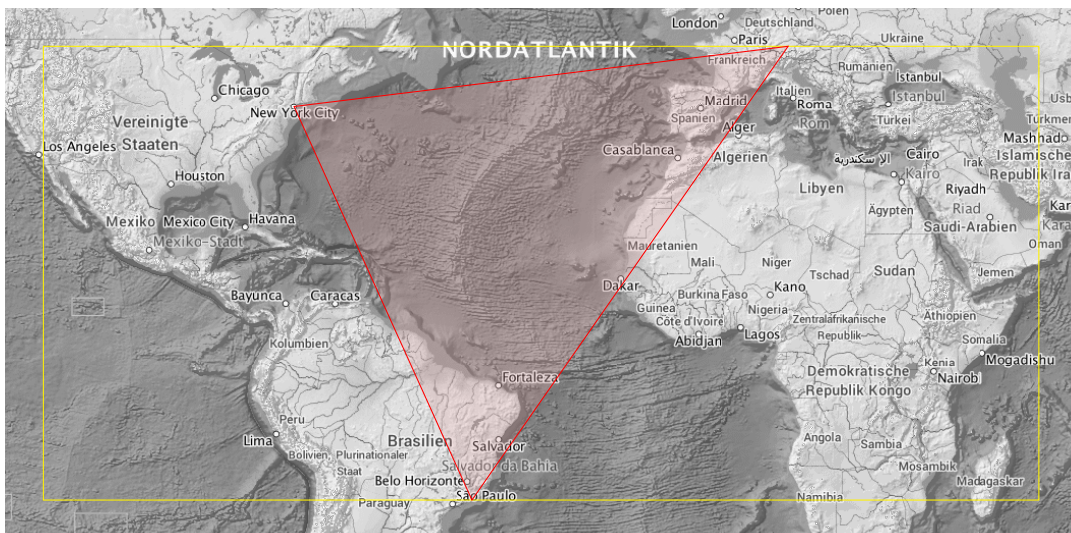

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

`/mermap/supply/pixel=<setup pixel size>` (no default, initially 256)

Pixel width (and height) of a tile. It is especially needed for target `mergedmap` and also `wmsmap`. For `wmsmap`, it is multiplied with a pseudo tile calculation to compute the actual picture size to download.

`/mermap/supply/dpi=<dpi value>` (style, no default)

This style sets `/mermap/supply/pixel` such that the given `<dpi value>` is resulting (approximately).

- Note that this only applies for WMS Servers and not for TMS (Tile Map Service) Servers, because there `/mermap/supply/pixel` is a fixed number depending on Server settings and cannot be chosen arbitrarily.
- A high `<dpi value>` results in large downloaded map files. If the server does not provide a high resolution map, you will get unnecessary large files with blurred content.
- The `<dpi value>` for TMS data can be changed by adapting `/mermap/tile size`^{→ P. 51} or `/mermap/flex tile size`^{→ P. 51}.

```
\begin{tikzpicture}
  \mrcmap[type=reference,latitude=48.14,longitude=11.57,
    flex reference scale=250000,
    source=topplusopen p250, target=wmsmap, dpi=300,
    tex width=\linewidth, tex height=5cm]{dpi_value}
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcclipmap
  \path[draw] (mrcmap.south west) rectangle (mrcmap.north east);
\end{tikzpicture}
```



© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

4.4 Map Apply

`\mrcapplymap{<definition>}`

A map which is supplied by `\mrccsupplymap`^{→ P. 29} is applied inside a `tikzpicture` environment by `\mrcapplymap` where `<definition>` identifies the map. `\mrcapplymap` replaces a manual setup by `\mrcdefinemap`^{→ P. 18}. The same map can be applied more than once inside a document. Note that applying a map does not mean to draw the map, but to prepare everything for drawing.

`\mrcmap[<options>]{<definition>}`

This is a combination of `\mrccsupplymap`^{→ P. 29} with the given `<options>` followed immediately by `\mrcapplymap`. If `<definition>` is left empty, an automated unique identifier is inserted. If a map is to be used just once, `\mrcmap` may be preferred.

4.5 Map Tile Server

To use map tiles with this package you obviously need access to a map tile server. Thanks to all the many contributors to [OpenStreetMap](#), map data is free for everyone to use. **But, map tile servers based on OpenStreetMap are not necessarily free.**

A list of online raster tile servers based on OpenStreetMap data is found here:

https://wiki.openstreetmap.org/wiki/Tile_servers

- I do not run a map tile server.
- I do not and cannot grant any permission to access a map tile server.
- I do not and cannot grant any permission to use map tiles in private, academic, free, or commercial publications.
- All operators of map tile servers require to mention an attribution for their maps.

The following option allows easy usage of very few selected tile servers. The tile server of [OpenStreetMap](#) is not included because of its [Tile Usage Policy](#). I am aware that the following list could be enlarged much more, but I do not want to add more to avoid any legal uncertainties.

- I will remove an entry immediately, if the tile server operator asks for it.
- If **YOU** operate a tile server and you want an entry here, I would be glad to add it to the following list.

`/mermap/supply/source=<source>` (style, no default)

This style sets `/mermap/supply/url` ^{→ P. 32}, `/mermap/supply/attribution` ^{→ P. 32}, `/mermap/supply/attribution print` ^{→ P. 32} and `/mermap/supply/basename` ^{→ P. 32}.

Feasible values for `<source>` are:

- **dummy:**

Dummy tile server at loopback 127.0.0.1 for test purposes.

- **opentopomap:**

Tile server (TMS) of OpenTopoMap.

– Usage (German language): <https://opentopomap.org/about#verwendung>

– Required attribution (`\mrcmapattribution`):

Kartendaten: © OpenStreetMap Mitwirkende, SRTM | Kartendarstellung:
© OpenTopoMap (CC-BY-SA)

– Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Kartendaten: © www.openstreetmap.org/copyright, SRTM | Kartendarstellung:
© opentopomap.org (CC-BY-SA)



Kartendaten: © OpenStreetMap Mitwirkende, SRTM | Kartendarstellung: © OpenTopoMap (CC-BY-SA)

- **openrouteservice mapsurfer:**

Tile server of OpenRouteService.

A registered `<api-key>` is needed (free plan available) which is applied by

`\mrcsetapikey` → P. 32 `{openrouteservice}{<api-key>}`.

Usage: <https://openrouteservice.org/terms-of-service/>


API documentation: <https://openrouteservice.org/dev/#/api-docs>

- Required attribution (`\mrcmapattribution`):

Service © openrouteservice.org | Map data © OpenStreetMap contributors

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Service © openrouteservice.org | Map data © OpenStreetMap contributors

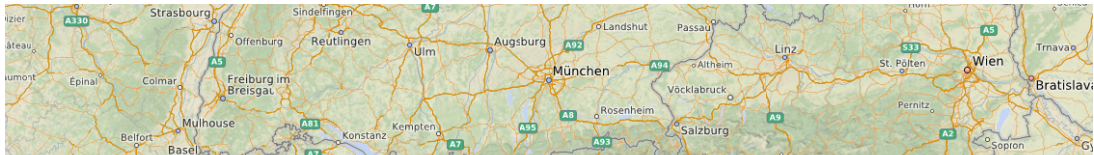

Service © openrouteservice.org | Map data © OpenStreetMap contributors

- **stamen terrain:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#terrain>

- Required attribution (`\mrcmapattribution`):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen terrain-background:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#terrain-background>

- Required attribution (`\mrcmapattribution`):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen terrain-labels:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#terrain-labels>

- Required attribution (**\mrcmapattribution**):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen terrain-lines:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#terrain-lines>

- Required attribution (**\mrcmapattribution**):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen toner:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#toner>

- Required attribution (**\mrcmapattribution**):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen toner-lite:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#toner-lite>

- Required attribution (**\mrcmapattribution**):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen toner-hybrid:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#toner-hybrid>

- Required attribution (**\mrcmapattribution**):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen toner-background:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#toner-background>

- Required attribution (**\mrcmapattribution**):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen toner-labels:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#toner-labels>

- Required attribution (**\mrcmapattribution**):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen toner-lines:**

Tile server of Stamen Design.

Usage: <http://maps.stamen.com/#toner-lines>

- Required attribution (**\mrcmapattribution**):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under ODbL (www.openstreetmap.org/copyright).



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

- **stamen watercolor:**

Tile server of Stamen Design.


Usage: <http://maps.stamen.com/#watercolor>

- Required attribution (**\mrcmapattribution**):

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under CC BY SA.

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

Map tiles by Stamen Design (stamen.com), under CC BY 3.0. Data by OpenStreetMap, under CC BY SA.

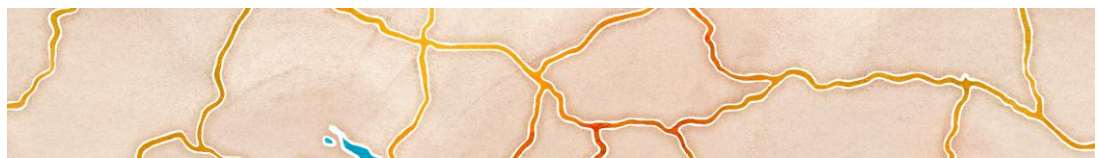

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under CC BY SA.

- **thunderforest opencyclemap:**

Tile server of Thunderforest.

A registered *<api-key>* is needed (free plan available) which is applied by

`\mrcsetapikey` ^{→ P. 32} `{thunderforest}{<api-key>}`.

- Usage: <https://www.thunderforest.com/terms>
- API documentation: <https://www.thunderforest.com/maps/opencyclemap>
- Required attribution (`\mrcmapattribution`):

Maps © Thunderforest, Data © OpenStreetMap contributors

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Maps © www.thunderforest.com, Data © www.osm.org/copyright



Maps © Thunderforest, Data © OpenStreetMap contributors

- **thunderforest transport:**

Tile server of Thunderforest.

A registered *<api-key>* is needed (free plan available) which is applied by

`\mrcsetapikey` ^{→ P. 32} `{thunderforest}{<api-key>}`.

- Usage: <https://www.thunderforest.com/terms>
- API documentation: <https://www.thunderforest.com/maps/transport>
- Required attribution (`\mrcmapattribution`):

Maps © Thunderforest, Data © OpenStreetMap contributors

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Maps © www.thunderforest.com, Data © www.osm.org/copyright



Maps © Thunderforest, Data © OpenStreetMap contributors

- **thunderforest landscape:**

Tile server of Thunderforest.

A registered *<api-key>* is needed (free plan available) which is applied by


`\mrcsetapikey` ^{→ P. 32} `{thunderforest}{<api-key>}`.

- Usage: <https://www.thunderforest.com/terms>
- API documentation: <https://www.thunderforest.com/maps/landscape>
- Required attribution (`\mrcmapattribution`):

Maps © Thunderforest, Data © OpenStreetMap contributors

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Maps © www.thunderforest.com, Data © www.osm.org/copyright

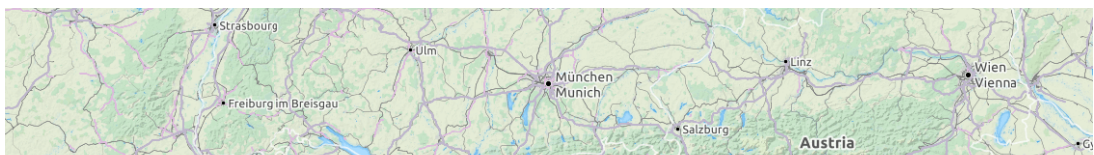

Maps © Thunderforest, Data © OpenStreetMap contributors

- **thunderforest outdoors:**

Tile server of Thunderforest.

A registered $\langle api-key \rangle$ is needed (free plan available) which is applied by

$\backslash mrcsetapikey \rightarrow P.32 \{thunderforest\} \{ \langle api-key \rangle \}$.

- Usage: <https://www.thunderforest.com/terms>
- API documentation: <https://www.thunderforest.com/maps/outdoors>
- Required attribution ($\backslash mrcmapattribution$):

Maps © Thunderforest, Data © OpenStreetMap contributors

- Required attribution for media without hyperlinks ($\backslash mrcmapattributionprint$):

Maps © www.thunderforest.com, Data © www.osm.org/copyright



Maps © Thunderforest, Data © OpenStreetMap contributors

- **thunderforest transport-dark:**

Tile server of Thunderforest.

A registered $\langle api-key \rangle$ is needed (free plan available) which is applied by


$\backslash mrcsetapikey \rightarrow P.32 \{thunderforest\} \{ \langle api-key \rangle \}$.

- Usage: <https://www.thunderforest.com/terms>
- API documentation: <https://www.thunderforest.com/maps/transport-dark>
- Required attribution ($\backslash mrcmapattribution$):

Maps © Thunderforest, Data © OpenStreetMap contributors

- Required attribution for media without hyperlinks ($\backslash mrcmapattributionprint$):

Maps © www.thunderforest.com, Data © www.osm.org/copyright

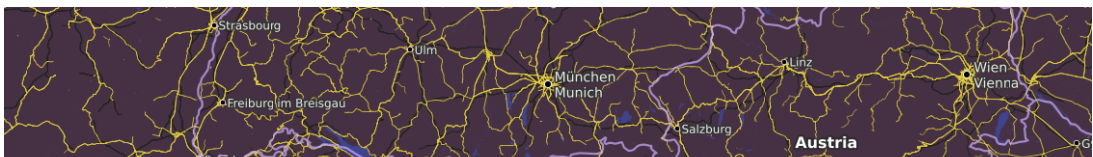

Maps © Thunderforest, Data © OpenStreetMap contributors

- **thunderforest spinal-map:**

Tile server of Thunderforest.

A registered $\langle api-key \rangle$ is needed (free plan available) which is applied by


$\backslash mrcsetapikey \rightarrow P.32 \{thunderforest\} \{ \langle api-key \rangle \}$.

- Usage: <https://www.thunderforest.com/terms>
- API documentation: <https://www.thunderforest.com/maps/spinal-map>
- Required attribution ($\backslash mrcmapattribution$):

Maps © Thunderforest, Data © OpenStreetMap contributors

- Required attribution for media without hyperlinks ($\backslash mrcmapattributionprint$):

Maps © www.thunderforest.com, Data © www.osm.org/copyright

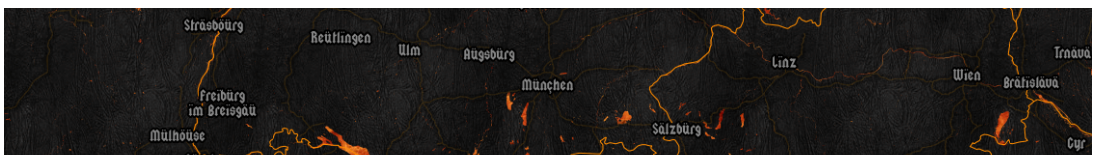

Maps © Thunderforest, Data © OpenStreetMap contributors

- **thunderforest pioneer:**

Tile server of Thunderforest.

A registered $\langle api-key \rangle$ is needed (free plan available) which is applied by

`\mrcsetapikey` \rightarrow P. 32 `{thunderforest}{\langle api-key \rangle}`.

- Usage: <https://www.thunderforest.com/terms>
- API documentation: <https://www.thunderforest.com/maps/pioneer>
- Required attribution (`\mrcmapattribution`):

Maps © Thunderforest, Data © OpenStreetMap contributors

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Maps © www.thunderforest.com, Data © www.osm.org/copyright



Maps © Thunderforest, Data © OpenStreetMap contributors

- **thunderforest mobile-atlas:**

Tile server of Thunderforest.

A registered $\langle api-key \rangle$ is needed (free plan available) which is applied by

`\mrcsetapikey` \rightarrow P. 32 `{thunderforest}{\langle api-key \rangle}`.

- Usage: <https://www.thunderforest.com/terms>
- API documentation: <https://www.thunderforest.com/maps/mobile-atlas>
- Required attribution (`\mrcmapattribution`):

Maps © Thunderforest, Data © OpenStreetMap contributors

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Maps © www.thunderforest.com, Data © www.osm.org/copyright



Maps © Thunderforest, Data © OpenStreetMap contributors

- **thunderforest neighbourhood:**

Tile server of Thunderforest.

A registered $\langle api-key \rangle$ is needed (free plan available) which is applied by

`\mrcsetapikey` \rightarrow P. 32 `{thunderforest}{\langle api-key \rangle}`.

- Usage: <https://www.thunderforest.com/terms>
- API documentation: <https://www.thunderforest.com/maps/neighbourhood>
- Required attribution (`\mrcmapattribution`):

Maps © Thunderforest, Data © OpenStreetMap contributors

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

Maps © www.thunderforest.com, Data © www.osm.org/copyright



Maps © Thunderforest, Data © OpenStreetMap contributors

- **topplusopen web:**

Tile server (TMS) of Bundesamt für Kartographie und Geodäsie.


- Covers world / Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:

http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

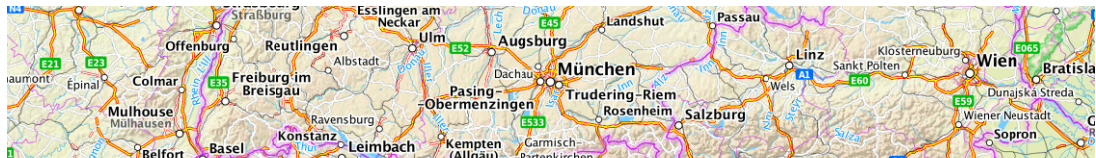

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen web grau:**

Tile server (TMS) of Bundesamt für Kartographie und Geodäsie.

- Covers world / Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:

http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf



© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

The following sources are Web map server (WMS). Therefore, `/mermap/supply/target→P.31` can only be set to `wmsmap` or `none`.

- **topplusopen p5:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:5000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (`\mrcmapattribution`):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

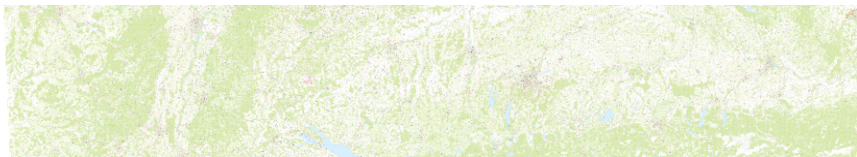

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p5 grau:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:5000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (`\mrcmapattribution`):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

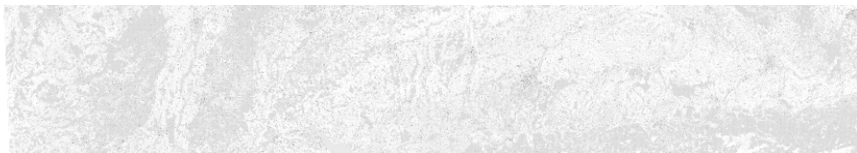

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p10:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:10000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (`\mrcmapattribution`):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (`\mrcmapattributionprint`):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

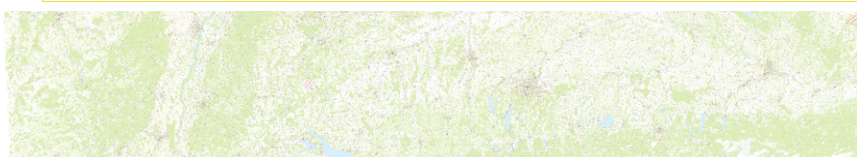

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p10 grau:**

Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:10000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf



© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p17.5:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:17500, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

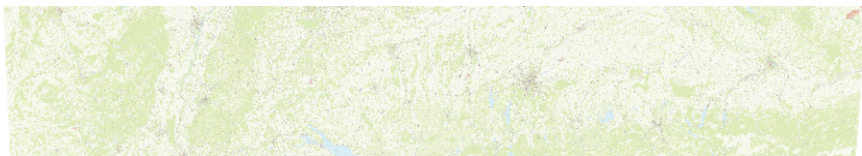

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p17.5 grau:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:17500, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

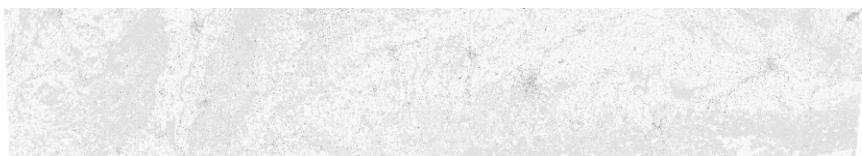

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p25:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:25000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

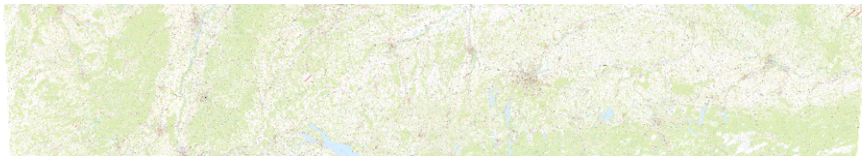

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p25 grau:**

Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:25000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf



© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p50:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:50000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

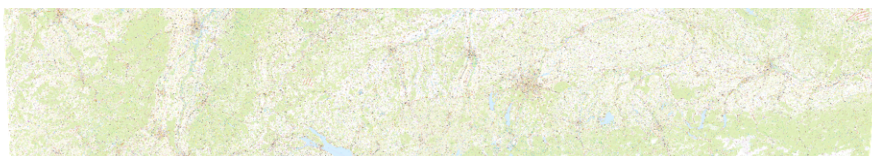

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p50 grau:**

Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:50000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf



© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p100:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:100000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

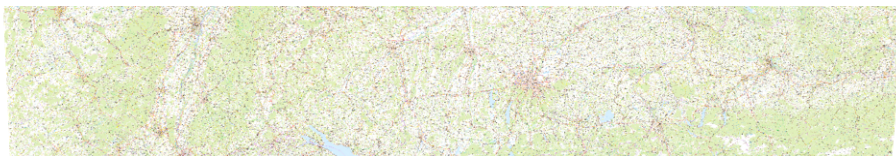

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p100 grau:**

Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:100000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf



© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p250:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:250000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

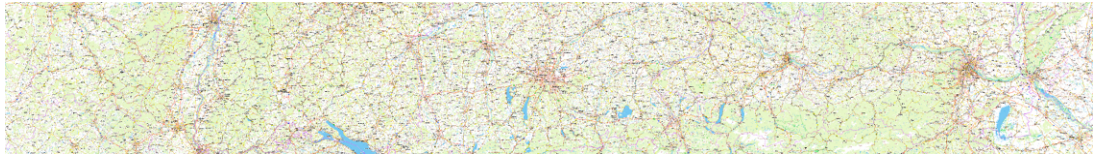

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- **topplusopen p250 grau:**


Web map server (WMS) of Bundesamt für Kartographie und Geodäsie.

- 1:250000, covers Europe / Germany depending on zoom level
- Usage (German language): <https://gdz.bkg.bund.de/index.php/default/webdienste/topplus-produkte/wmts-topplusopen-wmts-topplus-open.html>
- Required attribution (**\mrcmapattribution**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

- Required attribution for media without hyperlinks (**\mrcmapattributionprint**):

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen:
http://sg.geodatenzentrum.de/web_public/Datenquellen_TopPlus_Open.pdf

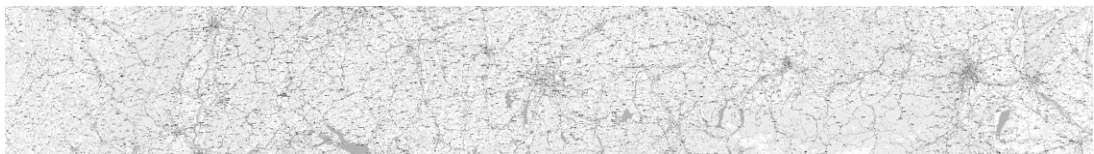

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

\mrcnewsupplysource{<source>}{<options>}

Adds a new <source> value to /mermap/supply/source^{→P.36}. The <options> should set the keys /mermap/supply/url^{→P.32}, /mermap/supply/attribution^{→P.32}, /mermap/supply/attribution print^{→P.32} and /mermap/supply/basename^{→P.32}. It is recommend to use x ... for <source> to avoid conflicts with future official additions to /mermap/supply/source^{→P.36}.

```
\mrcnewsupplysource{x example}
{
  url          = http://127.0.0.1/dummy/{z}/{x}/{y}.png,
  attribution   = {Dummy tile server},
  attribution print = {Dummy tile server},
  basename     = tiles/dummy,
}
```

5 Map Drawing

5.1 Principal Drawing

`\mrcdrawmap`[*<options>*]

Inside a `tikzpicture` environment, `\mrcdrawmap` draws a map prepared by `\mrcdefinemap`^{→P.18}, `\mrcapplymap`^{→P.35}, or `\mrcmap`^{→P.35}. All *<options>* share the common prefix `/mermap/`. This is the principal macro to draw a prepared map respectively the background of the map. The background consists of downloaded map tiles or just a color rectangle.

`/mermap/draw`=*<tile draw>* (no default, initially `auto`)

- **auto**: Draws the map according to `/mermap/mapdef/resource`^{→P.19}, i.e. downloaded maps or tiles are used, if available.
- **path**: Draws the map according to the style given by `/mermap/map path`. Existing map tiles or merged maps are ignored
- **tiles**: Draws the map with downloaded map tiles, if available.
- **mergedmap**: Draws the map with a merged picture, if available.
- **wmsmap**: Draws the map with a downloaded WMS picture, if available.

`/mermap/map path`=*<options>* (no default, initially `upper left=green!50, upper right=green!25, lower left=green!50!black!50, lower right=green!25`)

Defines a TikZ style for drawing the map without tiles. *<options>* are feasible TikZ path options.

`/mermap/map clip`=*<code>* (no default, initially `\mrccclipmap`)

Clipping options for the map. By default, the defined map is clipped with the full map rectangle. Use this option only, if you not want to clip the map to its specified size. *<code>* is some TikZ clipping code.

`/mermap/map scope`=*<options>* (no default, initially empty)

`\mrcdrawmap` uses a `scope` environment inside which takes the given TikZ *<options>*.

`\mrccclipmap`

Clips all subsequent drawings against the applied map.
This is a shortcut macro identical to

```
\path[clip] (mrcmap.south west) rectangle (mrcmap.north east);
```

`\mrcboundmap`

Sets the picture bounding box according to the applied map.
This is a shortcut macro identical to

```
\path[use as bounding box]  
(mrcmap.south west) rectangle (mrcmap.north east);
```

5.2 Flexible Tile Size

Typically, the pixel size of a map tile is fixed and a map tile is a pixel graphics file. The actual size of such an included picture inside the document is freely selectable. Note that a very small `/mermap/tile size` results in very small map lettering, while a very large `/mermap/tile size` results in very blurred images.

The general idea of a *flexible* tile size is to specify an aspired tile size called `/mermap/flex tile size` and to give L^AT_EX the freedom to select `/mermap/tile size` in *about the same size* as `/mermap/flex tile size`. This freedom is used to achieve a *pseudo zoom* called `/mermap/flex zoom` which is a nearly arbitrary rational number instead of `/mermap/supply/zoom`^{→P.30} which is a natural number.

This *pseudo zoom* is applied by several options which share *flex* in their names, e.g. `/mermap/flex scale`^{→P.52}, `/mermap/named flex scale`^{→P.52}, `/mermap/supply/flex reference scale`^{→P.33}, `/mermap/supply/flex area scale`^{→P.33}, `/mermap/supply/flex area fit`^{→P.34}.

`/mermap/tile size`= $\langle length \rangle$ (no default, initially 32.512mm)

Width and height of a drawn tile picture are set to $\langle length \rangle$. For standard tiles with 256 times 256 pixels a tile size of 32.512mm = 1.28in results in an approximate 200 dpi output for the document. For a **beamer** document, consider to use a `/mermap/tile size` of 21.333333mm to get approximate 1:1 pixel input and output (depending on **beamer** settings and used hardware). Also see `/mermap/mapdef/tile size`^{→P.19}.

`/mermap/flex tile size`= $\langle length \rangle$ (no default, initially 32.512mm)

Aspired width and height of a tile picture are set to $\langle length \rangle$. This value is used while applying `/mermap/flex zoom`.

`/mermap/flex zoom`= $\langle pseudo zoom \rangle$ (style, no default)

This style sets `/mermap/supply/zoom`^{→P.30} and `/mermap/tile size` in combination.

- If $\langle pseudo zoom \rangle$ is a natural number, `/mermap/supply/zoom`^{→P.30} is set to $\langle pseudo zoom \rangle$ and `/mermap/tile size` is set to `/mermap/flex tile size`.
- Otherwise, `/mermap/supply/zoom`^{→P.30} is set to the natural number closest to $\langle pseudo zoom \rangle$ and `/mermap/tile size` is such enlarged or reduced that the $\langle pseudo zoom \rangle$ value is simulated, i.e. the *impression* of a rational zoom factor is given.

Note that `/mermap/flex zoom` has to be used *before* `\mrcsupplymap`^{→P.29} or `\mrcmap`^{→P.35}, because the zoom setup is adapted.

`/mermap/flex scale=<scale denominator>:<latitude>` (style, no default)

For different latitude scopes, an identical zoom factor produces maps of different scale. With `/mermap/flex scale`, a `/mermap/flex zoom`^{P.51} is computed to achieve the given `<scale denominator>` at a given `<latitude>`. Note that this only applies to the center of a map. If the produced map is not centered at `<latitude>`, the produced scale may differ from the intended one. Also see `/mermap/supply/flex reference scale`^{P.33}.

```
\begin{tikzpicture}
  \mermapset{flex scale=250000:48.14}
  \mrcmap[type=reference,latitude=48.14,longitude=11.57,
    source=opentopomap,
    tex width=\linewidth,tex height=5cm]{}
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcclipmap
  \path[draw] (mrcmap.south west) rectangle (mrcmap.north east);
  \node[below left=2mm, align=right, fill=white, fill opacity=0.5,
    text opacity=1]
    at (mrcmap.north east) {scale \mrcprettymapscale};
\end{tikzpicture}
```



`/mermap/named flex scale=<scale denominator>:<name>` (style, no default)

Identical to `/mermap/flex scale`, but used the *named position* `<name>` to provide a *latitude*, see Section 3.5 on page 22.

```
\mrcNPdef{munich}{48.137222}{11.575556}
\mermapset{named flex scale=250000:munich} % identical to the following
\mermapset{flex scale=250000:\mrcNplat{munich}}
```

```
\mrcdrawnetwork[<options>]
```

Note that oversized maps are not supported, i.e. maps which are wider than 360° in longitude. Here, meridians are expected to be missing or misplaced.

[illegible]

```
/mermap/network pieces=number (no default, initially 8)
```

```
/mermap/network distance= $\langle mesh\ width \rangle$  (no default, initially 2cm)
```


`/mermap/network font= $\langle text \rangle$` (no default, initially `\fontsize{4pt}{4pt}\sffamily`)
 $\langle text \rangle$ is some font setting for the latitude and longitude display.

5.4 Graphical Debug Overlay

`\mrcdrawinfo`

Draws some map information overlay for debugging purposes only.

```
\begin{tikzpicture}
  \mrcNPdef{munich}{48.137222}{11.575556}
  \mrcmap[type=reference, named position=munich, source=opentopomap,
    flex reference scale=50000,
    tex width=\linewidth, tex height=10cm]{}
  \mrcdrawmap
  \node[below, font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattrtribution};
  \mrcclipmap
  \mrcdrawinfo
\end{tikzpicture}
```

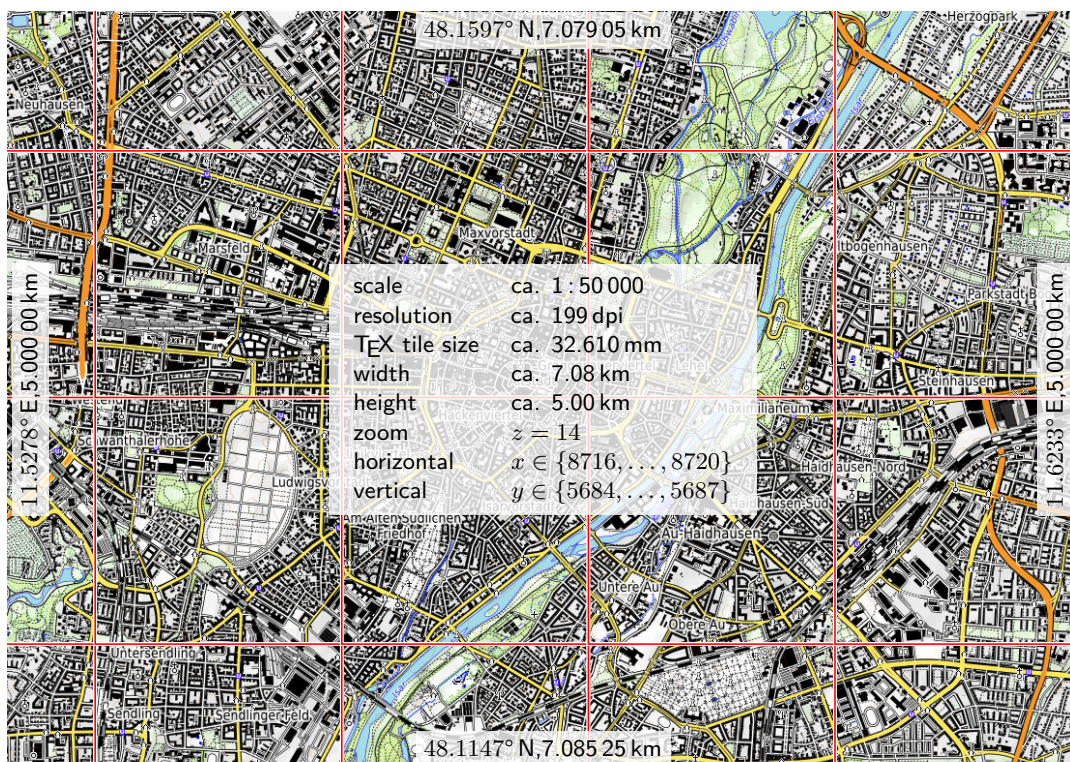

6 Scales and Sizes

Inside a defined map several size values and scaling options are available. Please note that due to the nature of the Mercator projection and several simplifying assumptions all specifications for map scale, map width, map height, etc. are imprecise in the best case and even misleading in the worst case. They are suited for representative diagrams, but not for critical navigation purposes etc.

6.1 Map Sizes and Document Sizes

`\mrctexwidth`

TeX length denoting the document width of the current map.

`\mrctexheight`

TeX length denoting the document height of the current map.

`\mrccscale`

Scaling factor between map and real world. A TeX length given in pt, but stripped from that unit, multiplied by `\mrccscale` corresponds to a real world length given in kilometers. Note that this is *not* the map scale. Actually, it is reciprocal proportional to the map scale and proportional to the map scale denominator, see `\mrcmapscaleddenominator`.

`\mrctextokm{<length>}`

Computes a given TeX `<length>` (with unit) into the corresponding real world length in kilometers (without unit).

```
Map width: \mrctextokm{\mrctexwidth}\,km
```

`\mrctextomile{<length>}`

Computes a given TeX `<length>` (with unit) into the corresponding real world length in miles (without unit).

```
Map width: \mrctextomile{\mrctexwidth}\,mi
```

`\mrckmtotex{<number>}`

Computes real world length `<number>` in kilometers (without unit) to a TeX length (with unit).

```
% draw a circle with radius 20km
\draw (mrnpos) circle (\mrckmtotex{20});
```

`\mrcmiletotex{<number>}`

Computes real world length `<number>` in miles (without unit) to a TeX length (with unit).

```
% draw a circle with radius 20 miles
\draw (mrnpos) circle (\mrcmiletotex{20});
```

`\mrcmapscaleddenominator`

Approximate map scale denominator. 1cm on the map corresponds approximately to `\mrcmapscaleddenominator`·1cm in the real world. Do not confuse with `\mrccscale`.

```
Map scale: 1:\mrcmapscaleddenominator
```

6.2 Pretty Size Output

`\mrcprettymapscale`

Approximate map scale given with three valid digits with a representation like 1:1000.

Map scale: `\mrcprettymapscale`

`\mrcprettymapwidth`

Approximate map width in kilometers (or meters) with three valid digits:

Map width: `\mrcprettymapwidth`

To create a pretty printing to your own liking, you can do like the following:

```
\newcommand{\myprettymapwidth}{\SI[round-mode=figures,round-precision=3]{%  
  {\mrctextokm{\mrctexwidth}}}{km}}
```

`\mrcprettymapheight`

Approximate map height in kilometers (or meters) with three valid digits:

Map height: `\mrcprettymapheight`

`\mrcprettymapresolution`

Approximate map resolution in dpi (dots per inch):

Map resolution: `\mrcprettymapresolution`

`\mrcprettytilesize`

Approximate tile size inside the document (TeX size) in millimeters:

`\TeX` tile size: `\mrcprettytilesize`

```

\begin{tikzpicture}
\mrcNPdef{rome}{41.89300}{12.48557}
\mermapset{named flex scale=2000000:rome}
\mrcmap[type=reference, named position=rome, source=topplusopen web,
tex width=\linewidth, tex height=10cm]{scales_example}
\mrcdrawmap
\node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
{\mrcmapattribution};
\mrcclipmap
\path[draw] (\mrcNPcs{rome}) circle (\mrckmtotex{50});
\node[above] at ([yshift=\mrckmtotex{50}]\mrcNPcs{rome}) {\SI{50}{km}};
\node[above right,fill=white,fill opacity=0.5,text opacity=1,align=center,
line width=0pt, inner sep=2mm]
at (mrcmap.south west) { \begin{tabular}{rl}
scale: & & \mrcprettymapscale\\
map width: & & \mrcprettymapwidth\\
map height: & & \mrcprettymapheight\\
\TeX\ tile size: & & \mrcprettytilesiz\\
resolution: & & \mrcprettymapresolution\\
\end{tabular}}
\begin{tikzpicture}
\mrcdrawscalebar[width-in-km=100]
\path[every node/.style={above,inner sep=0.5mm,font=\sffamily\tiny}]
(mrcscalebar.north west) -- (mrcscalebar.north east)
node[pos=0]{0} node[pos=0.2]{20} node[pos=0.4]{40} node[pos=0.6]{60}
node[pos=0.8]{80} node[pos=1]{100} node[pos=1,right,yshift=-1mm]{km};
\end{tikzpicture}
};
\end{tikzpicture}

```




© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

6.3 Scale Bars

`\mrcdrawscalebar` [*options*]


Draws a scale bar according to the given *options*. All *options* share the common prefix `/mermap/scalebar/`. The most essential option is the *width* of the scale bar.

```
\begin{tikzpicture}
  \mrcNPdef{munich}{48.137222}{11.575556}
  \mrcNPdef{vienna}{48.208333}{16.373056}
  \mrcmap[tex width=\linewidth, tex height=4cm, target=none,
    type=areafit, area={munich,vienna}, flex area fit=2cm]{ }
  \mrcdrawmap
  \mrcmarker{named position=munich, contents={M\unchar"un}}
  \mrcmarker{named position=vienna, contents={Wien}}
  \mrcdrawscalebar[width-in-km=100, solid,
    at={([xshift=-10mm,yshift=5mm]mrcmap.south east)},
    placement={above left}, ]
\end{tikzpicture}
```

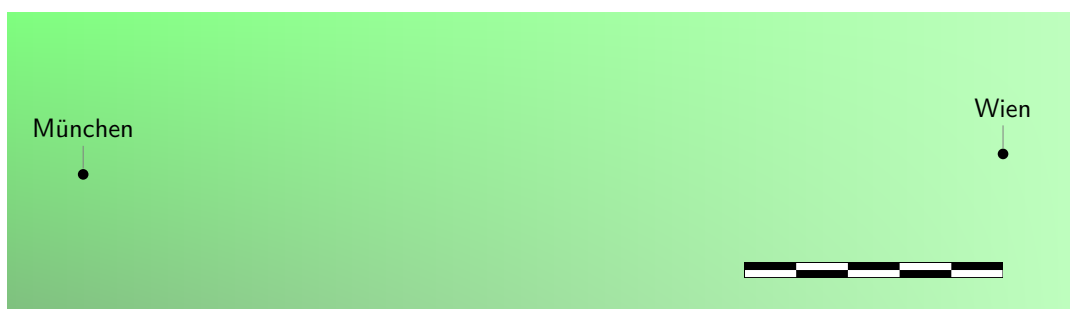


The size, position, and appearance of the scale bar can be customized by setting the various *options*. The shape of the scale bar is denoted by a TikZ node `mrcscalebar` which can be used for lettering.

```
\begin{tikzpicture}
  \mrcNPdef{munich}{48.137222}{11.575556}
  \mrcNPdef{vienna}{48.208333}{16.373056}
  \mrcmap[tex width=\linewidth, tex height=4cm, target=none,
    type=areafit, area={munich,vienna}, flex area fit=2cm]{ }
  \mrcdrawmap
  \mrcmarker{named position=munich, contents={M\unchar"un}}
  \mrcmarker{named position=vienna, contents={Wien}}
  \mrcdrawscalebar[width-in-km=100,solid,south-west-inside=10mm;3mm ]
  \path[every node/.style={above,inner sep=0.5mm,font=\sffamily\tiny}]
    (mrcscalebar.north west) -- (mrcscalebar.north east)
    node[pos=0]{0} node[pos=0.2]{20} node[pos=0.4]{40} node[pos=0.6]{60}
    node[pos=0.8]{80} node[pos=1]{100} node[pos=1,right,yshift=-1mm]{km};
\end{tikzpicture}
```

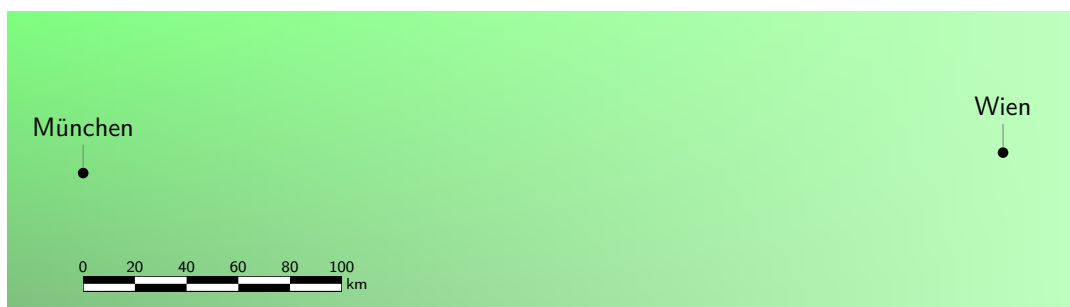

- `/mermap/scalebar/width-in-km=<number>` (no default, initially 0)
Sets the width of the scale bar to match the real word length *<number>* in kilometers.
- `/mermap/scalebar/width-in-kilometer=<number>` (no default, initially 0)
Alias for `/mermap/scalebar/width-in-km`
- `/mermap/scalebar/width-in-meter=<number>` (no default, initially 0)
Sets the width of the scale bar to match the real word length *<number>* in meters.
- `/mermap/scalebar/width-in-mile=<number>` (no default, initially 0)
Sets the width of the scale bar to match the real word length *<number>* in miles.
- `/mermap/scalebar/width-in-yard=<number>` (no default, initially 0)
Sets the width of the scale bar to match the real word length *<number>* in yards.
- `/mermap/scalebar/partitions=<number>` (no default, initially 5)
Determines the *<number>* of partitions for the scale bar. If *<number>* is set to 1, there is no partitioning.
- `/mermap/scalebar/height=<length>` (no default, initially 2mm)
Sets the height of the scale bar to the given TeX *<length>*.
- `/mermap/scalebar/at={<TikZ coordinate>}` (no default, initially {(0,0)})
The scale bar is positioned at the given *<TikZ coordinate>*. The placement is done with the `/mermap/scalebar/placement`^{→ P.60} option. Both option correspond to the TikZ options for positioning nodes. The scale bar can be positioned outside the map (e.g. below), but remember to use `\mrcclipmap`^{→ P.50} after the scale bar in this case, if needed.

```
\begin{tikzpicture}
  \mrcNPdef{munich}{48.137222}{11.575556}
  \mrcNPdef{vienna}{48.208333}{16.373056}
  \mrcmap[tex width=\linewidth, tex height=4cm, target=none,
    type=areafit, area={munich,vienna}, flex area fit=2cm]{}
  \mrcdrawmap
  \mrcmarker{named position=munich, contents={M\unchar"un}}
  \mrcmarker{named position=vienna, contents={Wien}}
  \mrcdrawscalebar[width-in-km=200, partitions=8,
    at={([xshift=5mm,yshift=-2mm]mrcmap.south west)},
    placement=below right ]
  \path[every node/.style={below,inner sep=0.5mm,font=\sffamily\tiny}]
    (mrcscalebar.south west) -- (mrcscalebar.south east)
    node[pos=0]{0} node[pos=0.25]{50} node[pos=0.5]{100} node[pos=0.75]{150}
    node[pos=1]{200} node[pos=1,right,yshift=1mm]{km};
\end{tikzpicture}
```

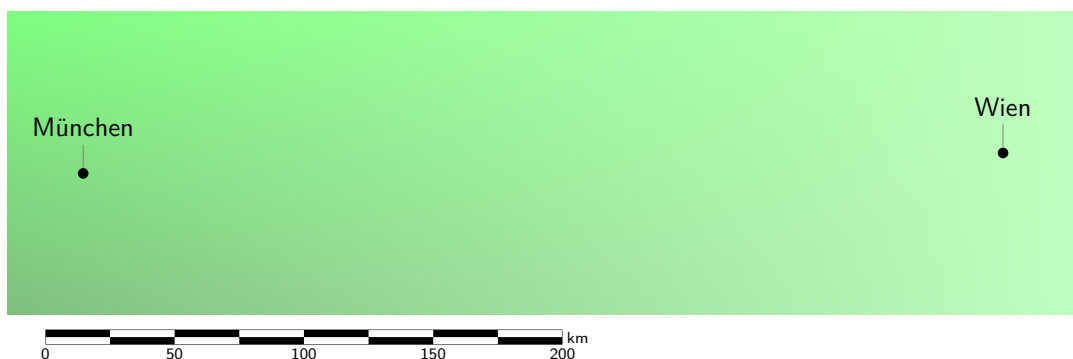

`/mermap/scalebar/placement=<TikZ positioning>` (no default, initially empty)
 <TikZ positioning> of a scale bar in combination with `/mermap/scalebar/at`^{P.59}. All TikZ placement options for nodes can be used, e.g. `above left` or `anchor=mid west`, etc. Actually, *any* node option could be applied here, but the intended use is for placement options only.

`/mermap/scalebar/south-east-inside=<x shift>;<y shift>` (default `0pt;0pt`, initially unset)
 Shortcut for placing the scale bar at the south east corner of the map. The optional <x shift> and <y shift> denote the absolute shift values in each direction, i.e. the algebraic sign is automatically complemented. If only <x shift> is given, then <y shift> is set to the same value. `/mermap/scalebar/at`^{P.59} and `/mermap/scalebar/placement` are set by this option.

`/mermap/scalebar/south-east-outside=<x shift>;<y shift>` (default `0pt;0pt`, initially unset)
 Shortcut for placing the scale bar below the south east corner of the map.

`/mermap/scalebar/south-west-inside=<x shift>;<y shift>` (default `0pt;0pt`, initially unset)
 Shortcut for placing the scale bar at the south west corner of the map.

`/mermap/scalebar/south-west-outside=<x shift>;<y shift>` (default `0pt;0pt`, initially unset)
 Shortcut for placing the scale bar below the south west corner of the map.

`/mermap/scalebar/north-west-inside=<x shift>;<y shift>` (default `0pt;0pt`, initially unset)
 Shortcut for placing the scale bar at the north west corner of the map.

`/mermap/scalebar/north-west-outside=<x shift>;<y shift>` (default `0pt;0pt`, initially unset)
 Shortcut for placing the scale bar above the north west corner of the map.

`/mermap/scalebar/north-east-inside=<x shift>;<y shift>` (default `0pt;0pt`, initially unset)
 Shortcut for placing the scale bar at the north east corner of the map.

`/mermap/scalebar/north-east-outside=<x shift>;<y shift>` (default `0pt;0pt`, initially unset)
 Shortcut for placing the scale bar above the north east corner of the map.

`/mermap/scalebar/major style={<TikZ options>}` (no default, initially empty)
 The *major* part of the scale bar is a single TikZ path object which can be customized by the given <TikZ options>. The *major* part consists of the black area in the default case.

```
\begin{tikzpicture}
  \mrcdrawscalebar[scale=2000000, width-in-km=100,
    major style={left color=red,right color=blue} ]
\end{tikzpicture}
```



`/mermap/scalebar/minor style={<TikZ options>}` (no default, initially empty)
 The *minor* part of the scale bar is a single TikZ path object which can be customized by the given <TikZ options>. The *minor* part is seen as holes in the default case. `/mermap/scalebar/minor style` has only an effect, if the minor part is drawn `/mermap/scalebar/solid`^{P.61}.

```
\begin{tikzpicture}
  \mrcdrawscalebar[scale=2000000, width-in-km=100, solid,
    minor style={yellow} ]
\end{tikzpicture}
```



`/mermap/scalebar/double=true|false` (default `true`, initially `true`)

If set to `true`, the scale bar is drawn as a double ruler.

`/mermap/scalebar/single=true|false` (default `true`, initially `false`)

If set to `true`, the scale bar is drawn as a single ruler. `/mermap/scalebar/single` is inverse to `/mermap/scalebar/double`.

```
\begin{tikzpicture}
  \mrcdrawscalebar[scale=2000000, width-in-km=100, single, height=1mm]
\end{tikzpicture}
```



`/mermap/scalebar/transparent=true|false` (default `true`, initially `true`)

If set to `true`, the *minor* part of the scale bar is drawn transparent, i.e. as holes inside the ruler.

`/mermap/scalebar/solid=true|false` (default `true`, initially `false`)

If set to `true`, the *minor* part of the scale bar is drawn opaque. It is drawn white or according to `/mermap/scalebar/minor style`^{P.60}. `/mermap/scalebar/solid` is inverse to `/mermap/scalebar/transparent`.

`/mermap/scalebar/scale=<scale denominator>` (no default, initially unset)

Sets or overwrites the `<scale denominator>` setting. **Using this key is not needed and may even lead to erroneous displays inside a `tikzpicture` with a defined map setting.** This key is helpful, if a scale bar is used without a defined map.

7 Markers


As described before, a map can be amended by arbitrary TikZ code using map coordinates. For highlighting places or adding markers, the `\mrcmarker` macro may be helpful which provides some predefined marker types.

7.1 Marker Settings

`\mrcmarker{<options>}`

Places a marker according to the given *<options>* on the map. All *<options>* share the common prefix `/mermap/marker/`. Different `/mermap/marker/type`^{P.65} settings are available which are more or less customizable.

```
% \mrcsetapikey{thunderforest}{YOUR-API-KEY} % registered key
\begin{tikzpicture}
  \mrcmap[type=reference, position=48.15:11.6,
    flex reference scale=500 000,
    source=thunderforest neighbourhood,
    tex width=\linewidth, tex height=4cm]{}
  \mrcdrawmap
  \node[below, font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcdrawnetwork
  \mrcclipmap
  \mermapsetmarker{draw=red, fill=red!20!white, font=\sffamily\footnotesize}
  \mrcmarker{type=classic, position=48.15:11.2, contents={A}, radius=0.5mm}
  \mrcmarker{type=pin, position=48.15:11.3, contents={B}}
  \mrcmarker{type=pinflip, position=48.15:11.4, contents={C}}
  \mrcmarker{type=drop, position=48.15:11.5, contents={D}}
  \mrcmarker{type=knob, position=48.15:11.6, contents={E}}
  \mrcmarker{type=pictodropring, position=48.15:11.7, contents={F}}
  \mrcmarker{type=pictoknobring, position=48.15:11.8, contents={G}}
  \mrcmarker{type=ringx, position=48.15:11.9, contents={H}}
  \mrcmarker{type=markx, position=48.15:12, contents={I}}
\end{tikzpicture}
```

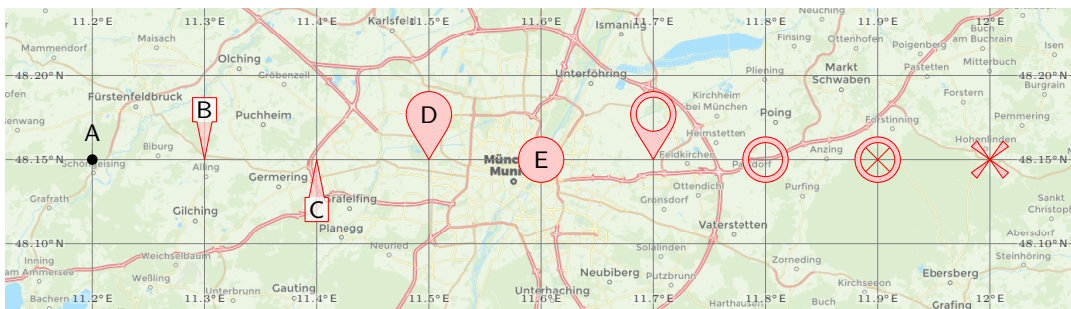

`\mermapsetmarker{<options>}`

Sets *<options>* for all following markers inside the current TeX group. All options share the common prefix `/mermap/marker/`, e.g. for setting `/mermap/marker/type`^{P.65} use

```
\mermapsetmarker{type=pin}
```

Also see `\mermapset`^{P.17} and `\mermapsetsupply`^{P.29}.

/mermap/marker/first options= $\langle options \rangle$ (no default, initially unset)
The given list of $\langle options \rangle$ is used inside every `\mrcmarker`^{→P.62} before the options of `\mrcmarker`^{→P.62}.

/mermap/marker/last options= $\langle options \rangle$ (no default, initially unset)
The given list of $\langle options \rangle$ is used inside every `\mrcmarker`^{→P.62} after the options of `\mrcmarker`^{→P.62}.

/mermap/marker/latitude= $\langle latitude \rangle$ (no default, initially 12)
Latitude degree of the place marker. It is accessible as `\mrcmarkerlatitude` (use read-only).

/mermap/marker/lat= $\langle latitude \rangle$ (no default, initially 12)
Alias for `/mermap/marker/latitude`.

/mermap/marker/longitude= $\langle longitude \rangle$ (no default, initially 49)
Longitude degree of the place marker. It is accessible as `\mrcmarkerlongitude` (use read-only).

/mermap/marker/lon= $\langle longitude \rangle$ (no default, initially 49)
Alias for `/mermap/marker/longitude`.

/mermap/marker/position= $\langle place\ latitude \rangle : \langle place\ longitude \rangle$ (no default, initially 12:49)
Sets the latitude degree and the longitude degree of the place marker.

/mermap/marker/named position= $\langle name \rangle$ (style, no default)
Sets the latitude degree and the longitude degree of the place marker to the *named position* denoted by $\langle name \rangle$, see Section 3.5 on page 22.

/mermap/marker/use inside= $\langle area \rangle$ (no default, initially map)
The place marker is used or ignored according to its belonging inside the given $\langle area \rangle$. Feasible values for $\langle area \rangle$ are:

- **map**: Use inside map.
- **vicinity**: Use inside map plus vicinity, see `/mermap/vicinity`^{→P.23}.

/mermap/marker/contents= $\langle text \rangle$ (no default, initially empty)
Sets $\langle text \rangle$ for displaying inside the marker, if the marker type supports such a thing. It is accessible as `\mrcmarkercontents` (use read-only).

/mermap/marker/pictocontents= $\langle code \rangle$ (no default, initially empty)
Sets TikZ $\langle code \rangle$ for displaying inside the marker, if the marker type supports such a thing. It is accessible as `\mrcmarkerpictocontents` (use read-only).

/mermap/marker/alias= $\langle text \rangle$ (no default, initially noname)
The position of the marker is available as TikZ coordinate by the given $\langle text \rangle$, e.g. to draw to or from the marker.

/mermap/marker/uuid= $\langle uuid \rangle$ (no default, initially empty)
Sets a $\langle uuid \rangle$ for unique identification of markers. It is accessible as `\mrcmarkeruuid` (use read-only). The $\langle uuid \rangle$ is provided for user applications.

/mermap/marker/category= $\langle category \rangle$ (no default, initially empty)
Sets a $\langle category \rangle$ to group markers. It is accessible as `\mrcmarkercategory` (use read-only).

`/mermap/marker/show=true|false` (default `true`, initially `true`)

If set to `true`, the marker is shown, if it lies inside the map (or vicinity). Otherwise, the place marker is not used.

`/mermap/marker/hide=true|false` (default `true`, initially `false`)

If set to `true`, the marker is not used. `/mermap/marker/hide` is inverse to `/mermap/marker/show`.

`/mermap/marker/show category=<category>` (style, no default)

Sets `/mermap/marker/show` to `true`, if `/mermap/marker/category`^{→P.63} equals `<category>`. Otherwise, nothing happens. `/mermap/marker/category`^{→P.63} has to be set *before*.

`/mermap/marker/show all but category=<category>` (style, no default)

Sets `/mermap/marker/show` to `true`, if `/mermap/marker/category`^{→P.63} does not equal `<category>`. Otherwise, nothing happens. `/mermap/marker/category`^{→P.63} has to be set *before*.


`/mermap/marker/hide category=<category>` (style, no default)

Sets `/mermap/marker/show` to `false`, if `/mermap/marker/category`^{→P.63} equals `<category>`. Otherwise, nothing happens. `/mermap/marker/category`^{→P.63} has to be set *before*.

`/mermap/marker/hide all but category=<category>` (style, no default)

Sets `/mermap/marker/show` to `false`, if `/mermap/marker/category`^{→P.63} does not equal `<category>`. Otherwise, nothing happens. `/mermap/marker/category`^{→P.63} has to be set *before*.

```
\begin{tikzpicture}
  \mrcmap[teX width=4cm, teX height=4cm,
    latitude=48.14, longitude=11.57, target=none]{}
  \mrcdrawmap[draw=path]
  \mermapsetmarker{last options={hide all but category=A}}
  \mrcmarker{type=knob,position=48.00:11.43,fill=blue,category=A}
  \mrcmarker{type=knob,position=48.28:11.43,fill=red,category=B}
  \mrcmarker{type=knob,position=48.00:11.71,fill=blue,category=A}
  \mrcmarker{type=knob,position=48.28:11.71,fill=red,category=B}
\end{tikzpicture}
```

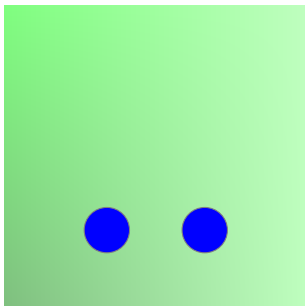


7.2 Marker Types

`/mermap/marker/type=<type>` (no default, initially `classic`)

Decides about the basic shape and style of the marker. Feasible values for `<type>` are listed in the following. More values can be defined by `\mrcnewmarkertype`^{→ P. 71}.

- `classic`:

```
\begin{tikzpicture}
\mrcmap[tex width=8cm, tex height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=classic}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=classic, text=blue, font=\sffamily\footnotesize}
\mrcmarker{position=48.14:11.57, contents={M\unchen}, angle=-30}
\end{tikzpicture}
```

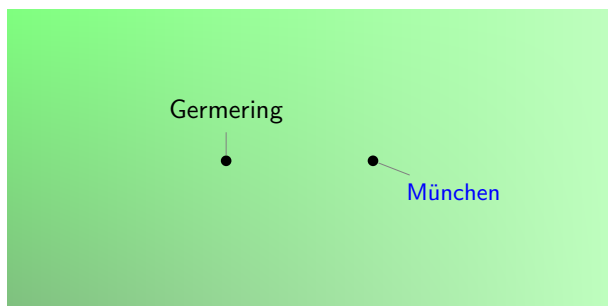

- `pin`:

```
\begin{tikzpicture}
\mrcmap[tex width=8cm, tex height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=pin}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=pin, draw=blue, fill=blue!20!white,
font=\sffamily\footnotesize}
\mrcmarker{position=48.14:11.57, contents={M\unchen}, alias={munich}}
\end{tikzpicture}
```




- **pinflip:**

```
\begin{tikzpicture}
\mrcmap[teX width=8cm, teX height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=pinflip}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=pinflip, draw=red, fill=red!20!white,
font=\sffamily\footnotesize}
\mrcmarker{position=48.14:11.57, contents={M\"unchen}, shift=4mm}
\end{tikzpicture}
```




- **drop:**

```
\begin{tikzpicture}
\mrcmap[teX width=8cm, teX height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=drop}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=drop, fill=blue, draw=blue!20!white, text=white,
font=\sffamily\small\bfseries,
path style={line join=round, thin, draw=mrcmarkerfill,
double=mrcmarkerdraw,double distance=0.6pt} }
\mrcmarker{position=48.14:11.57, contents={M}, alias={munich}}
\end{tikzpicture}
```

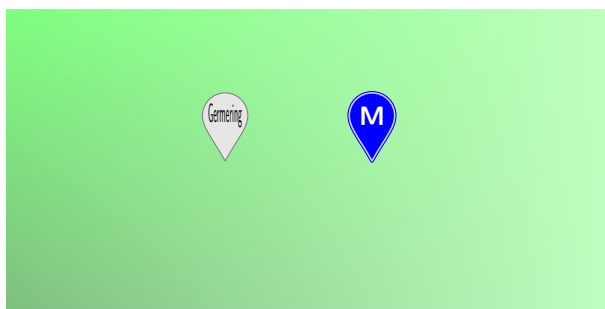


- **pictodrop:**

```
\begin{tikzpicture}
\mrcmap[teX width=8cm, teX height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=pictodrop, pictocontents={
\draw[fill=red!70!gray,draw=white]
(-0.2,-0.2)--(0.2,-0.2)--(0.2,0.1)--(0,0.2)--(-0.2,0.1) -- cycle;
}}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=pictodrop,
fill=blue!75!gray!30, draw=blue,
radius=4mm, shift=-1mm}
\mrcmarker{position=48.14:11.57,
pictocontents={
\node {\includegraphics[width=6mm]{alertmessage-warning.png}};
}}
\end{tikzpicture}
```

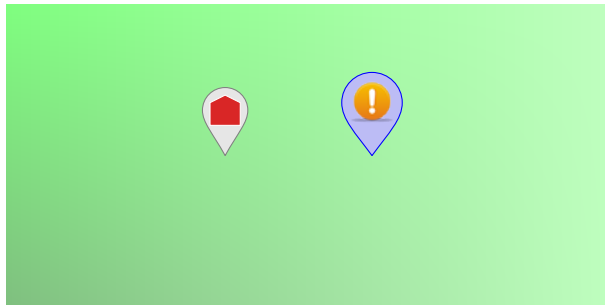


- **pictodropring:**

```
\begin{tikzpicture}
\mrcmap[teX width=8cm, teX height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=pictodropring}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=pictodropring,
fill=red!50!gray, draw=red!75!white,
shift=-1mm}
\mrcmarker{position=48.14:11.57}
\end{tikzpicture}
```

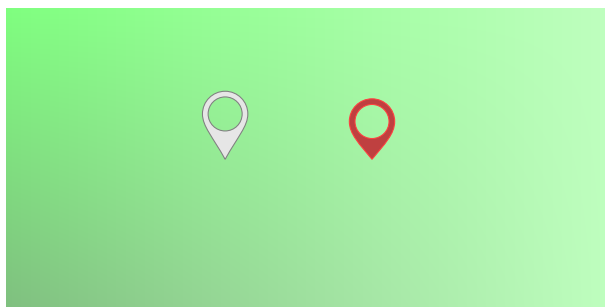


- **knob:**

```
\begin{tikzpicture}
\mrcmap[tex width=8cm, tex height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=knob}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=knob, radius=2mm,
fill=blue, draw=blue!20!white,
text=white, path style={draw=mrcmarkerfill, double=mrcmarkerdraw,
double distance=0.6pt} }
\mrcmarker{position=48.14:11.57, contents={M}}
\end{tikzpicture}
```

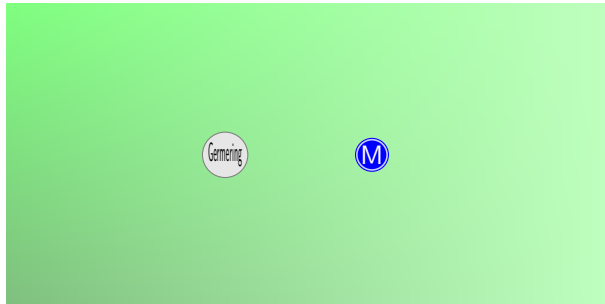


- **pictoknob:**

```
\begin{tikzpicture}
\mrcmap[tex width=8cm, tex height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=pictoknob}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=pictoknob, radius=2mm,
fill=blue, draw=blue!20!white,
path style={draw=mrcmarkerfill, double=mrcmarkerdraw,
double distance=0.6pt} }
\mrcmarker{position=48.14:11.57, alias={munich}}
\end{tikzpicture}
```

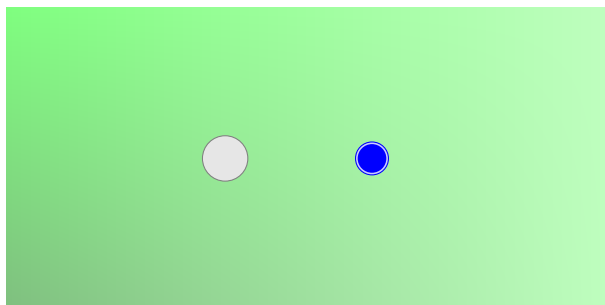


- **pictoknobring:**

```
\begin{tikzpicture}
\mrcmap[tex width=8cm, tex height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=pictoknobring}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=pictoknobring, radius=2mm, inner radius=1mm,
draw=blue, fill=blue!20!white,
pictocontents={\node[above] at (0,\mrcmarkerradius)
{\mrcmarkercontents}};}}
}
\mrcmarker{position=48.14:11.57, contents={M\"unchen}}
\end{tikzpicture}
```

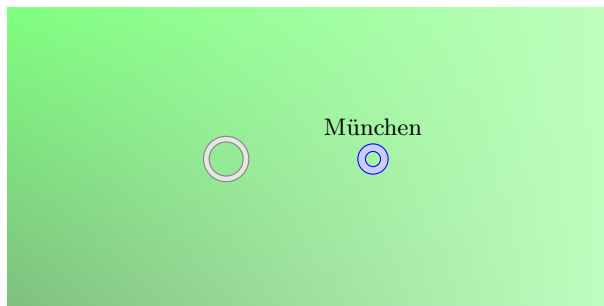


- **ringx:**

```
\begin{tikzpicture}
\mrcmap[tex width=8cm, tex height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=ringx}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=ringx, radius=4mm, inner radius=3mm,
draw=red, fill=red!50!white,
path style={draw=mrcmarkerdraw, very thin, double=white,
double distance=0.6pt}}
}
\mrcmarker{position=48.14:11.57, alias={munich}}
\end{tikzpicture}
```

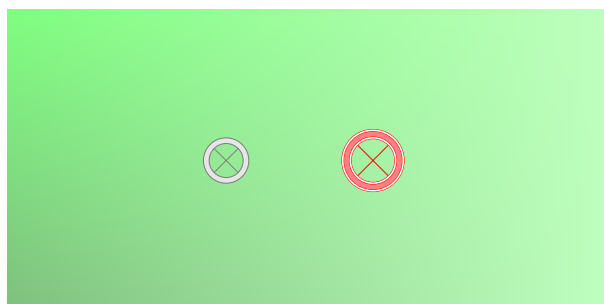

- `markx`:

```
\begin{tikzpicture}
\mrcmap[tex width=8cm, tex height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mermapsetmarker{type=markx}
\mrcmarker{position=48.14:11.36, contents={Germering}}
\mermapsetmarker{type=markx, radius=4mm, inner radius=3mm,
draw=red, fill=red!50!white, path style={very thin}
}
\mrcmarker{position=48.14:11.57, alias={munich}}
\end{tikzpicture}
```

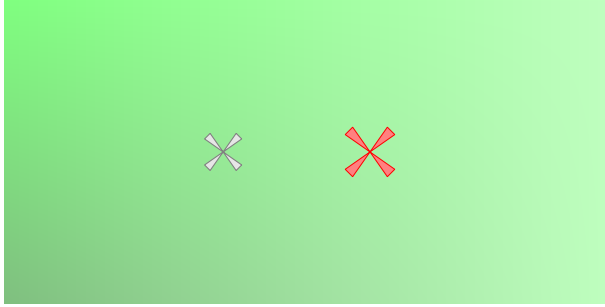

The different marker types can be customized by some additional options:

`/mermap/marker/font=` (no default, initially `\sffamily\small`)
 Font of the marker text (`classic`, `pin`, `pinflip`, `drop`, `knob`). It is accessible as `\mrcmarkerfont` (use read-only).

`/mermap/marker/text=<color>` (no default, initially `black`)
 Color of the marker text (`classic`, `pin`, `pinflip`, `drop`, `knob`). It is accessible as `mrcmarkertext` (use read-only).

`/mermap/marker/draw=<color>` (no default, initially `gray`)
 Color of the marker frame (`pin`, `pinflip`, `drop`, `pictodrop`, `pictodropring`, `knob`, `pictoknob`, `pictoknobring`, `ringx`, `markx`). It is accessible as `mrcmarkerdraw` (use read-only).

`/mermap/marker/fill=<color>` (no default, initially `gray!20`)
 Color of the marker interior (`pin`, `pinflip`, `drop`, `pictodrop`, `pictodropring`, `knob`, `pictoknob`, `pictoknobring`, `ringx`, `markx`). It is accessible as `mrcmarkerfill` (use read-only).

`/mermap/marker/angle=<angle>` (no default, initially `90`)
 Angle of the marker (`classic`). It is accessible as `\mrcmarkerangle` (use read-only).

`/mermap/marker/shift=<length>` (no default, initially `0pt`)
 Shift of the marker text (`pin`, `pinflip`). It also shifts the drop center (`drop`, `pictodrop`, `pictodropring`). It is accessible as `\mrcmarkershift` (use read-only).

`/mermap/marker/radius=<length>` (no default, initially `3mm`)
 Radius of the marker (`classic`, `drop`, `pictodrop`, `pictodropring`, `knob`, `pictoknob`, `pictoknobring`, `ringx`, `markx`). It is accessible as `\mrcmarkerradius` (use read-only).

`/mermap/marker/inner radius=<length>` (no default, initially `2.25mm`)
 Inner radius of the marker (`pictodropring`, `pictoknobring`, `ringx`). It is accessible as `\mrcmarkerinnerradius` (use read-only).

`/mermap/marker/path style={\langle options \rangle}` (no default, initially empty)
TikZ $\langle options \rangle$ which are added to (some) path elements of of the marker (`pin`, `pinflip`, `drop`, `pictodrop`, `pictodropring`, `knob`, `pictoknob`, `pictoknobring`, `ringx`, `markx`). It is accessible as TikZ option `mrcpathstyle` (use read-only).


`/mermap/marker/node style={\langle options \rangle}` (no default, initially empty)
TikZ $\langle options \rangle$ which are added to the node element of of the marker (`classic`, `pin`, `pinflip`, `drop`, `knob`). It is accessible as TikZ option `mrcnodestyle` (use read-only).

7.3 New Marker Types

`\mrcnewmarkertype{\langle type name \rangle}{\langle TikZ code \rangle}`

Creates a new `/mermap/marker/type`^{→ P.65} value $\langle type name \rangle$ using the given $\langle TikZ code \rangle$ for drawing a place marker. To avoid future name clashes, you should start a private $\langle type name \rangle$ with letter x. For $\langle TikZ code \rangle$ settings like `\mrcmarkercontents`, `\mrcmarkerfont`, or `mrcmarkerfill` may be used or ignored.

```
\mrcnewmarkertype{xmark}{
  \path[draw=mrcmarkerdraw,thick] circle (\mrcmarkerradius);
  \path[draw=mrcmarkerdraw,thick]
    (45:2*\mrcmarkerradius)--(225:2*\mrcmarkerradius)
    (135:2*\mrcmarkerradius)--(315:2*\mrcmarkerradius);
}
\begin{tikzpicture}
\mrcmap[teX width=4cm, teX height=4cm,
  latitude=48.14, longitude=11.57, target=none]{}
\mrcdrawmap[draw=path]
\mrcmarker{type=xmark,
  position=48.14:11.57,alias={munich},
  draw=red}
\end{tikzpicture}
```

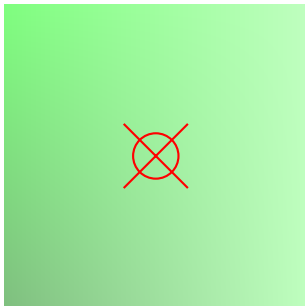


7.4 New Marker Styles

`\mrcnewmarkerstyle``{⟨style name⟩}{⟨options⟩}`

Creates a new `/mermap/marker/style` value `⟨style name⟩` using the given `⟨options⟩` for drawing a place marker. All `⟨options⟩` share the common prefix `/mermap/marker/`. Here, a *style* has the same concept as a TikZ style.

```
\begin{tikzpicture}
\mrcmap[tex width=8cm, tex height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mrcnewmarkerstyle{one}{type=pin, draw=blue, fill=blue!20!white,
font=\sffamily\footnotesize}
\mrcnewmarkerstyle{two}{type=pinflip, draw=red, fill=red!20!white,
font=\sffamily\footnotesize}
\mrcmarker{style=one, position=48.14:11.36, contents={Germering}}
\mrcmarker{style=two, position=48.14:11.57, contents={M\"unchen}}
\end{tikzpicture}
```

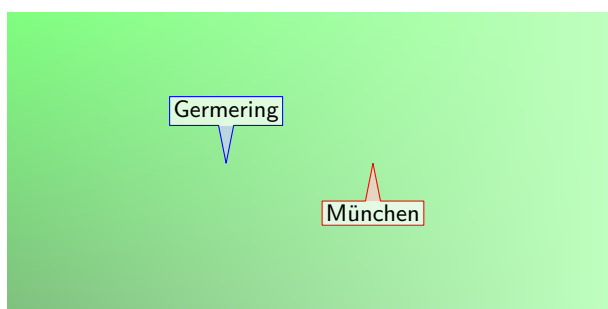

A *style* can have one parameter, but note the small difference in applying this parameter compared to TikZ:

```
\begin{tikzpicture}
\mrcmap[tex width=8cm, tex height=4cm, zoom=10,
latitude=48.14, longitude=11.48, target=none]{}
\mrcdrawmap[draw=path]
\mrcnewmarkerstyle{color}{type=pin, draw=#1, fill=#1!20!white,
font=\sffamily\footnotesize}
\mrcmarker{style/color=blue, position=48.14:11.36, contents={Germering}}
\mrcmarker{style/color=red, position=48.14:11.57, contents={M\"unchen}}
\end{tikzpicture}
```



`/mermap/marker/style``=⟨style name⟩` (no default, initially unset)

Applies a given `⟨style name⟩`, i.e. all options which were stored by `\mrcnewmarkerstyle` under this name.

8 Routes

Routes are TikZ path objects which can be drawn with the appropriate TikZ macros and the coordinate system documented in Section 3 on page 17. Nevertheless, in the following some alternatives are described which allow to specify a path by a sequence of points (`\mrcpoint`). The idea is that such a sequence of points is exported by a third-party application for inclusion in a L^AT_EX map, see Section 8.2 on page 75.

8.1 Route Path Definition

```
\begin{mrcroute}[\langle options \rangle]
\langle environment content \rangle
\end{mrcroute}
```

This environment creates a TikZ path with given TikZ *options*. The *environment content* is a sequence of points made by `\mrcpoint`.

```
\begin{mrcroute}[red, very thick]
  \mrcpoint{48.137222}{11.575556}
  \mrcpoint{49.019479}{12.0976942}
  ...
\end{mrcroute}
```

Note that a map definition by `\mrcdefinemap`^{→ P. 18}, `\mrcmap`^{→ P. 35}, or `\mrcapplymap`^{→ P. 35} is needed before a route path can be drawn.

```
\begin{mrcroute*}[\langle options \rangle]
\langle environment content \rangle
\end{mrcroute*}
```

Identical to `mrcroute`, but the created TikZ path is closed.

```
\mrcrouteinput[\langle options \rangle]{\langle filename \rangle}
```

Identical to `mrcroute`, but the sequence of points is included from a file with the given *filename*.

```
\mrcrouteinput*[\langle options \rangle]{\langle filename \rangle}
```

Identical to `\mrcrouteinput`, but the created TikZ path is closed.

```
\mrcpoint{\langle latitude \rangle}{\langle longitude \rangle}
```

Specifies a single coordinate point with given *latitude* and *longitude* as part of sequence inside `mrcroute`.

This is a wrapper for `\pgfpathmoveto` respectively `\pgfpathlineto`.


```
/mermap/every route=\langle options \rangle (no default, initially empty)
```

Sets TikZ *options* which are applied to every `mrcroute` and `\mrcrouteinput`.

```

% \mrcsetapikey{thunderforest}{YOUR-API-KEY} % registered key
\begin{tikzpicture}
  \mrcmap[type=areafit,
    west=5,east=15,south=47,north=55,
    source=thunderforest neighbourhood,
    tex width=14cm, tex height=14cm,
    flex area fit=5mm
  ]{routes_example}
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcclipmap
  \path[draw] (mrcmap.south west) rectangle (mrcmap.north east);
  \begin{mrcroute}[blue,line width=0.4mm,line cap=round,
    line join=round,double=blue!5!white,double distance=0.4mm]
    \mrcpoint{48.137222}{11.575556}
    \mrcpoint{49.019479}{12.0976942}
    \mrcpoint{49.45522}{11.07631}
    \mrcpoint{50.978056}{11.029167}
    \mrcpoint{52.518611}{13.408333}
  \end{mrcroute}
\end{tikzpicture}

```

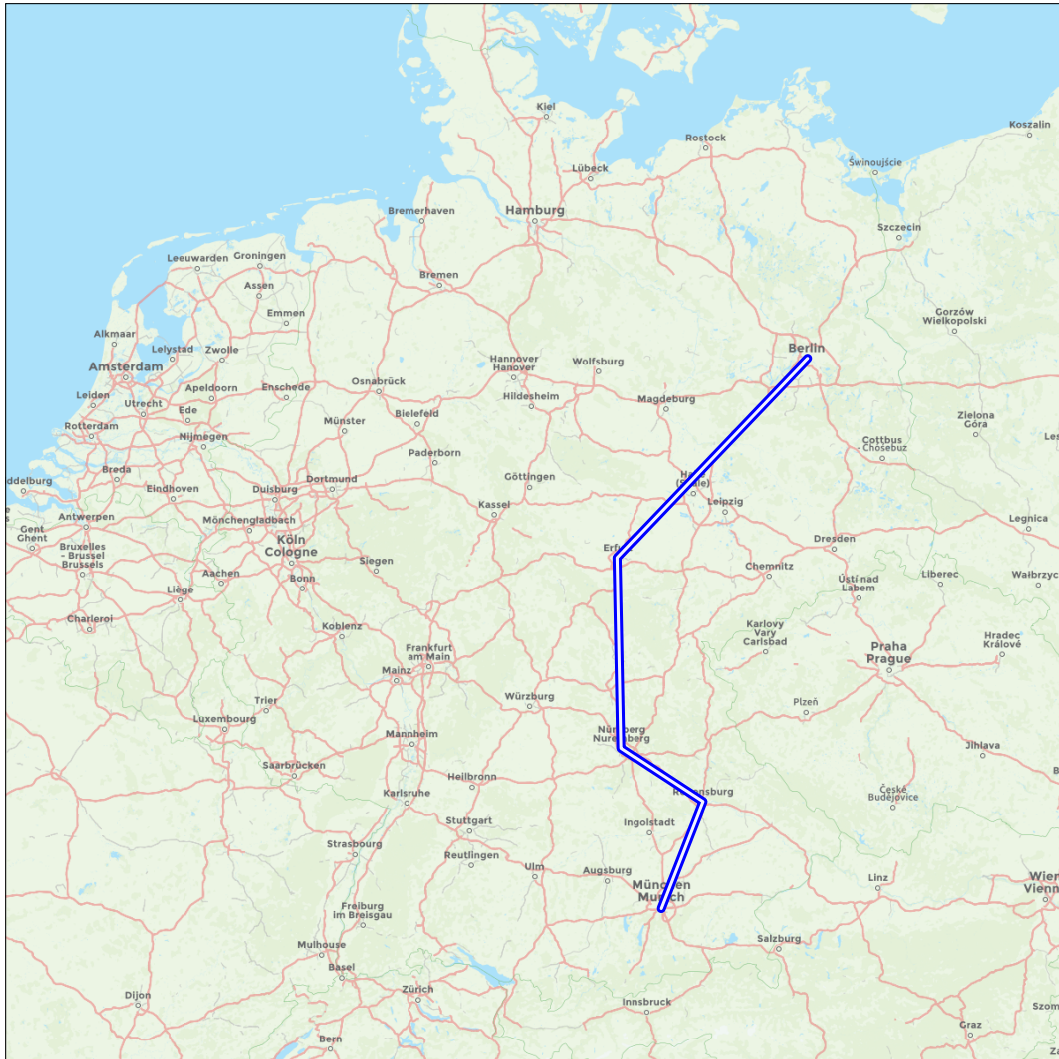

Maps © Thunderforest, Data © OpenStreetMap contributors

8.2 Example Python Conversion Scripts for gpx

The following scripts are examples for conversions from a standard routes and tracks of **gpx** files to L^AT_EX include files (assuming a single route/track per file).

Python 3 script to convert route.gpx to a sequence of points file route.inc

```
import xmltodict

with open('route.gpx', encoding='utf-8') as gpx:
    doc = xmltodict.parse(gpx.read())
    with open('route.inc', "w", encoding="utf-8") as inc:
        for rtept in doc['gpx']['rte']['rtept']:
            lat = rtept['@lat']
            lon = rtept['@lon']
            inc.write(f'\\mrcpoint{{{lat}}}{{{lon}}}\n')
```

Python 3 script to convert track.gpx to a sequence of points file track.inc

```
import xmltodict

with open('track.gpx', encoding='utf-8') as gpx:
    doc = xmltodict.parse(gpx.read())
    with open('track.inc', "w", encoding="utf-8") as inc:
        for trkpt in doc['gpx']['trk']['trkseg']['trkpt']:
            lat = trkpt['@lat']
            lon = trkpt['@lon']
            inc.write(f'\\mrcpoint{{{lat}}}{{{lon}}}\n')
```

9 Orthodromes and Loxodromes

A loxodrome is a curve which crosses all meridians with a constant angle. On Mercator maps, loxodromes are depicted as straight lines and can be drawn by simple TikZ path elements.

On a sphere, the shortest path from one point to another runs along an orthodrome where an orthodrome is a great-circle.

The mathematical background and further information are found in [1].

9.1 Orthodrome Drawing

`/mermap/samples=<number>` (no default, initially 100)

An orthodrome curve is approximated by a polygon trajectory with `<number>` pieces.


`/tikz/mermap samples=<number>` (style, no default)

TikZ variant to set `/mermap/samples`.

`\mrcdraworthodrome[<options>]{<lat1>}{<lon1>}{<lat2>}{<lon2>}`

Draws an orthodrome curve from a point with latitude `<lat1>` and longitude `<lon1>` to a point with latitude `<lat2>` and longitude `<lon2>`. This is a TikZ path object where `<options>` are TikZ settings for this path. There are two orthodrome pieces connecting two positions (forming a great-circle). `\mrcdraworthodrome` does not necessarily choose the shorter one, see [1]. The drawn orthodrome is a spherical approximation instead of an ellipsoidal one.

```
\begin{tikzpicture}
  \mrcmap[type=areafit,
    south=40.7,north=48.2,west=-74.1,east=11.6,
    source=topplusopen web,
    tex width=\linewidth,tex height=6cm,
  ]{ortho_orthodrome1}
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcclipmap
  \draw (mrcmap.south west) rectangle (mrcmap.north east);
  \mrcdraworthodrome[red,very thick,mermap samples=100]
    {48.14}{11.58}{40.71}{-74.01}
  \node[red,fill=white] at ([above=1.3cm]mrcmap) {
    \mrcprettyorthodistance{48.14}{11.58}{40.71}{-74.01} };
\end{tikzpicture}
```

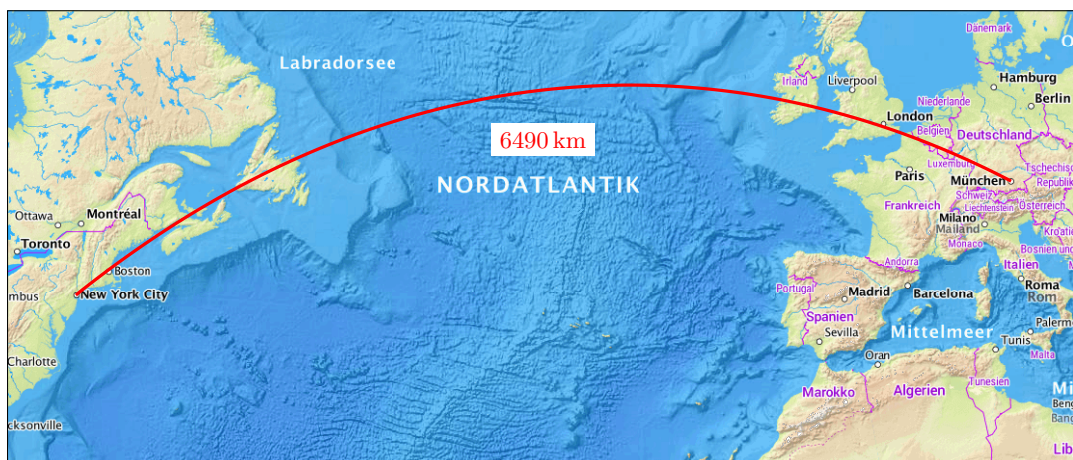


© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

`\mrcNPdraworthodrome[$\langle options \rangle$]{ $\langle name1 \rangle$ }{ $\langle name2 \rangle$ }`

Identical to `\mrcdraworthodrome`^{→ P. 76}, but the start and end point are described by named positions $\langle name1 \rangle$ and $\langle name2 \rangle$.

```
\begin{tikzpicture}
  \mrcNPdef{munich}{48.14}{11.58}
  \mrcNPdef{newyork}{40.71}{-74.01}
  \mrcmap[type=areafit, area={munich,newyork},
    source=topplusopen web,
    tex width=\linewidth, tex height=6cm,
    ]{ortho_orthodrome2}
  \mrcdrawmap
  \node[below, font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcclipmap
  \draw (mrcmap.south west) rectangle (mrcmap.north east);
  \mrcmarker{type=pin, named position=munich, contents={M\ "unchen}}
  \mrcmarker{type=pinflip, shift=5mm, named position=newyork,
    contents={New York City}}
  \mrcNPdraworthodrome[red, very thick] {munich}{newyork}
  \draw[blue, very thick] (\mrcNPcs{munich}) -- (\mrcNPcs{newyork});
  \node[red, fill=white] at ([above=1.3cm]mrcmap) {
    \mrcNPprettyorthodistance{munich}{newyork} };
  \node[blue, fill=white] at ([below=5mm]mrcmap) {
    \mrcNPprettyloxodistance{munich}{newyork} };
\end{tikzpicture}
```

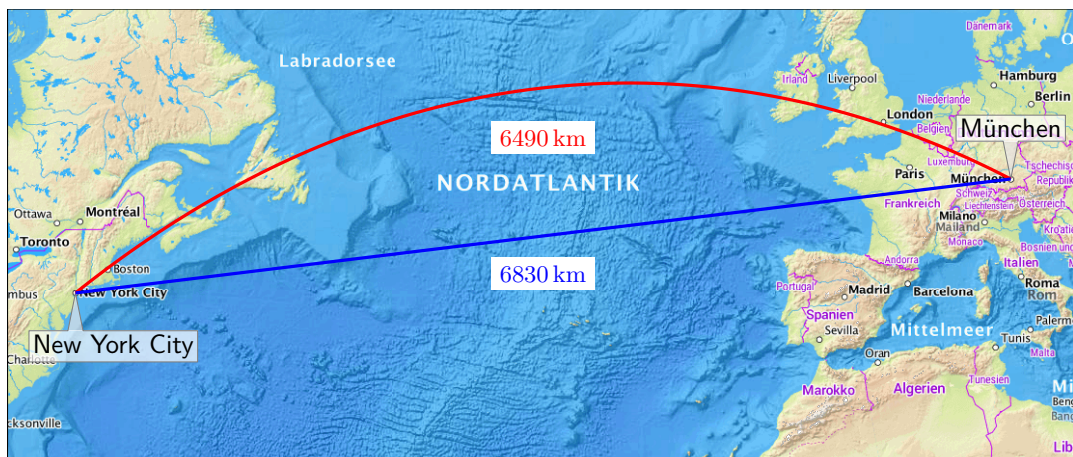

9.2 Orthodromic and Loxodromic Distances

`\mrcprettyorthodistance`{ $\langle lat1 \rangle$ }{ $\langle lon1 \rangle$ }{ $\langle lat2 \rangle$ }{ $\langle lon2 \rangle$ }

Approximate orthodromic distance between two points with latitude $\langle lat1 \rangle$, longitude $\langle lon1 \rangle$ and latitude $\langle lat2 \rangle$, longitude $\langle lon2 \rangle$ with three valid digits.

```
\mrcprettyorthodistance{48.14}{11.58}{40.71}{-74.01}
```

6490 km

`\mrcNPprettyorthodistance`{ $\langle name1 \rangle$ }{ $\langle name2 \rangle$ }

Approximate orthodromic distance between two named positions $\langle name1 \rangle$ and $\langle name2 \rangle$ with three valid digits.

```
\mrcNPdef{munich}{48.14}{11.58}  
\mrcNPdef{newyork}{40.71}{-74.01}  
\mrcNPprettyorthodistance{munich}{newyork}
```

6490 km

`\mrcstoreorthodistance`{ $\langle macro \rangle$ }{ $\langle lat1 \rangle$ }{ $\langle lon1 \rangle$ }{ $\langle lat2 \rangle$ }{ $\langle lon2 \rangle$ }

Stores the approximate orthodromic distance (in kilometers) between two points with latitude $\langle lat1 \rangle$, longitude $\langle lon1 \rangle$ and latitude $\langle lat2 \rangle$, longitude $\langle lon2 \rangle$ to a given $\langle macro \rangle$.

```
\mrcstoreorthodistance\mydist{48.14}{11.58}{40.71}{-74.01}  
\mydist
```

6488.72407474055

`\mrcprettyloxodistance`{ $\langle lat1 \rangle$ }{ $\langle lon1 \rangle$ }{ $\langle lat2 \rangle$ }{ $\langle lon2 \rangle$ }

Approximate loxodromic distance between two points with latitude $\langle lat1 \rangle$, longitude $\langle lon1 \rangle$ and latitude $\langle lat2 \rangle$, longitude $\langle lon2 \rangle$ with three valid digits.

```
\mrcprettyloxodistance{48.14}{11.58}{40.71}{-74.01}
```

6830 km

`\mrcNPprettyloxodistance`{ $\langle name1 \rangle$ }{ $\langle name2 \rangle$ }

Approximate loxodromic distance between two named positions $\langle name1 \rangle$ and $\langle name2 \rangle$ with three valid digits.

```
\mrcNPdef{munich}{48.14}{11.58}  
\mrcNPdef{newyork}{40.71}{-74.01}  
\mrcNPprettyloxodistance{munich}{newyork}
```

6830 km

`\mrcstoreloxodistance`{ $\langle macro \rangle$ }{ $\langle lat1 \rangle$ }{ $\langle lon1 \rangle$ }{ $\langle lat2 \rangle$ }{ $\langle lon2 \rangle$ }

Stores the approximate loxodromic distance (in kilometers) between two points with latitude $\langle lat1 \rangle$, longitude $\langle lon1 \rangle$ and latitude $\langle lat2 \rangle$, longitude $\langle lon2 \rangle$ to a given $\langle macro \rangle$.

```
\mrcstoreloxodistance\mydist{48.14}{11.58}{40.71}{-74.01}  
\mydist
```

6833.046494937649


10 Limitations and Caveats

10.1 No Polar Regions

The standard Mercator projection is not suited for north or south polar regions. The Web Mercator projections only covers positions between 85.0511° S and 85.0511° N with map tiles. Equally, the `mercatormap` package does only provide support for this area.

If your map overlaps to south of 85.0511° S or to north of 85.0511° N, compiler errors are possible because of internal computation limitations. In any case, there are no map tiles.

```
\begin{tikzpicture}
  \mrcmap[type=reference,latitude=-85.0511,longitude=0,zoom=3,
    source=opentopomap,
    tex width=\linewidth, tex height=8cm]{}
  \mrcdrawmap
  \node[above=4mm,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcclipmap
  \mrcdrawnetwork[network pieces=10,network distance=10mm]
  \path[draw] (mrcmap.south west) rectangle (mrcmap.north east);
  \mrcmarker{type=pin,position=-85.0511:0,
    contents={End of the mapped world}}
\end{tikzpicture}
```

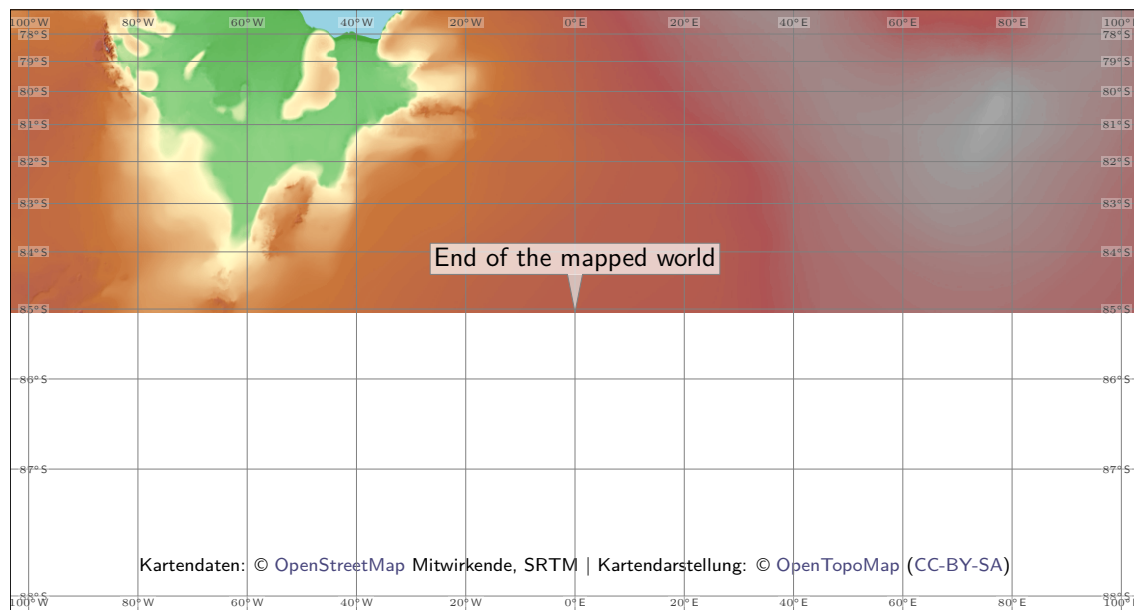


10.2 International Dateline (180th Meridian)

If your map includes the 180th meridian (more or less the international dateline), remember that the eastern hemisphere lies *west* and the western hemisphere lies *east* for your map. Consider the following example displaying Vladivostok and Anchorage. Here, `/mermap/supply/west`^{P. 30} is set to 130° E (130) and `/mermap/supply/east`^{P. 30} is set to 149° W (211 instead of -149).

There is some automatic correction for positions to fit inside the defined map (see Anchorage in the example below), but *west* should be lower than *east*.

```
% \mrcsetapikey{openrouteservice}{YOUR-API-KEY} % registered key
\begin{tikzpicture}
  \mrcmap[type=areafit, tex width=\linewidth, tex height=8cm,
    source=openrouteservice mapsurfer,
    south=42, north=62, west=130, east=-149+360] {}
  \mrcdrawmap
  \node[below, font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution};
  \mrcclipmap
  \draw (mrcmap.south west) rectangle (mrcmap.north east);
  \draw (mrc cs:lat=\mrcmapsouth, lon=180)
    -- node[sloped, above] {180th meridian}
      node[sloped, below, red] {add 360 to longitude for eastern border}
    (mrc cs:lat=\mrcmapnorth, lon=180);
  \mrcmarker{type=pin, position=61.22:-149.88, contents={Anchorage}}
  \mrcmarker{type=pin, position=43.12:131.9, contents={Vladivostok}}
\end{tikzpicture}
```

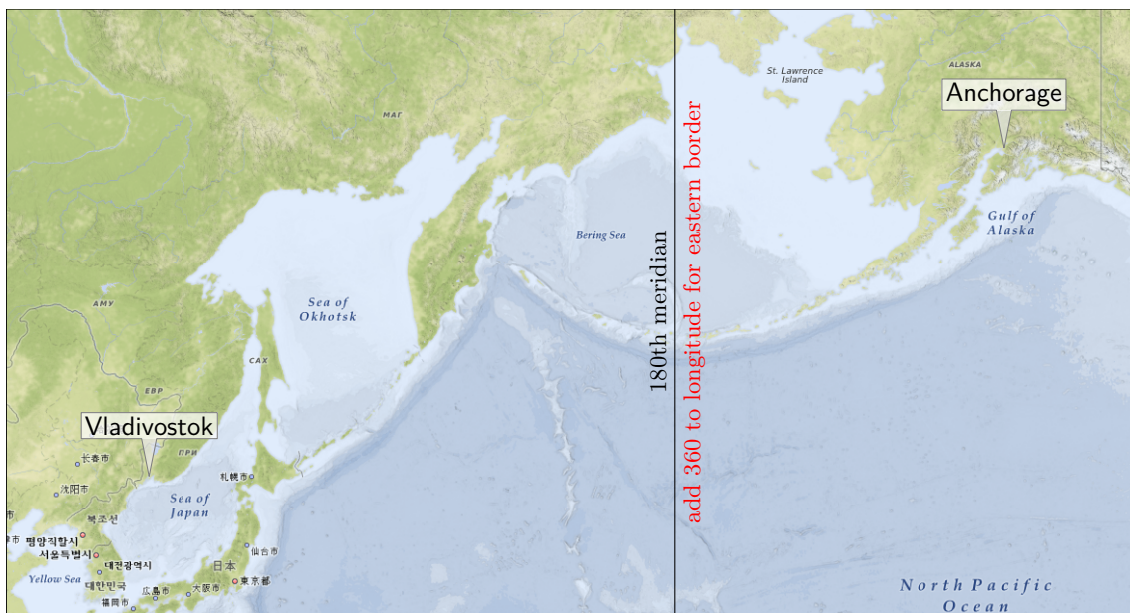


Service © openrouteservice.org | Map data © OpenStreetMap contributors

10.3 Very small Scale Maps

If a map has a very small scale, a coordinate point may appear more than once on the map. But, the map coordinates of this package will only pilot to a single point:


```
\begin{tikzpicture}
  \mrcmap[type=reference,latitude=48.14,longitude=11.57,
    source=opentopomap,
    tex width=\linewidth,tex height=4cm,zoom=1]{}
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution}; \mrcclipmap
  \path[draw] (mrcmap.south west) rectangle (mrcmap.north east);
  \mrcmarker{type=pin,position=61.22:-149.88,contents={Anchorage}}
  \mrcmarker{type=pin,position=43.12:131.9,contents={Vladivostok}}
\end{tikzpicture}
```

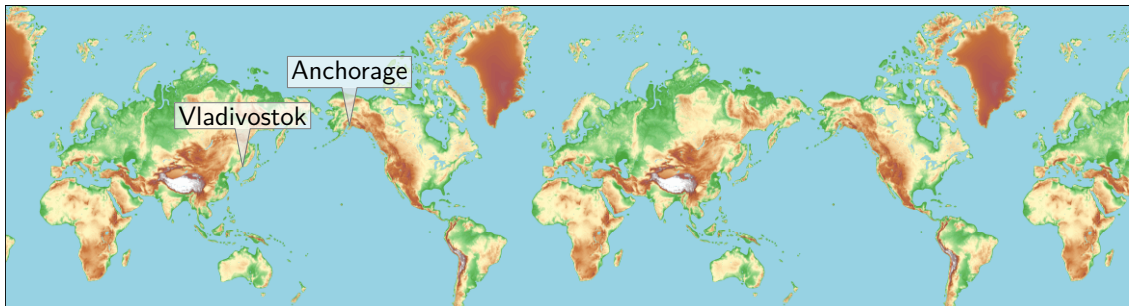

Kartendaten: © OpenStreetMap Mitwirkende, SRTM | Kartendarstellung: © OpenTopoMap (CC-BY-SA)

You cannot trust too much in figures from `\mrcprettymapscale`^{→ P. 56}, `\mrcprettymapwidth`^{→ P. 56}, `\mrcprettymapheight`^{→ P. 56}, etc for large and medium scale maps. For small scale maps, these figures are worse and even misleading. Better do not use them:

```
\mermapset{supply/source=opentopomap}
\begin{tikzpicture}
  \mrcmap[type=reference,latitude=48.14,longitude=11.57,
    tex width=\linewidth,tex height=6cm,zoom=2]{}
  \mrcdrawmap
  \node[below,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south)
    {\mrcmapattribution}; \mrcclipmap \mrcdrawinfo
\end{tikzpicture}
```

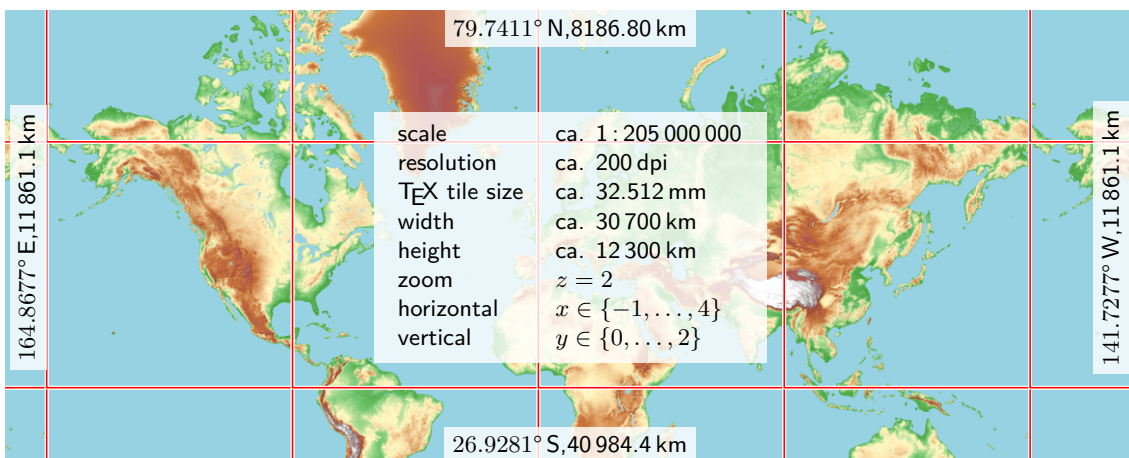

Kartendaten: © OpenStreetMap Mitwirkende, SRTM | Kartendarstellung: © OpenTopoMap (CC-BY-SA)

10.4 Zoom is not Scale

Using the same zoom value for different latitudes can give completely different scales. The following example for Oslo and Rio de Janeiro at zoom 12 scales to 1:151000 and otherwise 1:277000.


```
\mermapsetsupply{source=stamen terrain, type=reference, zoom=12,
tex width=7cm, tex height=5cm}
\begin{tikzpicture}
\mrcmap[latitude=59.91,longitude=10.75]{oslo1} \mrcdrawmap
\end{tikzpicture}\hfill\begin{tikzpicture}
\mrcmap[latitude=-22.91,longitude=-43.20]{rio1} \mrcdrawmap
\end{tikzpicture}
\begin{center}\fontsize{7pt}{7pt}\sffamily\mrcmapattribution\end{center}
```



Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

Same example again, but with `/mermap/flex scale`^{P.52} which gives 1:150000 for both cities and comparable maps.

```
\mermapsetsupply{source=stamen terrain, type=reference}
\begin{tikzpicture}
\mrcmap[latitude=59.91,longitude=10.75, flex reference scale=150000,
tex width=7cm, tex height=5cm]{oslo2} \mrcdrawmap
\end{tikzpicture}\hfill\begin{tikzpicture}
\mrcmap[latitude=-22.91,longitude=-43.20, flex reference scale=150000,
tex width=7cm, tex height=5cm]{rio2} \mrcdrawmap
\end{tikzpicture}
\begin{center}\fontsize{7pt}{7pt}\sffamily\mrcmapattribution\end{center}
```

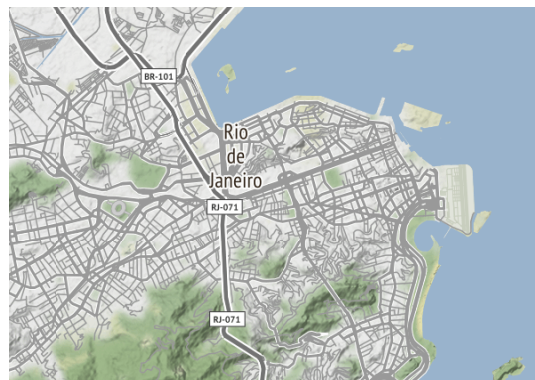

Map tiles by Stamen Design, under CC BY 3.0. Data by OpenStreetMap, under ODbL.

10.5 Distances

There are at least three kinds of distance measures between two points on the map:


- Measure the distance with a ruler on the printed (or displayed) map and multiply with the `\mrcmapscaledominator`^{→P.55}. Note that the map scale denominator is only (approximately) correct for the map center.
- Compute the loxodromic distance, e.g. with `\mrcstoreloxodistance`^{→P.78} which gives the (approximated) distance following a loxodrome. On our Mercator map, this would be equal to the ruler method from above, if the map scale would be constant.
- Compute the orthodromic distance, e.g. with `\mrcstoreorthodistance`^{→P.78} which gives the (approximated) shortest distance following an orthodrome.

Apart from the approximate nature of the implementation, these distances are expected to be quite identical for large scale maps, but not for (very) small scale maps.

```


\begin{tikzpicture}
  \mrcNPdef{munich}{48.137222}{11.575556}
  \mrcNPdef{fraunberg}{48.3685075}{11.9894209}
  \mrcmap[type=reference, named position=munich,
    flex reference scale=1000000,
    source=topplusopen web,
    tex width=\linewidth, tex height=10cm]{}
  \mrcdrawmap
  \node[below left,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south east)
    {\mrcmapattribution};
  \node[below right,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south west)
    {\mrcprettymapscale};
  \mrcclipmap
  \path[draw] (\mrcNPcs{munich}) circle (\mrckmtotex{40});
  \node[above,fill=white,opacity=0.85,text opacity=1]
    at ([yshift=\mrckmtotex{40}]\mrcNPcs{munich}) {\SI{40}{km}};
  \draw[blue,very thick] (\mrcNPcs{munich}) -- (\mrcNPcs{fraunberg});
  \mrcNPdraworthodrome[red,very thick] {munich}{fraunberg}
  \path (\mrcNPcs{munich}) --
    node[sloped,above=3mm,red,fill=white,opacity=0.85,text opacity=1]
      { \mrcNPprettyorthodistance{munich}{fraunberg} }
    node[sloped,below=3mm,blue,fill=white,opacity=0.85,text opacity=1]
      { \mrcNPprettyloxodistance{munich}{fraunberg} }
    (\mrcNPcs{fraunberg});
  \mrcmarker{type=pin,named position=munich,contents={M\unchen}}
  \mrcmarker{type=pin,named position=fraunberg,contents={Fraunberg}}
\end{tikzpicture}

```

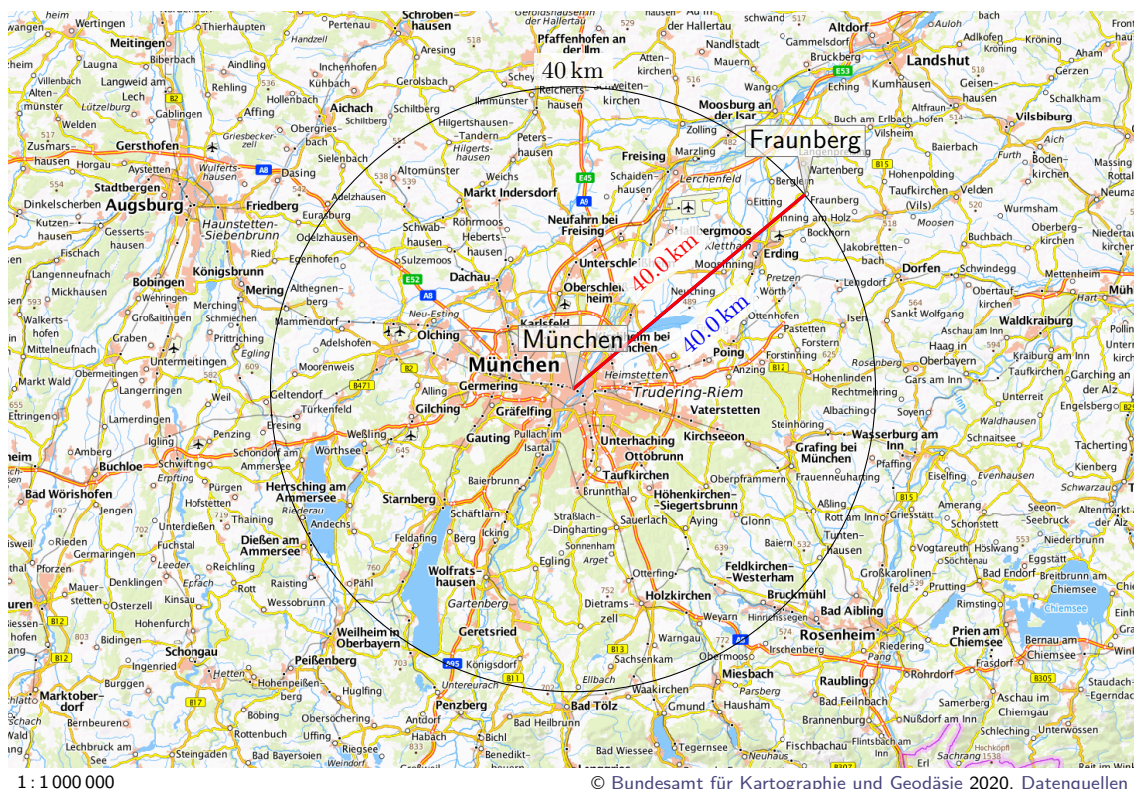

The next example gives notable different distances. The aberration is dependent from the center angle.


```
\begin{tikzpicture}
\mrcNPdef{munich}{48.137222}{11.575556}
\mrcNPdef{barcelona}{41.3947688}{2.0787285}
\mrcmap[type=reference,named position=munich,
flex reference scale=25000000,
source=topplusopen web,
tex width=\linewidth, tex height=10cm]{}
\mrcdrawmap
\node[below left,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south east)
{\mrcmapattribution};
\node[below right,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south west)
{\mrcprettymapscale};
\mrcclipmap
\path[draw] (\mrcNpcs{munich}) circle (\mrckmtotex{1000});
\node[above,fill=white,opacity=0.85,text opacity=1]
at ([yshift=\mrckmtotex{1000}]\mrcNpcs{munich}) {\SI{1000}{km}};
\draw[blue,very thick] (\mrcNpcs{munich}) -- (\mrcNpcs{barcelona});
\mrcNPdraworthodrome[red,very thick]{munich}{barcelona}
\path (\mrcNpcs{munich}) --
node[sloped,above=3mm,red,fill=white,opacity=0.85,text opacity=1]
{ \mrcNPprettyorthodistance{munich}{barcelona} }
node[sloped,below=3mm,blue,fill=white,opacity=0.85,text opacity=1]
{ \mrcNPprettyloxodistance{munich}{barcelona} }
(\mrcNpcs{barcelona});
\mrcmarker{type=pin,named position=munich,contents={M\"unchen}}
\mrcmarker{type=pinflip,named position=barcelona,contents={Barcelona}}
\end{tikzpicture}
```

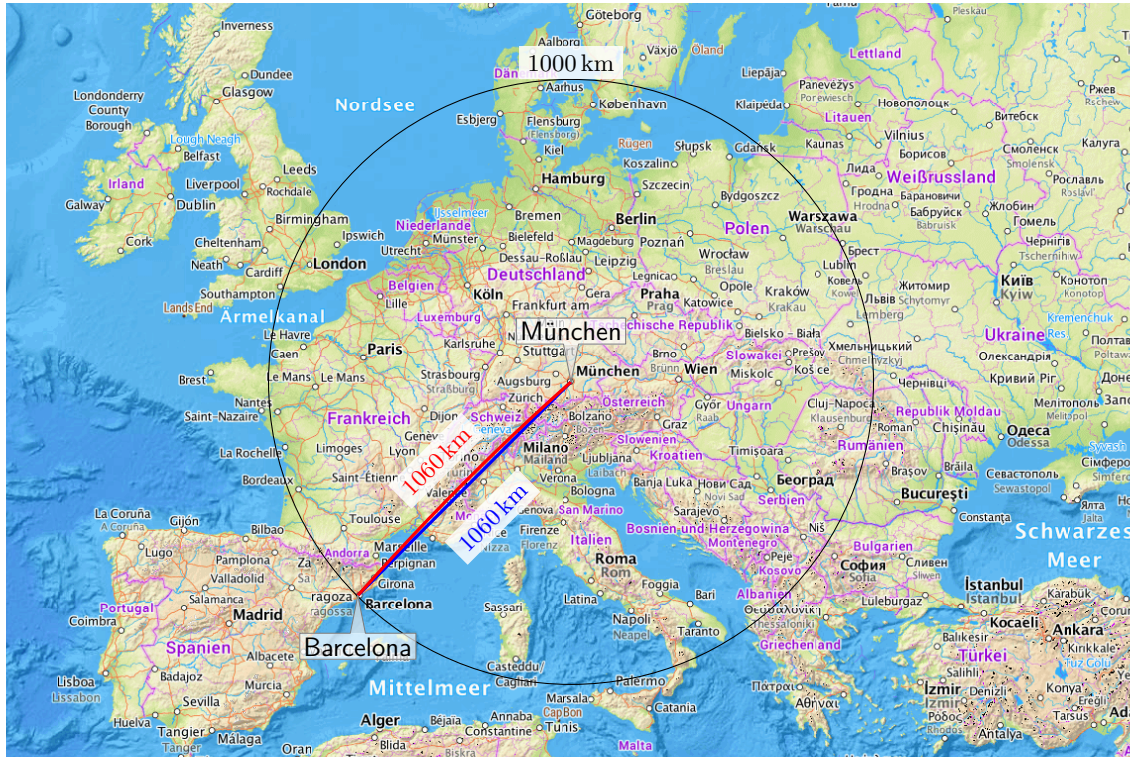

© Bundesamt für Kartographie und Geodäsie 2020, Datenquellen

The following small scale example contains unacceptable deviations from the displayed circle radius of 3000km. The aberration is highly dependent from the center angle. For such small scale maps, displaying a distance circle should be avoided.

```
\begin{tikzpicture}
\mrcNPdef{munich}{48.137222}{11.575556}
\mrcNPdef{neskaup}{65.1446431}{-13.7420082}
\mrcNPdef{atyrau}{47.0971204}{51.866263}
\mrcNPdef{dakhla}{24.2026691}{-15.4883971}
\mrcmap[type=reference, named position=munich,
flex reference scale=75000000,
source=topplusopen web,
tex width=\linewidth, tex height=10cm]{}
\mrcdrawmap
\node[below left,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south east)
{\mrcmapattribution};
\node[below right,font=\fontsize{7pt}{7pt}\sffamily] at (mrcmap.south west)
{\mrcprettymapscale};
\mrcclipmap
\path[draw] (\mrcNPcs{munich}) circle (\mrcmtotex{3000});
\node[above,fill=white,opacity=0.85,text opacity=1]
at ([yshift=\mrcmtotex{3000}]\mrcNPcs{munich}) {\SI{3000}{km}};
\draw[blue,very thick] (\mrcNPcs{munich}) -- (\mrcNPcs{neskaup});
\mrcNPdraworthodrome[red,very thick] {munich}{neskaup}
\path (\mrcNPcs{munich}) --
node[sloped,above=3mm,red,fill=white,opacity=0.85,text opacity=1]
{ \mrcNPprettyorthodistance{munich}{neskaup} }
node[sloped,below=3mm,blue,fill=white,opacity=0.85,text opacity=1]
{ \mrcNPprettyloxodistance{munich}{neskaup} }
(\mrcNPcs{neskaup});
\draw[blue,very thick] (\mrcNPcs{munich}) -- (\mrcNPcs{atyrau});
\mrcNPdraworthodrome[red,very thick] {munich}{atyrau}
\path (\mrcNPcs{munich}) --
node[sloped,above=3mm,red,fill=white,opacity=0.85,text opacity=1]
{ \mrcNPprettyorthodistance{munich}{atyrau} }
node[sloped,below=3mm,blue,fill=white,opacity=0.85,text opacity=1]
{ \mrcNPprettyloxodistance{munich}{atyrau} }
(\mrcNPcs{atyrau});
\draw[blue,very thick] (\mrcNPcs{munich}) -- (\mrcNPcs{dakhla});
\mrcNPdraworthodrome[red,very thick] {munich}{dakhla}
\path (\mrcNPcs{munich}) --
node[sloped,above=3mm,red,fill=white,opacity=0.85,text opacity=1]
{ \mrcNPprettyorthodistance{munich}{dakhla} }
node[sloped,below=3mm,blue,fill=white,opacity=0.85,text opacity=1]
{ \mrcNPprettyloxodistance{munich}{dakhla} }
(\mrcNPcs{dakhla});
\mrcmarker{type=pinflip,named position=munich,contents={M\"unchen}}
\mrcmarker{type=pin,named position=neskaup,contents={Neskaupsta\dh ur}}
\mrcmarker{type=pin,named position=atyrau,contents={Atyrau}}
\mrcmarker{type=pinflip,named position=dakhla,contents={Ad-Dakhla}}
\end{tikzpicture}
```

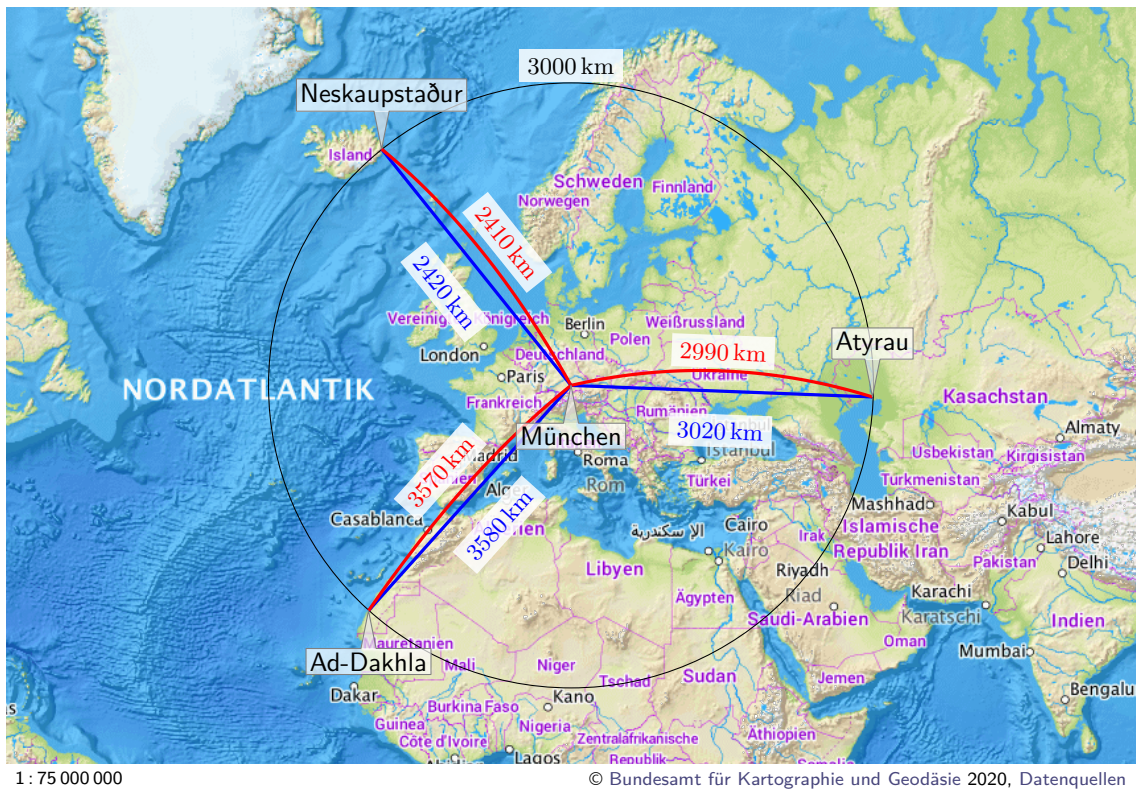

11 Version History

v1.00 (2020/04/20)

- Initial public release.

References

- [1] Thomas F. Sturm. *Some Principles of Web Mercator Maps and their Computation*. Monograph. Neubiberg: Universität der Bundeswehr München, Mar. 5, 2020. 44 pages. DOI: [10.18726/2020_3](https://doi.org/10.18726/2020_3).
- [2] Till Tantau. *The TikZ and PGF Packages. Manual for version 3.1.5b*. Jan. 8, 2020. <http://mirrors.ctan.org/graphics/pgf/base/doc/pgfmanual.pdf>.
- [3] The L^AT_EX3 Project. *The expl3 package and L^AT_EX3 programming*. Apr. 6, 2020. <http://mirrors.ctan.org/macros/latex/contrib/l3kernel/expl3.pdf>.
- [4] The L^AT_EX3 Project. *The xparse package. Document command parser*. Mar. 6, 2020. <http://mirrors.ctan.org/macros/latex/contrib/l3packages/xparse.pdf>.
- [5] Joseph Wright. *siunitx – A comprehensive (SI) units package*. Feb. 25, 2020. <http://mirrors.ctan.org/macros/latex/contrib/siunitx/siunitx.pdf>.

Index

- `areafit` value, 9, 28–31, 34
- `auto` value, 50
-
- `boundaries` value, 10, 28–30, 33
-
- `center` value, 31
- `classic` value, 65, 70, 71
- Colors
 - `mrcmarkerdraw`, 70
 - `mrcmarkerfill`, 70, 71
 - `mrcmarkertext`, 70
- `cs/lat` key, 21
- `cs/latitude` key, 20
- `cs/lon` key, 21
- `cs/longitude` key, 20
-
- `decimal` value, 24
- `decimal-0` value, 24, 25
- `decimal-1` value, 24
- `decimal-2` value, 24
- `decimal-3` value, 25
- `decimal-4` value, 25
- `definition prefix` key, 29
- `degree` value, 25
- `draw` key, 50
- `drop` value, 66, 70, 71
- `dummy` value, 36
-
- `east` value, 31
- Environments
 - `mrcroute`, 73
 - `mrcroute*`, 73
- `every route` key, 73
-
- `flex scale` key, 52
- `flex tile size` key, 51
- `flex zoom` key, 51
- `format angle` key, 24
- `format east` key, 26
- `format NEWS absolute` key, 26
- `format NEWS numeric` key, 26
- `format north` key, 25
- `format south` key, 25
- `format west` key, 26
-
- `\ifmrcinmap`, 23
- `\ifmrcinvicinity`, 23
- `\ifmrcNPinmap`, 23
- `\ifmrcNPinvicinity`, 23
-
- Keys
 - `/mermap/`
 - `cs/lat`, 21
 - `cs/latitude`, 20
 - `cs/lon`, 21
 - `cs/longitude`, 20
 - `definition prefix`, 29
 - `draw`, 50
 - `every route`, 73
 - `flex scale`, 52
 - `flex tile size`, 51
 - `flex zoom`, 51
 - `format angle`, 24
 - `format east`, 26
 - `format NEWS absolute`, 26
 - `format NEWS numeric`, 26
 - `format north`, 25
 - `format south`, 25
 - `format west`, 26
 - `map clip`, 50
 - `map path`, 50
 - `map scope`, 50
 - `mapdef/attribution`, 19
 - `mapdef/attribution print`, 19
 - `mapdef/basename`, 19
 - `mapdef/east`, 18
 - `mapdef/north`, 18
 - `mapdef/northoffset`, 19
 - `mapdef/pixelheight`, 19
 - `mapdef/pixelwidth`, 18
 - `mapdef/resource`, 19
 - `mapdef/south`, 18
 - `mapdef/southoffset`, 19
 - `mapdef/tile size`, 19
 - `mapdef/west`, 18
 - `mapdef/westoffset`, 19
 - `mapdef/xmax`, 18
 - `mapdef/xmin`, 18
 - `mapdef/ymax`, 18
 - `mapdef/ymin`, 18
 - `mapdef/zoom`, 18
 - `marker/alias`, 63
 - `marker/angle`, 70
 - `marker/category`, 63
 - `marker/contents`, 63
 - `marker/draw`, 70
 - `marker/fill`, 70
 - `marker/first options`, 63
 - `marker/font`, 70
 - `marker/hide`, 64
 - `marker/hide all but category`, 64
 - `marker/hide category`, 64
 - `marker/inner radius`, 70
 - `marker/last options`, 63
 - `marker/lat`, 63
 - `marker/latitude`, 63
 - `marker/lon`, 63
 - `marker/longitude`, 63
 - `marker/named position`, 63
 - `marker/node style`, 71
 - `marker/path style`, 71
 - `marker/pictocontents`, 63
 - `marker/position`, 63
 - `marker/radius`, 70

- marker/shift, 70
- marker/show, 64
- marker/show all but category, 64
- marker/show category, 64
- marker/style, 72
- marker/text, 70
- marker/type, 65
- marker/use inside, 63
- marker/uuid, 63
- named flex scale, 52
- network distance, 53
- network font, 53
- network pieces, 53
- python, 27
- samples, 76
- scalebar/at, 59
- scalebar/double, 61
- scalebar/height, 59
- scalebar/major style, 60
- scalebar/minor style, 60
- scalebar/north-east-inside, 60
- scalebar/north-east-outside, 60
- scalebar/north-west-inside, 60
- scalebar/north-west-outside, 60
- scalebar/partitions, 59
- scalebar/placement, 60
- scalebar/scale, 61
- scalebar/single, 61
- scalebar/solid, 61
- scalebar/south-east-inside, 60
- scalebar/south-east-outside, 60
- scalebar/south-west-inside, 60
- scalebar/south-west-outside, 60
- scalebar/transparent, 61
- scalebar/width-in-kilometer, 59
- scalebar/width-in-km, 59
- scalebar/width-in-meter, 59
- scalebar/width-in-mile, 59
- scalebar/width-in-yard, 59
- supply/add area, 30
- supply/align, 31
- supply/area, 30
- supply/area to reference, 30
- supply/attribution, 32
- supply/attribution print, 32
- supply/basename, 32
- supply/dpi, 35
- supply/east, 30
- supply/flex area fit, 34
- supply/flex area scale, 33
- supply/flex reference scale, 33
- supply/height, 31
- supply/latitude, 30
- supply/longitude, 30
- supply/named position, 30
- supply/north, 30
- supply/pixel, 35
- supply/position, 30
- supply/source, 36
- supply/south, 30
- supply/target, 31
- supply/tex height, 31
- supply/tex width, 31
- supply/type, 29
- supply/url, 32
- supply/url with api key, 32
- supply/west, 30
- supply/width, 31
- supply/zoom, 30
- tile size, 51
- vicinity, 23
- /tikz/
 - mermap samples, 76
- knob value, 68, 70, 71
- map value, 63
- map clip key, 50
- map path key, 50
- map scope key, 50
- mapdef/attribution key, 19
- mapdef/attribution print key, 19
- mapdef/basename key, 19
- mapdef/east key, 18
- mapdef/north key, 18
- mapdef/northoffset key, 19
- mapdef/pixelheight key, 19
- mapdef/pixelwidth key, 18
- mapdef/resource key, 19
- mapdef/south key, 18
- mapdef/southoffset key, 19
- mapdef/tile size key, 19
- mapdef/west key, 18
- mapdef/westoffset key, 19
- mapdef/xmax key, 18
- mapdef/xmin key, 18
- mapdef/ymax key, 18
- mapdef/ymin key, 18
- mapdef/zoom key, 18
- marker/alias key, 63
- marker/angle key, 70
- marker/category key, 63
- marker/contents key, 63
- marker/draw key, 70
- marker/fill key, 70
- marker/first options key, 63
- marker/font key, 70
- marker/hide key, 64
- marker/hide all but category key, 64
- marker/hide category key, 64
- marker/inner radius key, 70
- marker/last options key, 63
- marker/lat key, 63
- marker/latitude key, 63
- marker/lon key, 63
- marker/longitude key, 63
- marker/named position key, 63
- marker/node style key, 71
- marker/path style key, 71
- marker/pictocontents key, 63

marker/position key, 63
 marker/radius key, 70
 marker/shift key, 70
 marker/show key, 64
 marker/show all but category key, 64
 marker/show category key, 64
 marker/style key, 72
 marker/text key, 70
 marker/type key, 65
 marker/use inside key, 63
 marker/uuid key, 63
 markx value, 70, 71
 mergedmap value, 19, 31, 35, 50
 mermap samples key, 76
 \mermapset, 17
 \mermapsetmarker, 62
 \mermapsetsupply, 29
 minute value, 25
 \mrcactivatescript, 27
 \mrcapplymap, 35
 \mrcboundmap, 50
 \mrcclipmap, 50
 \mrcdefinemap, 18
 \mrcdrawinfo, 54
 \mrcdrawmap, 50
 \mrcdrawnetwork, 53
 \mrcdraworthodrome, 76
 \mrcdrawscalebar, 58
 \mrcformat, 24
 \mrcformlon, 24
 \mrcgmtotex, 55
 mrclastpos value, 23
 \mrcmap, 35
 mrcmap value, 20
 \mrcmapattribution, 19, 32, 36–49
 \mrcmapattributionprint, 19, 32, 36–49
 \mrcmapeast, 18
 \mrcmapnorth, 18
 \mrcmapscaledominator, 55
 \mrcmapsouth, 18
 \mrcmapwest, 18
 \mrcmarker, 62
 \mrcmarkerangle, 70
 \mrcmarkercategory, 63
 \mrcmarkercontents, 63, 71
 mrcmarkerdraw color, 70
 mrcmarkerfill color, 70, 71
 \mrcmarkerfont, 70, 71
 \mrcmarkerinnerradius, 70
 \mrcmarkerlatitude, 63
 \mrcmarkerlongitude, 63
 \mrcmarkerpictocontents, 63
 \mrcmarkerradius, 70
 \mrcmarkershift, 70
 mrcmarkertext color, 70
 \mrcmarkeruuid, 63
 \mrcmiletotex, 55
 \mrcnewmarkerstyle, 72
 \mrcnewmarkertype, 71
 \mrcnewsupplysource, 49
 mrcnodestyle value, 71
 \mrcNPcs, 22
 \mrcNPdef, 22
 \mrcNPdraworthodrome, 77
 \mrcNPfrompoint, 22
 \mrcNPlat, 22
 \mrcNPlon, 22
 \mrcNPprettyloxodistance, 78
 \mrcNPprettyorthodistance, 78
 mrcpathstyle value, 71
 \mrcpgfpoint, 21
 \mrcpixelheight, 19
 \mrcpixelwidth, 18
 \mrcpoint, 73
 mrcpos value, 23
 \mrcprettyloxodistance, 78
 \mrcprettymapheight, 56
 \mrcprettymapresolution, 56
 \mrcprettymapscale, 56
 \mrcprettymapwidth, 56
 \mrcprettyorthodistance, 78
 \mrcprettytilesize, 56
 mrcroute environment, 73
 mrcroute* environment, 73
 \mrcrouteinput, 73
 \mrcrouteinput*, 73
 \mrcscale, 55
 mrcscalebar value, 58
 \mrcsetapikey, 32
 \mrcstoreloxodistance, 78
 \mrcstoreorthodistance, 78
 \mrcsupplymap, 29
 \mrcutexheight, 55
 \mrcutexokm, 55
 \mrcutexomile, 55
 \mrcutexwidth, 55
 \mrcumlaut, 32
 named flex scale key, 52
 network distance key, 53
 network font key, 53
 network pieces key, 53
 none value, 19, 31, 45
 north value, 31
 northeast value, 31
 northwest value, 31
 openrouteservice value, 37
 openrouteservice mapsurfer value, 37
 opentopomap value, 36
 path value, 50
 pictodrop value, 67, 70, 71
 pictodropring value, 67, 70, 71
 pictoknob value, 68, 70, 71
 pictoknobring value, 69–71
 pin value, 65, 70, 71
 pinflip value, 66, 70, 71
 python key, 27

`reference` value, 7, 28–31, 33
`ringx` value, 69–71

`samples` key, 76
`scalebar/at` key, 59
`scalebar/double` key, 61
`scalebar/height` key, 59
`scalebar/major style` key, 60
`scalebar/minor style` key, 60
`scalebar/north-east-inside` key, 60
`scalebar/north-east-outside` key, 60
`scalebar/north-west-inside` key, 60
`scalebar/north-west-outside` key, 60
`scalebar/partitions` key, 59
`scalebar/placement` key, 60
`scalebar/scale` key, 61
`scalebar/single` key, 61
`scalebar/solid` key, 61
`scalebar/south-east-inside` key, 60
`scalebar/south-east-outside` key, 60
`scalebar/south-west-inside` key, 60
`scalebar/south-west-outside` key, 60
`scalebar/transparent` key, 61
`scalebar/width-in-kilometer` key, 59
`scalebar/width-in-km` key, 59
`scalebar/width-in-meter` key, 59
`scalebar/width-in-mile` key, 59
`scalebar/width-in-yard` key, 59
`second` value, 25
`south` value, 31
`southeast` value, 31
`southwest` value, 31
`stamen terrain` value, 37
`stamen terrain-background` value, 37
`stamen terrain-labels` value, 38
`stamen terrain-lines` value, 38
`stamen toner` value, 38
`stamen toner-background` value, 39
`stamen toner-hybrid` value, 39
`stamen toner-labels` value, 40
`stamen toner-lines` value, 40
`stamen toner-lite` value, 39
`stamen watercolor` value, 40
`supply/add area` key, 30
`supply/align` key, 31
`supply/area` key, 30
`supply/area to reference` key, 30
`supply/attribution` key, 32
`supply/attribution print` key, 32
`supply/basename` key, 32
`supply/dpi` key, 35
`supply/east` key, 30
`supply/flex area fit` key, 34
`supply/flex area scale` key, 33
`supply/flex reference scale` key, 33
`supply/height` key, 31
`supply/latitude` key, 30
`supply/longitude` key, 30
`supply/named position` key, 30
`supply/north` key, 30

`supply/pixel` key, 35
`supply/position` key, 30
`supply/source` key, 36
`supply/south` key, 30
`supply/target` key, 31
`supply/tex height` key, 31
`supply/tex width` key, 31
`supply/type` key, 29
`supply/url` key, 32
`supply/url with api key` key, 32
`supply/west` key, 30
`supply/width` key, 31
`supply/zoom` key, 30

`thunderforest` value, 41–43
`thunderforest landscape` value, 41
`thunderforest mobile-atlas` value, 43
`thunderforest neighbourhood` value, 43
`thunderforest opencyclemap` value, 41
`thunderforest outdoors` value, 42
`thunderforest pioneer` value, 43
`thunderforest spinal-map` value, 41
`thunderforest transport` value, 41
`thunderforest transport-dark` value, 42
`tile size` key, 51
`tiles` value, 19, 31, 50
`topplusopen p10` value, 45
`topplusopen p100` value, 48
`topplusopen p100 grau` value, 48
`topplusopen p10 grau` value, 46
`topplusopen p17.5` value, 46
`topplusopen p17.5 grau` value, 46
`topplusopen p25` value, 47
`topplusopen p250` value, 49
`topplusopen p250 grau` value, 49
`topplusopen p25 grau` value, 47
`topplusopen p5` value, 45
`topplusopen p50` value, 47
`topplusopen p50 grau` value, 48
`topplusopen p5 grau` value, 45
`topplusopen web` value, 44
`topplusopen web grau` value, 44

Values

`areafit`, 9, 28–31, 34
`auto`, 50
`boundaries`, 10, 28–30, 33
`center`, 31
`classic`, 65, 70, 71
`decimal`, 24
`decimal-0`, 24, 25
`decimal-1`, 24
`decimal-2`, 24
`decimal-3`, 25
`decimal-4`, 25
`degree`, 25
`drop`, 66, 70, 71
`dummy`, 36
`east`, 31
`knob`, 68, 70, 71

- map, 63
- markx, 70, 71
- mergedmap, 19, 31, 35, 50
- minute, 25
- mrclastpos, 23
- mrcmap, 20
- mrcnodestyle, 71
- mrcpathstyle, 71
- mrcpos, 23
- mrcscalebar, 58
- none, 19, 31, 45
- north, 31
- northeast, 31
- northwest, 31
- openrouteservice, 37
- openrouteservice mapsurfer, 37
- opentopomap, 36
- path, 50
- pictodrop, 67, 70, 71
- pictodropring, 67, 70, 71
- pictoknob, 68, 70, 71
- pictoknobring, 69–71
- pin, 65, 70, 71
- pinflip, 66, 70, 71
- reference, 7, 28–31, 33
- ringx, 69–71
- second, 25
- south, 31
- southeast, 31
- southwest, 31
- stamen terrain, 37
- stamen terrain-background, 37
- stamen terrain-labels, 38
- stamen terrain-lines, 38
- stamen toner, 38
- stamen toner-background, 39
- stamen toner-hybrid, 39
- stamen toner-labels, 40
- stamen toner-lines, 40
- stamen toner-lite, 39
- stamen watercolor, 40
- thunderforest, 41–43
- thunderforest landscape, 41
- thunderforest mobile-atlas, 43
- thunderforest neighbourhood, 43
- thunderforest opencyclemap, 41
- thunderforest outdoors, 42
- thunderforest pioneer, 43
- thunderforest spinal-map, 42
- thunderforest transport, 41
- thunderforest transport-dark, 42
- tiles, 19, 31, 50
- topplusopen p10, 45
- topplusopen p100, 48
- topplusopen p100 grau, 48
- topplusopen p10 grau, 46
- topplusopen p17.5, 46
- topplusopen p17.5 grau, 46
- topplusopen p25, 47
- topplusopen p250, 49
- topplusopen p250 grau, 49
- topplusopen p25 grau, 47
- topplusopen p5, 45
- topplusopen p50, 47
- topplusopen p50 grau, 48
- topplusopen p5 grau, 45
- topplusopen web, 44
- topplusopen web grau, 44
- vicinity, 63
- west, 31
- wmsmap, 19, 31, 35, 45, 50
- vicinity key, 23
- vicinity value, 63
- west value, 31
- wmsmap value, 19, 31, 35, 45, 50