


Sequencer64 User Manual 0.95.2

Chris Ahlstrom
(ahlstromcj@gmail.com)

August 26, 2018

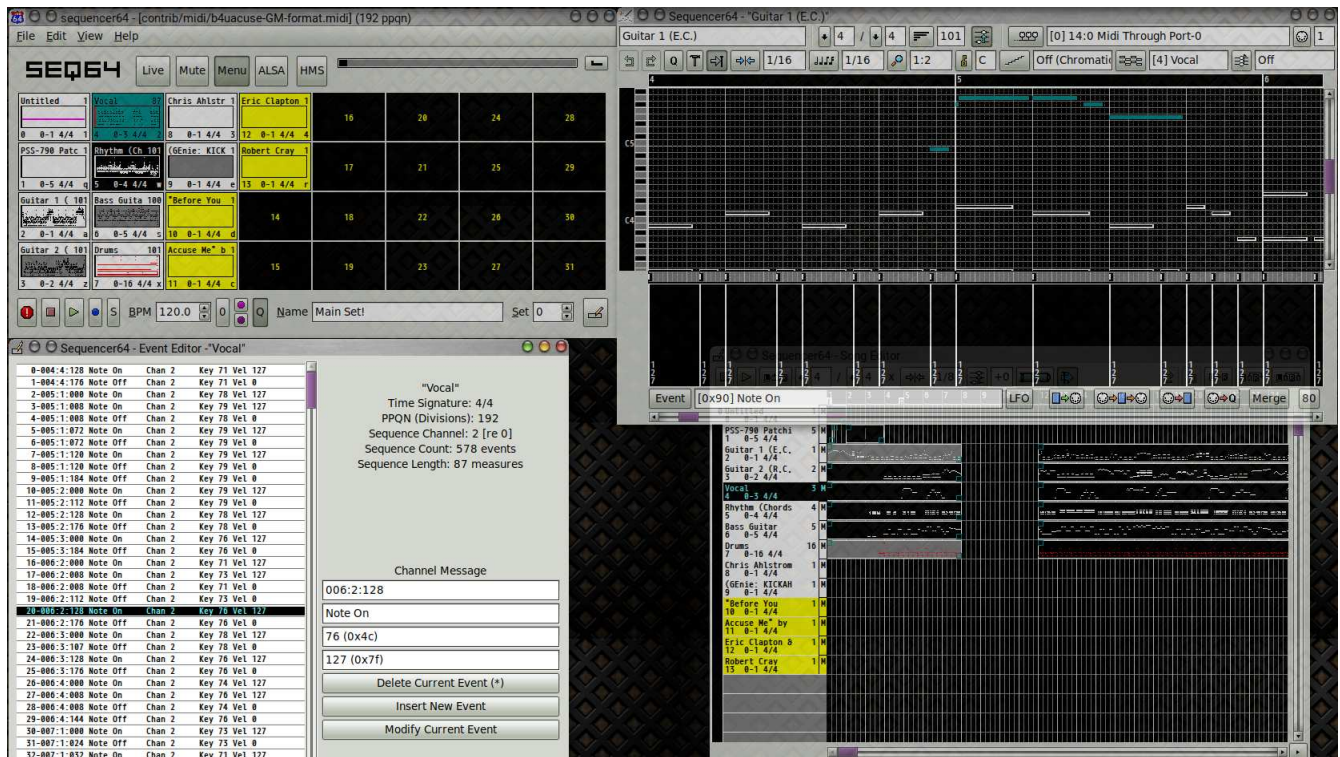

"Night" Mode

Contents

1	Introduction	8
1.1	Sequencer64: What?	9
1.2	Sequencer64: Why?	9
1.3	Improvements	10
1.4	Document Structure	12
1.5	Let's Get Started!	12
2	Menu	14
2.1	Menu / File	14
2.2	Menu / File / New	15
2.2.1	Menu / File / Open	15
2.2.2	Menu / File / Recent MIDI Files	15
2.2.3	Menu / File / Save and Save As	16
2.2.4	Menu / File / Import MIDI	17
2.2.5	Menu / File / Export Song as MIDI	18
2.2.6	Menu / File / Export MIDI Only	21
2.2.7	Menu / File / Options	21
2.2.7.1	Menu / File / Options / MIDI Clock	22
2.2.7.2	Menu / File / Options / MIDI Input	25
2.2.7.3	Menu / File / Options / Keyboard	27
2.2.7.4	Menu / File / Options / Ext Keys	31
2.2.7.5	Menu / File / Options / Mouse	33
2.2.7.6	Menu / File / Options / Jack Sync	35
2.3	Menu / Edit	37
2.4	Menu / View	38
2.5	Menu / Help / About...	39
2.6	Menu / Help / Build Info...	40
3	Patterns Panel	41
3.1	Patterns / Top Panel	41
3.2	Patterns / Main Panel	45
3.2.1	Pattern Slot	46
3.2.2	Pattern	50
3.2.3	Pattern Keys and Click	55
3.2.3.1	Pattern Keys	55
3.2.3.2	Pattern Clicks	59
3.3	Patterns / Bottom Panel	59
3.4	Patterns / Multiple Panels	61
3.5	Patterns / Variable Set Size	62
4	Pattern Editor	63
4.1	Pattern Editor / First Panel	64
4.2	Pattern Editor / Second Panel	65
4.3	Pattern Editor / Piano Roll	73
4.3.1	Pattern Editor / Piano Roll Items	74
4.3.2	Pattern Editor / Event Editing	75

4.3.2.1	Editing Note Events	76
4.3.2.2	Event and Data Panels / Editing Other Events	80
4.3.2.3	Editing Note Events the "Fruity Way"	80
4.4	Pattern Editor / Bottom Panel	80
4.5	Pattern Editor / Common Actions	85
4.5.1	Pattern Editor / Common Actions / Scrolling	85
4.5.2	Pattern Editor / Common Actions / Close	85
5	Song Editor	85
5.1	Song Editor / Top Panel	87
5.2	Song Editor / Arrangement Panel	89
5.2.1	Song Editor / Arrangement Panel / Patterns Column	90
5.2.2	Song Editor / Arrangement Panel / Piano Roll	91
5.2.3	Song Editor / Arrangement Panel / Measures Ruler	93
5.3	Song Editor / Bottom Panel	93
6	Event Editor	93
6.1	Event Editor / Event Frame	96
6.1.1	Event Frame / Data Items	96
6.1.2	Event Frame / Navigation	97
6.2	Event Editor / Info Panel	97
6.3	Event Editor / Edit Fields	97
6.4	Event Editor / Bottom Buttons	99
7	Sequencer64 Keyboard and Mouse Actions	99
7.1	Main Window	99
7.2	Performance Editor Window	100
7.2.1	Performance Editor Piano Roll	100
7.2.2	Performance Editor Time Section	102
7.2.3	Performance Editor Names Section	103
7.3	Pattern Editor	103
7.3.1	Pattern Editor Piano Roll	103
7.3.2	Pattern Editor Event Panel	105
7.3.3	Pattern Editor Data Panel	105
7.3.4	Pattern Editor Virtual Keyboard	105
7.4	Event Editor	105
8	Sequencer64 Meta Event / SysEx Support	105
8.1	"usr" BPM Display Settings	106
8.2	Composite Display of Tempos	106
8.3	Tempo in the Main Window	107
9	Sequencer64 "rc" Configuration File	109
9.1	Sequencer64 "rc" File / MIDI Control Section	109
9.1.1	Sequencer64 "rc" File / MIDI Control Pattern Group	114
9.1.2	Sequencer64 "rc" File / MIDI Control Mute In Group	116
9.1.3	Sequencer64 "rc" File / MIDI Control Automation Group	116
9.2	Sequencer64 "rc" File / MIDI Control Extended Automation Section	116
9.3	Sequencer64 "rc" File / Mute-Group Section	119

9.4	Sequencer64 "rc" File / MIDI-Clock Section	119
9.5	Sequencer64 "rc" File / MIDI-Meta-Events Section	121
9.6	Sequencer64 "rc" File / Keyboard Control Section	121
9.7	Sequencer64 "rc" File / Keyboard Group Section	122
9.8	Sequencer64 "rc" File / JACK Transport	123
9.9	Sequencer64 "rc" File / Other Sections	124
10	Sequencer64 "usr" Configuration File	128
10.1	Sequencer64 "usr" File / MIDI Bus Definitions	131
10.2	Sequencer64 "usr" File / MIDI Instrument Definitions	134
10.3	Sequencer64 "usr" File / User Interface Settings	136
10.4	Sequencer64 "usr" File / User MIDI Settings	140
10.5	Sequencer64 "usr" File / User Options	142
10.6	Sequencer64 "usr" File / Device and Control Names	143
11	Sequencer64 Man Page	145
12	Sequencer64 Qt5/PortMidi	149
12.1	The Qt 5 User Interface	150
12.1.1	Qt 5 Live Tab	151
12.1.2	Qt 5 Song Tab	152
12.1.3	Qt 5 Edit Tab	153
12.1.4	Qt 5 Events Tab	154
12.1.5	Qt 5 Edit / Preferences	155
12.2	Sequencer64 Windows Setup	155
12.2.1	Sequencer64 Windows Issues	155
12.2.2	Sequencer64 Windows Configuration Files	156
13	Concepts	157
13.1	Concepts / Terms	158
13.1.1	Concepts / Terms / armed	158
13.1.2	Concepts / Terms / buss (bus)	158
13.1.3	Concepts / Terms / export	158
13.1.4	Concepts / Terms / group	158
13.1.5	Concepts / Terms / loop	158
13.1.6	Concepts / Terms / measures ruler	159
13.1.7	Concepts / Terms / event strip	159
13.1.8	Concepts / Terms / muted	159
13.1.9	Concepts / Terms / MIDI clock	159
13.1.10	Concepts / Terms / pattern	159
13.1.11	Concepts / Terms / performance	159
13.1.12	Concepts / Terms / port	159
13.1.13	Concepts / Terms / pulses per quarter note	160
13.1.14	Concepts / Terms / queue mode	160
13.1.15	Concepts / Terms / replace	160
13.1.16	Concepts / Terms / screen set	160
13.1.17	Concepts / Terms / bank	160
13.1.18	Concepts / Terms / sequence	160

13.1.19 Concepts / Terms / snapshot	161
13.1.20 Concepts / Terms / song	161
13.1.21 Concepts / Terms / trigger	161
13.2 Concepts / Sound Subsystems	161
13.2.1 Concepts / Sound Subsystems / ALSA	161
13.2.2 Concepts / Sound Subsystems / PortMIDI	161
13.2.3 Concepts / Sound Subsystems / JACK	161
14 Building Sequencer64 From Source Code	162
14.1 INSTALL	162
14.2 Options for Sequencer64 Features	163
14.2.1 Using More "configure" Options	163
14.2.2 Manually-defined Macros in the Code	165
14.3 Sequencer64 Build Dependencies	169
15 MIDI Format and Other MIDI Notes	170
15.1 Standard MIDI Format 0	170
15.2 Legacy Proprietary Track Format	172
15.3 MIDI Information	175
15.3.1 MIDI Variable-Length Value	175
15.3.2 MIDI Track Chunk	175
15.3.3 MIDI Meta Events	176
15.4 More MIDI Information	177
15.4.1 MIDI File Header, MThd	177
15.4.2 MIDI Track, MTrk	177
15.4.3 Channel Events	178
15.4.4 Meta Events Revisited	178
15.5 Meta Events	179
15.5.1 Sequence Number (0x00)	180
15.5.2 Track/Sequence Name (0x03)	180
15.5.3 End of Track (0x2F)	180
15.5.4 Set Tempo Event (0x51)	180
15.5.5 Time Signature Event (0x58)	181
15.5.6 SysEx Event (0xF0)	182
15.5.7 Sequencer Specific (0x7F)	182
15.5.8 Non-Specific End of Sequence	183
16 Sequencer64 JACK Support	183
16.1 Sequencer64 JACK Transport	183
16.2 Sequencer64 Native JACK MIDI	184
16.2.1 Sequencer64 JACK MIDI Output	185
16.2.2 Sequencer64 JACK MIDI Input	187
16.2.3 Sequencer64 JACK MIDI Virtual Ports	187
16.2.4 Sequencer64 JACK MIDI and a2jmidid	188
17 Kudos	189
18 Summary	190

19 References**190****List of Figures**

1	Sequencer64 Main Screen, ALSA MIDI	13
2	Sequencer64 File Menu Items	14
3	File / Open	15
4	File / Save As	16
5	File / Import MIDI	18
6	File / Export Song as MIDI	19
7	Unexportable MIDI File	20
8	Composite View of an Exportable Song	20
9	Composite View of Exported Song	21
10	File / Options Tabs for Version 0.9.18+	22
11	MIDI Clock, Manual Option On, Condensed View	23
12	MIDI Clock, Manual Option Off (ALSA View)	25
13	MIDI Input, Manual Ports Off (Condensed View)	26
14	MIDI Input, -a Option (Condensed View)	26
15	File / Options / Keyboard	28
16	Pattern Window with Numbering	29
17	File / Options / Ext Keys (Condensed View)	31
18	File / Options / Ext Keys (Disabled)	32
19	File / Options / Mouse (Condensed View)	33
20	File / Options / JACK	35
21	JACK Connection Button	37
22	Edit Menu	37
23	Dual Song Editor Entries in View Menu	39
24	Help / About	39
25	Help Credits	40
26	Help Documentation	40
27	Help / Build Info	41
28	Patterns Panel, New Top Panel Items	42
29	Group Learn Confirmation Prompt	43
30	Group Learn Failure Prompt (Shift Key)	44
31	Group Learn Keys With Larger Set Size	44
32	Group Learn Limit Prompt	44
33	Patterns Panel, Main Panel Items	46
34	Various Status of Pattern Slots	46
35	Sequence/Pattern Color Menu	47
36	Sequence/Pattern Coloration	48
37	Empty Pattern, Right-Click Menu	48
38	Currently-Edited Pattern, Unarmed	49
39	Currently-Edited Pattern, Armed	50
40	Existing Pattern, Right-Click Menus	52
41	Existing Pattern, Right-Click Menu Without Edit Entries	53
42	Existing Pattern, Right-Click Menu, Song	53
43	Existing Pattern, Right-Click Menu, MIDI Output Busses	54

44	Existing Pattern, Right-Click Menu, MIDI Bus Ports	55
45	Patterns Panel, Shift-Key Pattern Toggle	55
46	Pattern Coloration when Queued	56
47	Queued-Replace (Queued-Solo) In Action	58
48	Patterns Panel, Bottom Panel Items	59
49	Patterns Panel, Pause Button	60
50	Patterns Panel, BPM Precisions	60
51	Patterns Panel, with Multiple Panels	61
52	Patterns Panel, 8 x 8 Layout	62
53	Pattern Edit Window	63
54	Pattern Editor, First Panel Items	64
55	Pattern Editor, Second Panel Items	66
56	Tools, Context Menu	66
57	Tools, Transpose Selected Values	68
58	Tools, Two "Transpose" Menus	68
59	Tools, Harmonic Transpose Selected Values	69
60	Scales Currently Supported in Sequencer64	71
61	C Major Scale Masking	71
62	Sample Background Sequence Values	72
63	Background Sequence Notes	72
64	Chord Generation Menu	73
65	Pattern Editor, Piano Roll Items	74
66	Pattern Editor, Virtual Keyboard Number and Note Views	75
67	Piano Roll, Paste-Box for Cut Notes	79
68	Piano Roll, Selected Notes and Events	79
69	Pattern Editor, Bottom Panel Items	81
70	Pattern Editor, Event Button Context Menu	81
71	Pattern Editor, LFO Support	83
72	Pattern Recording Volume Menu	84
73	Song Editor Window	86
74	Song Editor Window, New Features	87
75	Song Editor Window, Transpose Song	87
76	Song Editor / Top Panel Items	88
77	Song Editor Arrangement Panel, Annotated	90
78	Song Editor for Non-Transposable Patterns	90
79	Event Editor Window	95
80	Various Tempo Displays	107
81	Tempo Recording Controls	108
82	Stop/Pause/Start ALSA Test Setup	118
83	Sequencer64 Composite View of Native Devices	129
84	Busses and Instruments in the "usr" File	131
85	Clocks View, -m (-manual-alsa-ports)	133
86	Inputs View with -m (-manual-alsa-ports) Option	133
87	Clocks View, -m (-manual-alsa-ports) and -R (-hide-alsa-ports)	133
88	Clocks View, -r (-reveal-alsa-ports)	133
89	Inputs View with -r (-reveal-alsa-ports) Option	134
90	Clocks View with -R (-hide-alsa-ports) Option	134
91	Inputs View with -R (-hide-alsa-ports) Option	134

92	Sequencer64 Composite View of Non-Native Devices	144
93	The MIDI Bus Menu for a Specific Pattern	145
94	Qt 5 Main Window, Linux	151
95	Qt 5 Main Window, Windows 10	151
96	Qt 5 Song Window, Linux	152
97	Qt 5 Edit Window, Linux	153
98	Qt 5 Events Window	154
99	Qt 5 Clock Preferences, Windows	155
100	Pattern Window Built for White Grid with Numbering	166
101	Pattern Window Built for Black Grid with Numbering	167
102	Sequence Pattern Editor Alternate Look	168
103	Song Editor Alternate Look	169
104	Imported SMF 0 MIDI Song	171
105	SMF 0 MIDI Song in the Song Editor	172
106	JACK MIDI Ports and Auto-Connect	185
107	ALSA MIDI Ports	186
108	JACK MIDI Ports in Seq64	186
109	JACK MIDI Input Ports	187
110	JACK MIDI Manual Ports	188
111	JACK MIDI a2jmidid Ports	189

List of Tables

1	Main Window Support	100
2	Performance Window Piano Roll	101
3	Performance Editor Time Section	102
4	Performance Editor Names Section	103
5	Pattern Editor Piano Roll	104
6	Pattern Editor Virtual Keyboard	105
7	SeqSpec Items in Normal Tracks	173
8	SeqSpec Items in Legacy Proprietary Track	174
9	SeqSpec Items in New Proprietary Track	175
10	MIDI Meta Event Types	176
11	Application Support for MIDI Files	177

1 Introduction

This document describes *Sequencer64* [29], through version 0.95.2, the latest commit from the **master** branch. If one is impatient to get started mastering *Sequencer64*, then proceed to section 1.5 "Let's Get Started!" on page 12. The following projects support *Sequencer64*:

- <https://github.com/ahlstromcj/sequencer64.git>.
- <https://github.com/ahlstromcj/sequencer64-doc.git>.
- <https://github.com/ahlstromcj/sequencer64-packages.git>.

Sequencer64 has added native JACK MIDI support, and it fixes some bugs in JACK transport, MIDI clocking, and JACK Master mode (with code from the *SooperLooper* and *Seq32* projects). However, as user *stazed* notes on GitHub, there is more that can be done (and he has done much with his *seq32* [26] project).

Many new features make song editing faster. There is now a Pause button/keystroke. More editing and navigation can be done using keystrokes. The armed/mute status of all of the *other* active patterns can be toggled. There are zoom keys for the editors, current-sequence highlighting, important bug fixes, some optimization, and much more.

With version 0.95.0, *Sequencer64* now supports the *Microsoft Windows* operating system. This support was achieved by incorporating a modified and stripped-down version of PortMidi and by adopting and extending the *Qt 5* user-interface of the *Kepler34* project ([9]). The *Qt 5* interface has been greatly improved in version 0.95.2, but there's still a small amount of catching up to do. We intend to make the *Qt 5* interface comparable to the *Gtkmm-2.4* interface in the 0.95 series, develop the two versions in parallel for awhile, and ultimately standardize on *Qt 5*. See section 12 "Sequencer64 Qt5/PortMidi" on page 149, right away, if *Qt 5* and *Windows* support excites you. Please note that support for *Mac OSX* should be almost automatic, but we need help on that support, since we do not have a *Mac*.

We have many contributors to acknowledge. Please see section 17 "Kudos" on page 189.

1.1 Sequencer64: What?

Sequencer64 is a reboot of *Seq24*, a live-looping sequencer with an interface more like a hardware sequencer than the typical software MIDI sequencer. *Seq24* was a very active project, with a number of contributors, who created patches, additional functionality, and even ports to Windows. We searched for these updates, and incorporated them into *Sequencer64* where feasible. There are still some things to be done, such as adding playlists and a way to access them through MIDI control.

Sequencer64 is not a synthesizer. It requires a hardware synthesizer, or a software synthesizer such as Timidity [33], FluidSynth [6], ZynAddSubFX [41], and Yoshimi [37] [38]. See [11] for a long list of "Linux" synthesizers).

Sequencer64, like *Seq24*, works a bit like an *Alesis SR16* drum machine, which, for some, is a very intuitive and fast way to do MIDI. If one has worked with trackers like *SoundTracker* and *ShakeTracker*, then "you are a tracker guy and it gonna go fast". With *Sequencer64*, one creates several patterns, and then combines them. They can be laid out as a song, and exported to a standard MIDI file.

Unfortunately, *Seq24* spent some time in limbo (2010 was the last major update, with a recent update to fix a MIDI clock issue). There are a number of forks for it on *GitHub*, and some conversions to code in other languages, and some patches. There is also a fairly extensive port to Windows. So, why would we bother creating yet another fork of *Seq24*?

1.2 Sequencer64: Why?

The first reason to reboot *Seq24* is consolidation of many of the features and fixes that it has accumulated in various forks over the years. Also, although "feature-complete", additional features would be useful.

Secondly, *Seq24* is a kind of "vi" of MIDI editing... spare, lean, and powerful. It deserves to be a living project. Without *Seq24* and its authors, *Sequencer64* would never have come into being. And we owe the **Qt** support to *Kepler34*. [9].

1.3 Improvements

The following improvements have been made to *Seq24* for *Sequencer64*.

- An important update is native JACK MIDI support! At last!
- Tempo events are now supported, are recordable, and are editable. The first track (or a configurable track) serves as a "tempo track".
- A "Tap" button sets the BPM by tapping a button or a key.
- The user interface can show more than one set at once, or more patterns in a single set. For example, 8 rows by 8 columns, fulfilling the promise of the project name, *Sequencer64*.
- The *event editor* dialog provides viewing and editing of MIDI events as text. This editor is basic, but useful.
- *Sequencer64* reads SMF 0 MIDI files, splitting the file into patterns based on channel number.
- Additional MIDI controls, such as coarse versus fine BPM control.
- Some features have been ported from *Stazed's Seq32* [26] project; they can be disabled at configure/build time (for those who like programming in C++), if desired.
 - Chord-generation.
 - Pattern-transposing.
 - MIDI song export, which allows a song/performance to be exported into a MIDI file without *Sequencer64* loops, so that the performance can be played in a standard MIDI sequencer.
 - Extended undo/redo support, and more comprehensive detection of changes to the song.
 - The ability to split triggers at the nearest snap, instead of splitting them in half.
 - Editing the amplitude of data events using a simple low-frequency oscillator (LFO).
 - Enhanced JACK transport support.
 - *Seq32* features still pending:
 - * Diverting multi-channel recorded MIDI so that each channel is stored in the sequence/pattern configured for that channel
 - * Randomizing MIDI events.
 - * Selection extensions such as selecting odd/even notes, and handles on data events.
- An optional second song editor window, to have a view of two different parts of a large song while arranging it.
- Set Tempo and Time Signature events are now processed, incorporated into the user-interface, and are saved as standard MIDI data. Support for System Exclusive events is improving.
- The scale, key, and background sequence settings are now saved to the *Sequencer64* MIDI file, either globally or per-sequence.
- Each sequence can be colored differently, if desired. The color from the color palette is saved as part of the pattern data for that sequence.
- In the sequence/pattern and song editors, the piano roll now scrolls to keep up with the progress bar for long patterns.
- Additional mouse and keystroke support in the pattern and song editor windows:
 - Usage of Page Up, Page Down, and Shift Page Up, Shift Page Down, to move vertically and horizontally in the pattern and song windows.
 - Moving selected notes or triggers using the arrow keys.
 - Pasting selected notes (and other events) using the arrow and Enter keys.
 - Additional keystroke support for entering and exiting "paint" mode.
 - Usage of the Mod4 (Super, Windows) key to keep editing (painting) mode enabled after releasing the right mouse button; useful with some "modern" crappy uni-touchpads.

- Shift-left-click on a pattern slot (pattern editor), or on the pattern name or "M" (mute) label (song editor) to toggle the status of all of the other active slots. Useful for listening to a single track by itself.
- Right-click on a the virtual keyboard in the pattern editor toggles between showing letters/octaves (e.g. "C4") versus the MIDI note numbers.
- The "user" configuration can now be written to disk (after the first run) with the `--user-save` option, and it has many new settings. It offers the long-standing feature of customizable buss, instrument, and controller information, plus some customizations of the user-interface, such as font, display of the main window's pattern grid, colored and thicker progress bars, modification of the default 40 millisecond window redraw rate, changes in the row and column sizes of a set, and showing multiple sets in the main window.
- Support for mapping MIDI events to a single MIDI buss for testing or simple use cases.
- Support for handling PPQN values other than 192, and for using the PPQN defined by the MIDI file, if desired.
- Small improvements in appearance:
 - Support for showing empty (having only meta events) sequences in a highlight color (yellow).
 - Support for highlighting the currently-focussed pattern editor window, in black-on-cyan if not armed, and in cyan-on-black if armed. The highlighting appears in both the pattern and song editors.
 - Sequences that are shorter than a quarter note are now padded to one full measure, for smoother scrolling on the patterns panel.
 - Modification of the colors of the scale and background sequence in the sequence editor to make it easier to see them all.
 - A new font, enabled at run time, that is bolder and has an anti-aliased look.
 - Clean, solid lines to replace the dotted lines in the piano-roll grids.
 - Additional zoom values have been added to support the display of high PPQN sequences.
 - An "inverse" or "night" color mode has been added for those who find the glare of all-white windows to be uncomfortable.
- Consolidated various patches in forks of the *Seq24* project found by searching the web. Fixes to bugs found while refactoring *Seq24* were also made.
- Recording of performance changes into the Song Editor.
- More musical scales (harmonic minor, melodic minor, whole tone, etc.) have been added.
- A pause feature, added to ALSA-mode playback, includes a pause keystroke (".") and a pause button.
- A multiple-set main-window build and run-time option can now show more than one set in the main window.
- Internal improvements.
 - Provided a new, more MIDI-compliant output format for the MIDI files. The old format can still be read, and, with a "legacy" option, be written.
 - Changed the handling of the MIDI event container, which greatly speeds up the loading of a MIDI file.
 - Note-transpose now also works on aftertouch events.
 - Non-note events are now copied, moved, or pasted, even if not visible, in the pattern editor.
 - The code was reformatted using *astyle* and personal preferences, and refactored into smaller modules.
 - Much documentation was added to the code as we figured out how it worked. Generation of Doxygen output (including a PDF file) provides a developer's reference manual.

- Debian packaging was incorporated into the project to make it easier to install without source code. Bootstrapping and packing scripts were added so that other developers can rebuild the project from scratch.
- New minor features.
 - The size of the Patterns Panel (main window) is now locked (only for the Gtkmm-2.4 version)..
 - A panic button.
 - Support for LASH is a run-time or a build option.
 - Support for reading and writing configuration files from the user's `$HOME/.config/sequencer64` directory, or, optionally, other directories or files.

We have created a build for Windows, using MingW and QtCreator, a fairly significant task. We've also been asked to incorporate support for a scripting language, for OSC (Open Sound Control), and for NSM (the Non Session Manager). Still thinking about those.

One more note. *Sequencer64* is extremely customizable, and its features can be configured by defining macro names in the source code, by enabling/disabling options at build-configuration time, and by many new command-line arguments. We cannot show all permutations of settings in this document, so don't be surprised if some screenshots don't quite match one's setup.

1.4 Document Structure

The structure of this document follows the user-interface of *Sequencer64*. The sections are provided in the order their contents appear in the user interface of *Sequencer64*. To help the reader jump around this document, it provides multiple links, references, and index entries.

Usage tips for each of the functions provided in *Sequencer64* are sprinkled throughout this document. Each tip occurs in a section beginning with "**Tip:**". Each tip is provided with an entry in the index, under the main topic "tips".

Bug notes for some of the oddities found in *Sequencer64* are sprinkled throughout this document. Each bug occurs in a sentence beginning with "**Bug:**". Each bug is provided with an entry in the index, under the main topic "bugs". These bugs are items that we will try to fix as time goes on.

"*To-do*" items are also present, again in the same vein. Each to-do occurs in a sentence beginning with "**TODO:**". This document currently has a lot of them!

"*New*" items are also present, in the same vein. New features (post version 0.9.2) will be noted with the tag "**New:**".

1.5 Let's Get Started!

Let us run *Sequencer64*. The first thing to do is make sure one has no other sound application running (unless one wants to risk blocking *Sequencer64* or hearing two sounds simultaneously, depending on one's operating system, sound card and ALSA setup). Then start *Sequencer64* so that it uses JACK for MIDI. (On *Windows* just run it; the executable is `qpseq64.exe`. Provide a default MIDI file so that all elements of the user interface can come into play. Also use the "&" character so that we get back to the command-line prompt. Finally, on our system the main synthesizer (*Yoshimi*) comes up on MIDI buss 5, so we add an option to remap all events to that buss:

```
$ seq64 --jack-midi --bus 5 contrib/midi/b4uacuse-seq24.midi &
C:\> qpseq64 --bus 1 contrib/midi/b4uacuse-seq24.midi
```

If the `--alsa` option is used instead of `--jack-midi`, then the "JACK" button will show "ALSA" instead (Linux 'rtmidi' build only).

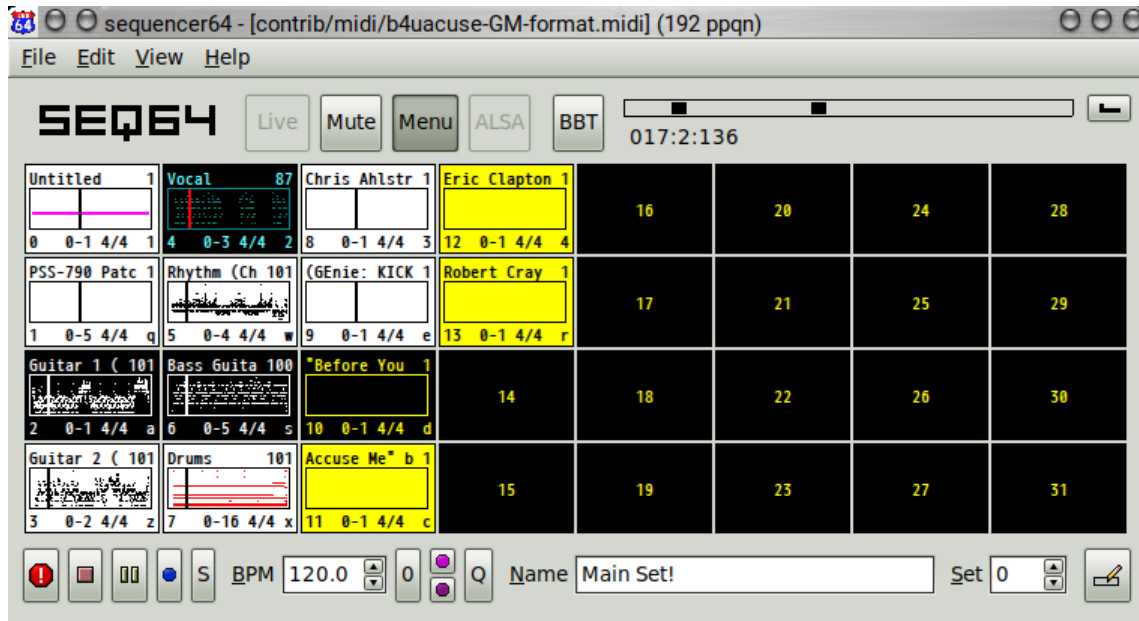


Figure 1: Sequencer64 Main Screen, ALSA MIDI

Then the *Sequencer64* main window appears, as shown in figure 1 "Sequencer64 Main Screen, ALSA MIDI" on page 13. It has some differences from the *Seq24* main window (and even more differences for the *Windows/Qt* version: the highlighting of empty patterns in yellow, a different font, additional control buttons, and much more that is not shown. Most of these items can be configured via the "rc" and "user" configuration files or command-line options.

There are many new front-panel items in *Sequencer64*:

- Top panel control buttons:
 - Toggle and show the status of "Live" mode versus "Song" mode.
 - Mute/show the mute status of all tracks.
 - Enable/disable the menu bar and show its status.
 - Set/show JACK "Slave" transport, JACK "Master" transport, "ALSA" mode, or "JACK" (native JACK) mode.
 - Set the kind of time display, between "bars:beat:ticks" and "hours:minute:seconds".
- Current time in bars, beats, and ticks.
- Panic button, to stop all tracks and turn off all notes.
- Start, Stop, and Pause.
- Song recording records all muting changes to the Song Editor.
- Song-recording snap, the **S** button.
- Tap Tempo, the **0** (zero) button.
- Log Tempo, which inserts the current tempo into the tempo track as an event.

- Tempo recording, which inserts all tempo changes as tempo events.
- Keep-queue toggling and status.

Many (but not all) of these buttons have configurable keystrokes as well. See section 3.3 "Patterns / Bottom Panel" on page 59 for more information.

2 Menu

The *Sequencer64* menu, as seen at the top of figure 1 "Sequencer64 Main Screen, ALSA MIDI" on page 13, is fairly simple, but it is important to understand the structure of the menu entries.

2.1 Menu / File

The **File** menu is used to save and load standard MIDI files. *Sequencer64* will handle any Format 0 or Format 1 standard files that other sequencers export. The *Sequencer64* menu entry contains the sub-items shown in figure 2 "Sequencer64 File Menu Items" on page 14. The next few sub-sections discuss the sub-items in the *File* sub-menu.

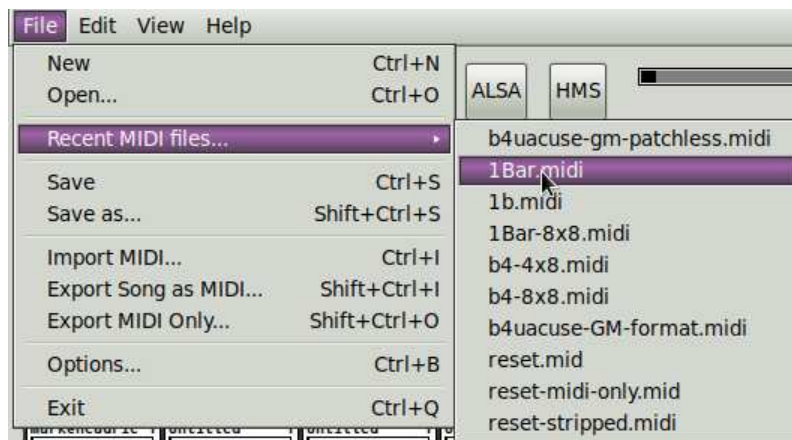


Figure 2: Sequencer64 File Menu Items

1. New
2. Open...
3. Recent MIDI files...
4. Save
5. Save As...
6. Import MIDI...
7. Export Song as MIDI...
8. Export MIDI Only...
9. Options...
10. Exit

2.2 Menu / File / New

The **New** menu entry clears out any current song and patterns, allowing one to create new ones from scratch. If unsaved changes are pending, the user will be prompted to save the changes. Prompting for changes is more comprehensive than *Seq24*.

2.2.1 Menu / File / Open

The **Open** menu entry opens a song (MIDI file) that had been saved previously. It opens up a standard GTKmm-2.4 or Qt 5 file dialog:

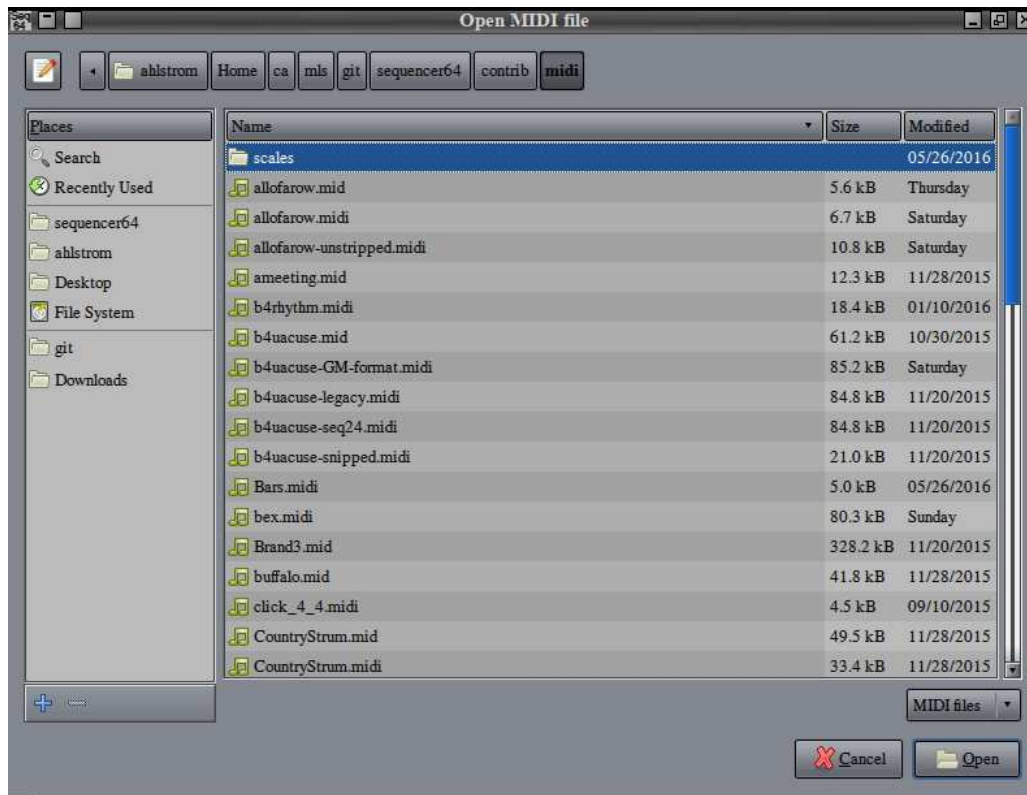


Figure 3: File / Open

This dialog lets one type a file-name, highlighting the first file (if any) that matches the characters typed so far. If unsaved changes are pending from the currently-open MIDI file, the user will be prompted to save the changes. When in doubt, save! Keep backups of your tunes!

Note that *Sequencer64* can also open regular MIDI files. As of version 0.94.3, it will read and store various MIDI Meta events that were not directly supported before. In addition, the Tempo and Time Signature events are now integral parts of *Sequencer64* handling.

2.2.2 Menu / File / Recent MIDI Files

Provides a list of the last few MIDI files that were created or opened. This list is saved in the `[recent-files]` section of the "rc" configuration file. In the menu, only the last part of the file-name is shown, but in the

"rc" configuration file, the full path to the file-name is stored. This path is in "UNIX" format, using the forward slash, or solidus, as the path separator, even in *Windows*. Only unique entries are included in the recent-files list. The limit is 10 recent-file entries. This is another feature from *Kepler34* ([9]). Here is an example from an "rc" file:

```
[recent-files]
# Holds a list of the last few recently-loaded MIDI files.
3
/home/chris/git/sequencer64/data/b4ucuse-gm-patchless.midi
/home/chris/git/sequencer64/contrib/midi/colours.midi
/home/chris/git/sequencer64/Julian-data/TestBeeps.midi
```

2.2.3 Menu / File / Save and Save As

The **Save** menu entry saves the song under its current file-name. If there is no current file-name, then it opens up a standard file dialog to name and save the file.

The **Save As** menu entry saves a song under a different name. It opens up the following standard file dialog, very similar to the **File Open** dialog, with an additional **Name** text-edit field.

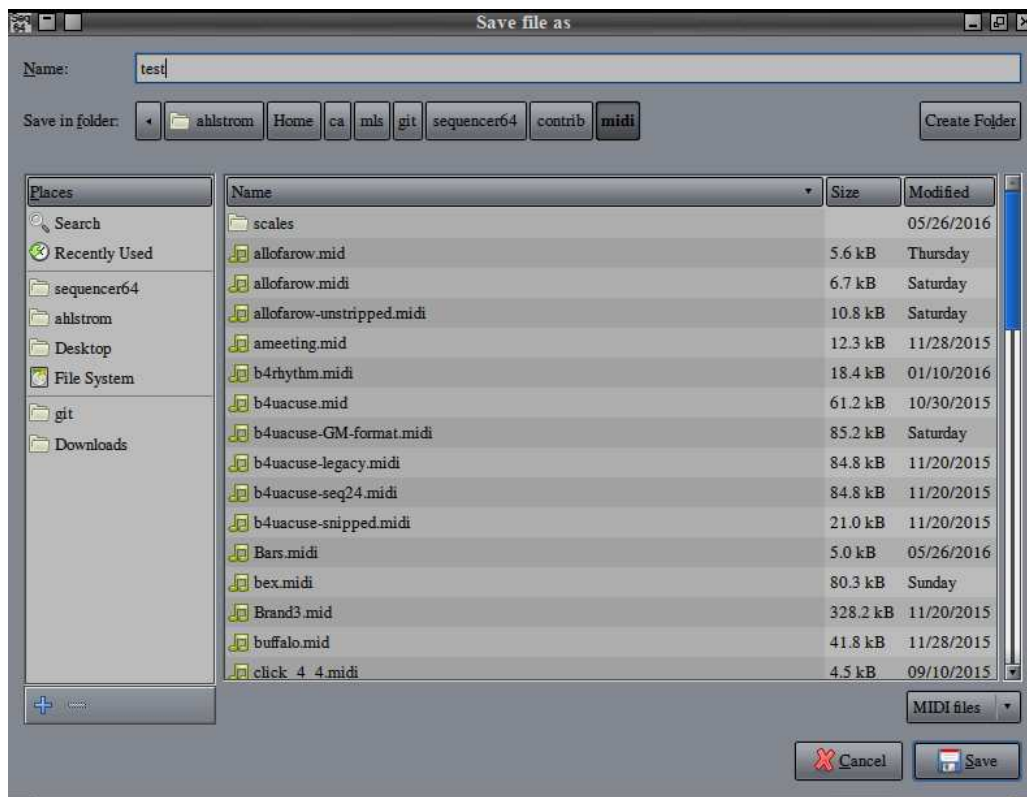


Figure 4: File / Save As

To save a new file, or to save the current existing file to a new name, enter the name in the name field, without an extension. *Sequencer64* will append a `.midi` extension to the filename. The file will be saved in a format that the Linux `file` command will tag as something like:

myfile.midi: Standard MIDI data (format 1) using 16 tracks at 1/192

It looks like a simple MIDI file, and yet, if one re-opens it in *Sequencer64*, one sees that all of the labelling, pattern information, and song layout has been preserved in this file. Even the pattern layout (arrangement), as discussed in section 5.2.2 "Song Editor / Arrangement Panel / Piano Roll" on page 91, have been saved. (But the L and R marker positions are not saved.)

Compare the sizes of the original project MIDI file and the output MIDI file after *Sequencer64* saves them are different. The reason is that, after the last track in the file, a number of sequencer-specific (SeqSpec) items are saved, to preserve this extra information. In legacy mode, *Sequencer64* saves this information in the same format as *Seq24*. Otherwise, it saves it in an even more MIDI-compatible format. There is also an option to strip this extra information if it is empty.

New: In its normal mode, *Sequencer64* saves this information by marking each SeqSpec section as vendor-specific information, and marking this section as a regular MIDI track. The legacy and new formats of the final "track" are explained in section 15.2 "Legacy Proprietary Track Format" on page 172.

New: Note that meta events are now partially handled by *Sequencer64*. Meta events Set Tempo, FF 51 03 tt tt tt, and Time Signature, FF 58 04 nn dd cc bb, are now fully supported. Other Meta events, such as Meta FF 20 01 cc (MIDI channel cc), and Meta FF 21 01 pp (MIDI port pp), are now read in as events, and are saved back when the file is saved. They cannot be edited in *Sequencer64*, but at least they are not lost. Please note that the channel and port meta events mentioned above are also considered *obsolete*.

2.2.4 Menu / File / Import MIDI

The **Import** menu entry allows one to import an SMF 0 or SMF 1 MIDI file into one or more patterns, one pattern per track in the MIDI file. Even long tracks, that aren't short loops, are read in properly. The difference from **Open** is that the destination set for the import can be specified, and the existing data is preserved, except for the data in the destination set. If the imported file is a *Sequencer64* file, it's proprietary sections will *not* be imported, in order to preserve the performance setup.

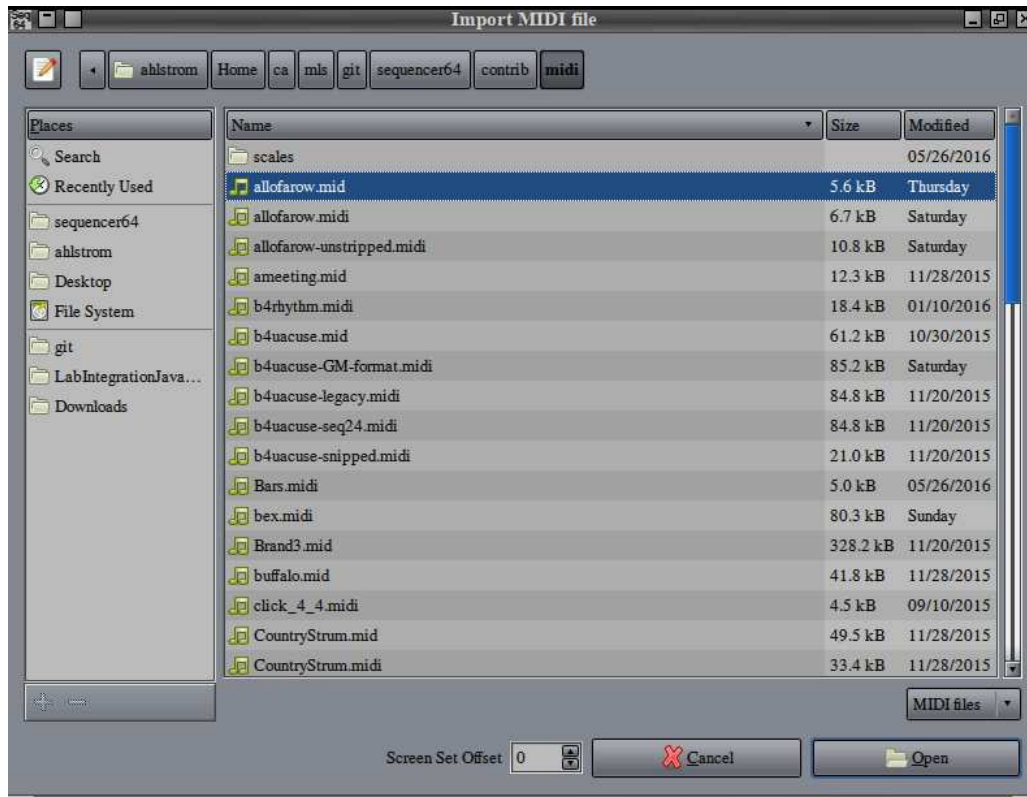


Figure 5: File / Import MIDI

When imported, each track, whether a music track or an information track, is entered into its own loop/pattern box. The import operation can handle reasonably complex files, such as the `contrib/b4ucuse.mid` file, which contains a transcription of an Eric Clapton / Robert Cray tune made over 20 years ago.

Note the additional file-dialog field, **Select Screen Offset**. This setting is actually a set offset. It lets one place the imported data into a screen-set other than the first screen-set (screen-set 0). This field is not editable. It requires using the scroll button to move the screen set offset up or down in value. The legal values range from 0 to 31.

When the file is imported, the sequence number for each track read in is adjusted to put the track in the desired screen-set. The import can place the imported data into any of the 32 available screen-sets. Quite large songs can be built up by importing patterns from other MIDI files.

The import operation also handles SMF 0 MIDI files. It parcels out the SMF 0 into sequences/patterns for each of the 16 MIDI channels. It also puts all of the MIDI data into the 17th pattern (pattern 16), in case it is needed. Note that this slot is used no matter which screen-set one imports the file into. Bug, or feature?

2.2.5 Menu / File / Export Song as MIDI

Thanks to the *Seq32* project, the ability to export songs to MIDI format has been added. "But wait!", you say, "Sequencer64 already saves to a MIDI-compatible format. Why the need for an Export operation?" Well, the **Export Song as MIDI** operation modifies the song in the following ways:

- Only tracks (sequences, loops, or patterns) that are "exportable" are written. To be exportable, a track must be unmuted, and it must have triggers (see section 13.1.21 "Concepts / Terms / trigger" on page 161). That is, the track must have a layout entry in the **Song Editor**. A track need not have any playable data to be exported.
- All of the triggers for a given track are consolidated. Each trigger is used to generate the events, including repeats and offsets play of the track information. If there is a gap in the layout (e.g. due to the **Expand** operation in the Song Editor), then there is a corresponding gap in the events that are played. The result is one consolidated trigger that reconstructs the original playback layout. This trigger is not needed (or even usable) in any non-Seq24-based MIDI sequencer; the events themselves are sufficient to play the performance exactly. But the trigger is useful for further editing of the song/performance, as will be seen later, so it is kept (in a **SeqSpec** section).
- All the tracks that are exported are consolidated, so that any empty pattern slots between them are removed. No matter what set the original track was in, it ends up in the first set.
- Other additions, such as time signature and tempo meta events, are written in the same manner as for a normal **File / Save** operation.

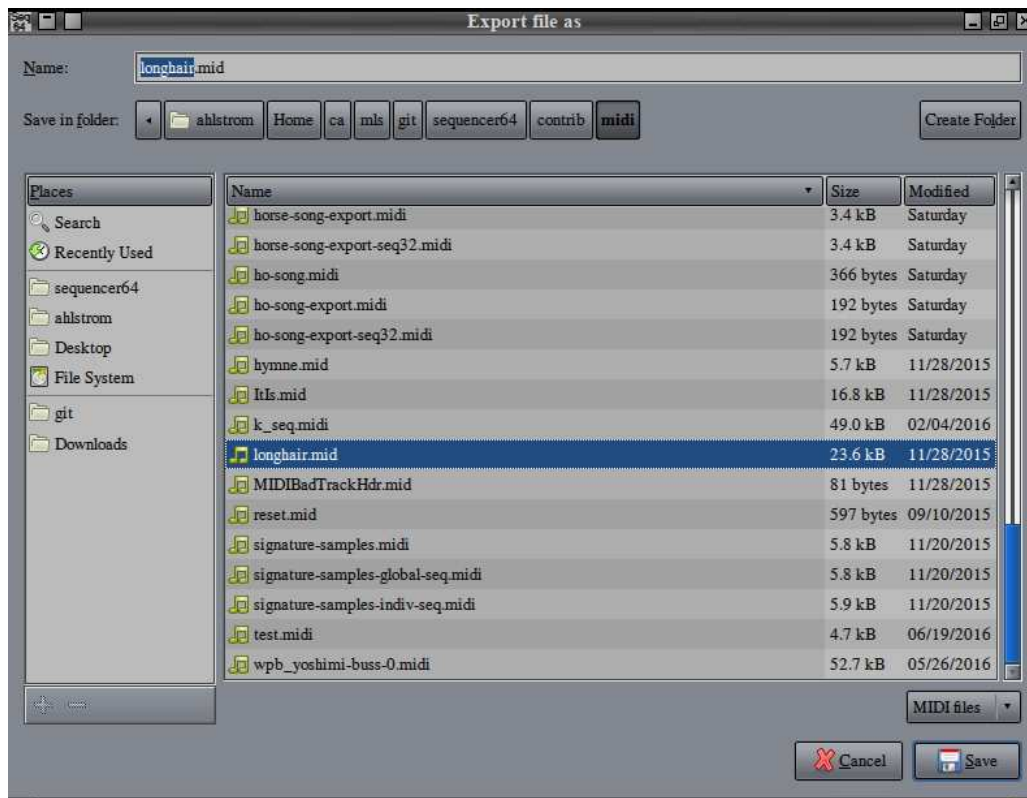


Figure 6: File / Export Song as MIDI

If there are no exportable tracks, the following message is shown:



Figure 7: Unexportable MIDI File

Once the file has been exported, it can be opened in order to see the results of the export. Both the main window view and the song performance view will show the results of the export.

Here is a short song, in two sets, shown in a composite view of four windows, showing each set and the performance layout of the tracks in the sets. (Note the second Song Editor window.)

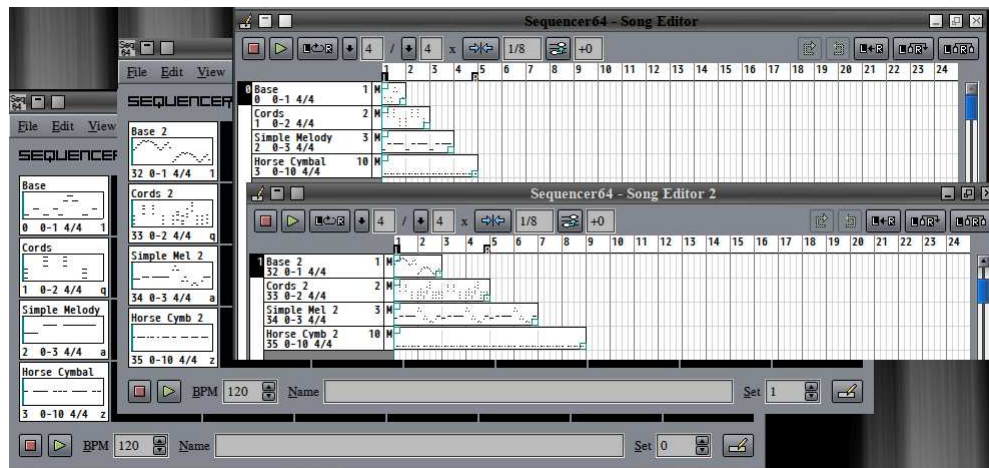


Figure 8: Composite View of an Exportable Song

The left column shows the four tracks of the first set (Set 0), the next column shows the four tracks of the second set (Set 1), and the layouts of the two sets are shown in the remainder of the diagram. Let's export this song, and see the result:

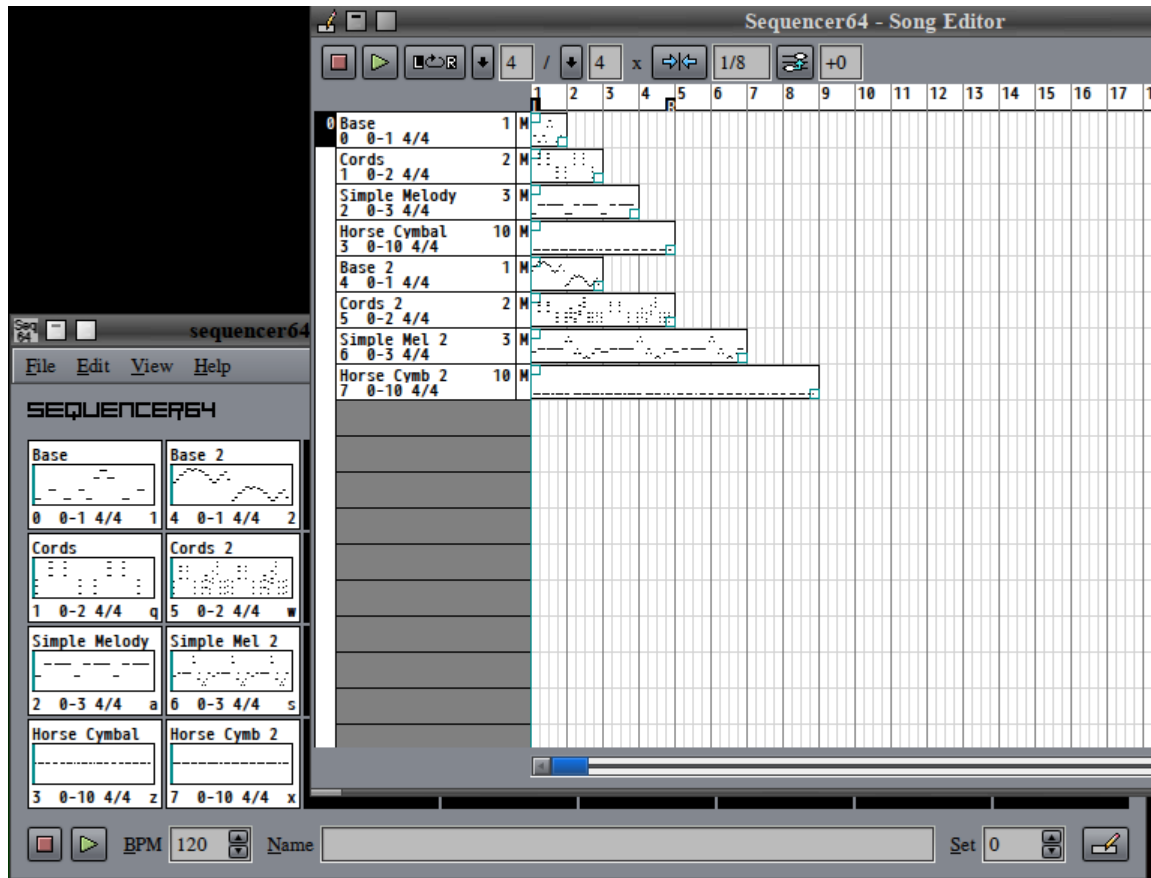


Figure 9: Composite View of Exported Song

Once can see that the two sets are now combined into the first set, and all of the track layouts (triggers) have been exported. Had there been gaps in layouts or repeats of layouts in the song/performance data, these would have been reflected in the triggers. Much more complex examples are, of course, possible.

2.2.6 Menu / File / Export MIDI Only

Sometimes it might be useful to export only the non-sequencer-specific data from a *Sequencer64* song. For example, some buggy sequencers might balk at some SeqSpec item in the song, and refuse to load the MIDI data. For cases like this, the **Export MIDI Only** menu item writes a file that does not contain the SeqSpec data for each track, and does not include all the SeqSpec data (such as mute groups) that is normally written to the end of the *Sequencer64* MIDI file.

Note that the meta data for track name is still written, so that the resulting file might be a little larger than the original .mid file that was imported into *Sequencer64*.

Also note that other meta data not handled by *Sequencer64*, such as Meta FF 21 01 pp (MIDI port pp), are also lost.

2.2.7 Menu / File / Options

Note: In the *Portmidi / Windows / Qt 5* version of *Sequencer64*, the **Options** dialog has been moved to **Files / Options / Preferences** menu entry.

The **Options** menu item provides a number of settings in one tabbed dialog, shown in the figures that follow.

In the **Qt 5** version of *Sequencer64*, this menu item has been moved to section [12.1.5 "Qt 5 Edit / Preferences"](#) on page [155](#), and there are still a few configuration items to be represented in that new user interface. Please see that section.

The **File / Options** dialog allows one to select which sequence gets the MIDI clock, which incoming MIDI events control the sequencer, what keys are mapped to functions, how the mouse works, and some JACK parameters. Note that there is a new tab-page for **Ext Keys**, to support more keystroke controls.

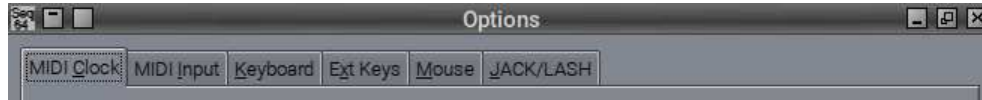


Figure 10: File / Options Tabs for Version 0.9.18+

2.2.7.1 Menu / File / Options / MIDI Clock

The **MIDI Clock** tab provides a way to send the MIDI clock to one or more of the *Sequencer64* output busses. It is used to configure to what busses the MIDI clock gets dumped. It also shows the devices that can play music. The items that appear in this tab depend on four things:

- What MIDI devices are connected to the computer. For example, MIDI controllers, USB MIDI cables, and other devices will add MIDI output devices (ports) to the system.
- What MIDI software applications are running on the computer. For example, running MIDI software synthesizers such as *Timidity* and *Yoshimi* will add extra output devices (playback ports) to a system.
- The setting of the "manual ALSA ports" option, `--manual-alsa-ports` command-line option or the `[manual-alsa-ports]` section of the `sequencer64.rc` configuration file, as described in section [9.9 "Sequencer64 "rc" File / Other Sections"](#) on page [124](#)
- The setting of the *Sequencer64*-specific "reveal ALSA ports" option, `--reveal-alsa-ports` command-line option or the `[reveal-alsa-ports]` section of the `sequencer64.rc` configuration file, as described in section [9.9 "Sequencer64 "rc" File / Other Sections"](#) on page [124](#)

For the current discussion, a USB MIDI cable was plugged into the system, and the *Timidity* and *Yoshimi* (in ALSA mode) software synthesizers were running. *Sequencer64* was also running, with the option of "manual ALSA ports" (`-m` or `--manual-alsa-ports`) and ALSA (`-A` or `--alsa` turned on. Here are the devices shown by the ALSA MIDI playback command-line application with the `-m` option:

```
$ aplaymidi -l
Port      Client name
14:0      Midi Through
24:0      E-MU XMidi1X1 Tab
128:0     TiMidity
128:1     TiMidity
128:2     TiMidity
128:3     TiMidity
129:0     seq64
Port name
Midi Through Port-0
E-MU XMidi1X1 Tab MIDI 1
TiMidity port 0
TiMidity port 1
TiMidity port 2
TiMidity port 3
seq64 in
```


Turning to figure 11 "MIDI Clock, Manual Option On, Condensed View" on page 23, note the 16 devices provided by *Sequencer64*. Also note that its first value is 1, not 0, due to the MIDI Thru port occupying slot 0. This figure shows the result with the "manual ALSA option" turned on. But remember that, now this option also applies to the native JACK MIDI version of *Sequencer64*, which has an executable named `seq64`.

Also note that the new **Port Disabled** radio button is not shown in here. See section 99 "Qt 5 Clock Preferences, Windows" on page 155, it shows this button.

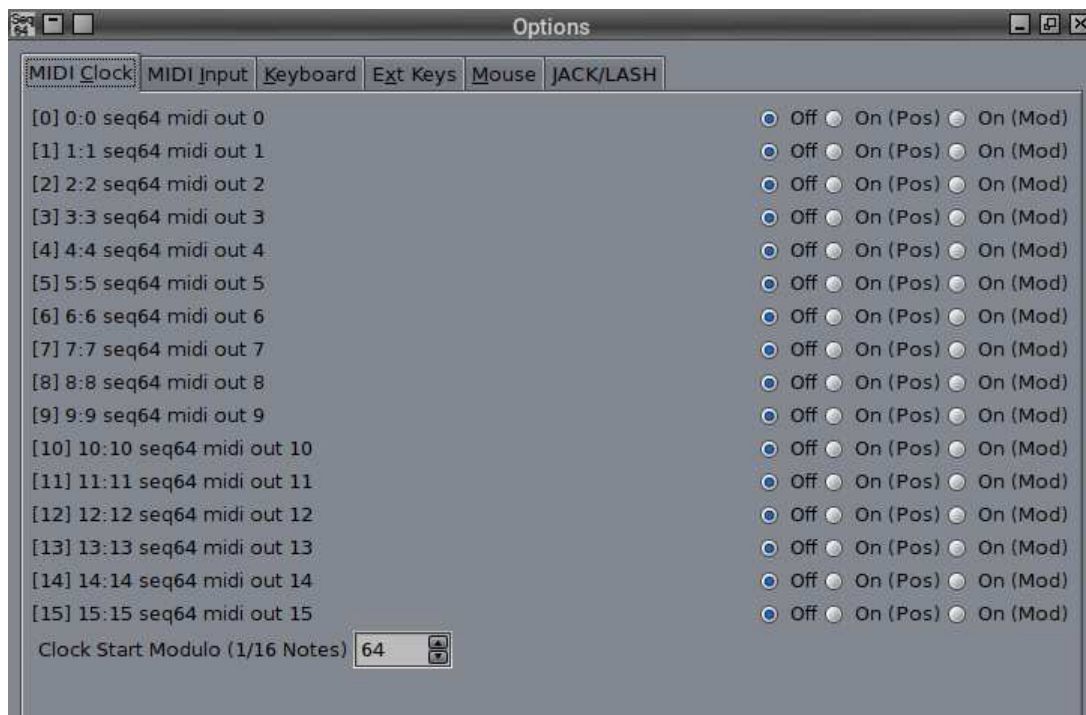


Figure 11: MIDI Clock, Manual Option On, Condensed View

It shows the 16 MIDI output busses that *Sequencer64* can drive, in the manual mode. One would have to use a JACK or ALSA MIDI connection application to put a device on each of those outputs. The fact that the the buss names can start with different numbers, depending on the system setup, can complicate the playing of MIDI in this manner. Also, the "user" configuration file can change the names of the ports, causing further confusion. The following elements are present in this dialog:

1. **Index Number**
2. **Client Number**
3. **Port Number**
4. **Buss Name**
5. **Off**
6. **Port Disabled** (new with 0.95)
7. **On (Pos)**
8. **On (Mod)**
9. **Clock Start Modulo**

1. Index Number. The number in square brackets is simply an ordinal indicating the position of the output buss in the list of busses. It can be used with the `--bus` option to redirect all output to that

one buss.

2. Client Number. The number that precedes the colon is the "client number". It is useful mainly in ALSA, where clients can have numbers like "14", "128", "129", etc. For native JACK mode, it just matches the index number.

3. Port Number. The number that follows the colon is the "port number". It is useful mainly in ALSA. For native JACK mode, it just matches the index number.

4. Buss Name. These labels indicate the output busses (ports) of *Sequencer64*. They range from [1] **sequencer64 1** to [16] **sequencer64 16** in the legacy application, **sequencer64**. They range from [1] **seq64 1** to [16] **seq64 16**. in the native JACK application, **seq64**.

5. Off. This setting disables the MIDI clock for the given output buss. However, note that MIDI output can still be sent to those ports, and each port that has a device connected to it will play music.

For feeding *Yoshimi* (running in ALSA mode) with MIDI data, we found that this setting is the one that must be made in order for *Yoshimi* to produce a sound.

6. Port Disabled. The Port Disabled clock choice is a way to mark that one does not want to use a port, or to mark that the operating system (*Windows*, I am looking at you) is locking the usage of that output port. Previously, this status of any inaccessible port would cause *Sequencer64* to exit. Now, the inaccessible port is ignored, and the user can use those ports that are accessible. See section 99 "[Qt 5 Clock Preferences, Windows](#)" on page 155, it shows this new feature.

7. On (Pos). The MIDI clock will be sent to this buss. MIDI Song Position and MIDI Continue will be sent if playback is starting at greater than tick 0 in Song mode. Otherwise, MIDI Start will be sent.

8. On (Mod). The MIDI clock will be sent to this buss. MIDI Start will be sent and clocking will begin once the Song Position has reached the start modulo of the specified size (see the next item's description). This setting is used for gear that does not respond to Song Position.

9. Clock Start Modulo. Clock Start Modulo (1/16 Notes). This value starts at 1 and ranges on upward to 16384. It defaults to 64. It is used by the **On (Mod)** setting discussed above. It is the [midi-clock-mod-ticks] option in the *Sequencer64* "rc" file as described in section 9.9 "[Sequencer64 "rc" File / Other Sections](#)" on page 124.

10. Meta Events. This new item currently consists of just one item, the tempo track number. This item allows the user to change the tempo track from pattern 0 to another pattern. Changing this option is not recommended, since track 1 (0) is the official track for tempo events, but *Sequencer64* allows the user to record tempo events to another track. *Sequencer64* will process tempo events in any pattern.

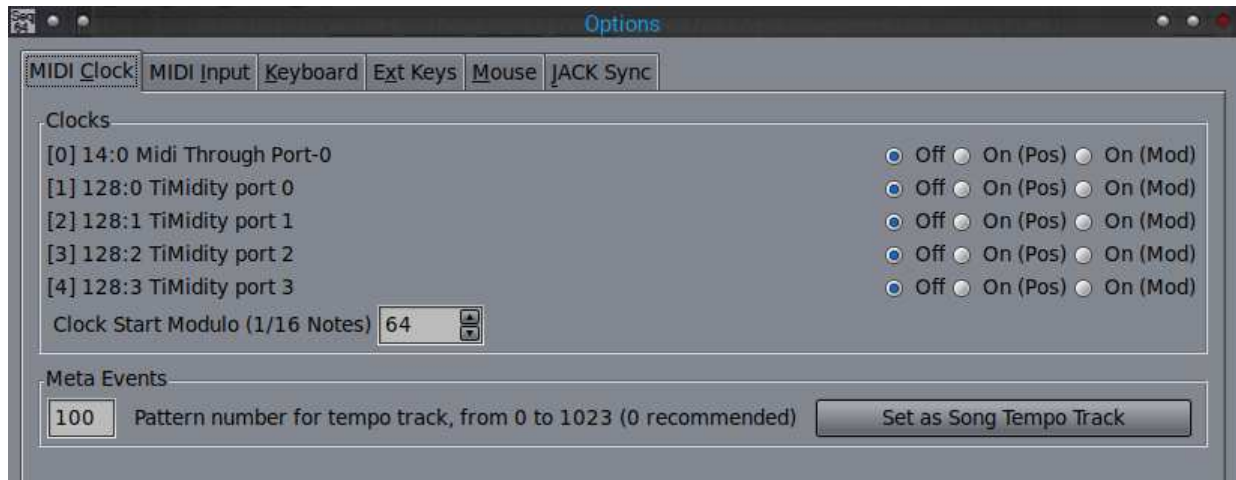


Figure 12: MIDI Clock, Manual Option Off (ALSA View)

As shown by the figure above, with the "manual ALSA option" turned off, all of the devices that can be driven by MIDI output are shown, including the MIDI Thru port, the four ports provided by *Timidity*, and the unlabelled port provided by the *Yoshimi* synthesizer running in ALSA mode. (However, *seq64* does show the name "yoshimi" as the client name.) One could theoretically play music through 6 or 7 devices using *Sequencer64* with this setup.

See section 16.2 "[Sequencer64 Native JACK MIDI](#)" on page 184, for a lot more information about native JACK support, and examples of JACK MIDI ports and connections.

TODO: There is currently no user-interface item corresponding to the "manual ALSA" command-line and "rc" configuration file option. We also want to rename this option to simply "manual" or "virtual" in the near future, since it can also apply to JACK MIDI.

There is a new option shown only in the figure above, and it supports the Set Tempo events introduced in version 0.93. This option, which lets the user change the default tempo track from 0 (the first pattern) to another value that accommodates the user's existing tunes. In addition, the **Set as Song Tempo Track** button will set this tempo track as part of the currently-load MIDI song file, and will be saved when exited. This value will override the global tempo-track value, which is stored in the 'rc' configuration file. However, if 0, it will be ignored, so that the global value will take hold. See section 9.5 "[Sequencer64 "rc" File / MIDI-Meta-Events Section](#)" on page 121, which discusses this new item in the "rc" configuration file.

One thing is important to remember about tempo... there is a "global" tempo which is saved as part of the song in a SeqSpec section. However, it is not saved in the tempo track. In order to do so, one can clock the **Log Tempo** button to write it to the tempo track as a tempo event.

2.2.7.2 Menu / File / Options / MIDI Input

To allow *Sequencer64* to record MIDI from MIDI devices such as controllers and keyboards, the output of the ALSA MIDI recording command-line application is relevant:

```
$ arecordmidi -l
Port      Client name      Port name
14:0      Midi Through     Midi Through Port-0
```

24:0	USB2.0-MIDI	USB2.0-MIDI MIDI 1
129:1	seq64	seq64 midi out 0
129:2	seq64	seq64 midi out 1
.
129:16	seq64	seq64 midi out 15

We see that we can record MIDI from the MIDI Thru port, from the USB MIDI cable, and MIDI from any of the 16 output ports provided by the manual ALSA port mode of *Sequencer64*.

If the "manual ALSA ports" option is turned *off* (e.g. by using the `-A` option), then the only item in the **MIDI Input** tab is the single MIDI input buss provided by *Sequencer64*: `[0] seq64 0`. (The figure shown is currently out-of-date.)

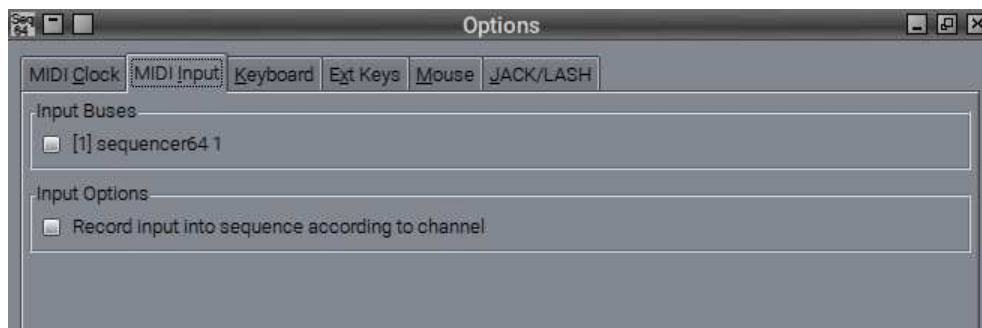


Figure 13: MIDI Input, Manual Ports Off (Condensed View)

This item, if checked, allows *Sequencer64* to be used to record MIDI information from another source (which must be connected to this port by another application), or pass it through to the output busses that are configured to allow pass-through (in the Pattern Editor, as discussed in section 4.4 "Pattern Editor / Bottom Panel" on page 80.)

Warning: If the `[user-midi-bus-definitions]` value in the "user" configuration file is non-zero, and the corresponding number of `[user-midi-bus-N]` settings are provided, then the list of existing hardware will be ignored, and those values will be shown instead. (This feature can be overridden with the `--reveal-alsa-ports (-r)` option.)

If the "auto ALSA ports" option is turned on, via the `-a` or `--auto-alsa-ports` option, then the input ports from the system are shown:



Figure 14: MIDI Input, `-a` Option (Condensed View)

For example, one could check input #1 to have *Sequencer64* record MIDI from an old-fashioned MIDI keyboard that is connected to another USB MIDI cable (the *E-MU Xmidi*). If the keyboard didn't have a sound generator, one would also want *Sequencer64* to pass this MIDI on to a sound generator, such as a software or hardware synthesizer attached to one of the ports shown in figure 12 "MIDI Clock, Manual Option Off (ALSA View)" on page 25.

Warning: Again, note that the "user" configuration file can override what is actually displayed as hardware. If you define these sections, they should match your hardware exactly, and your hardware should not change from session to session.

Note the two sections of this configuration page:

Input Buses delineates the MIDI input devices as noted above. **Input Options** adds further refinements to MIDI input.

Record input into sequence according to channel, is a new feature ported from *Seq32*. When enabled, MIDI input with multiple channels is distributed to each sequence according to what MIDI channel the sequence is set to. When disabled, the legacy recording behavior dumps all data into the current sequence, regardless of channel.

2.2.7.3 Menu / File / Options / Keyboard

Seq24 allows extensive use of keyboard shortcuts to make operations go faster than when using a mouse, and *Sequencer64* extends that tradition. The **Keyboard** tab allows for the configuration of these keyboard shortcuts.

Warning: There are a number of "gotchas" to be aware of when assigning keys to the fields in the **Keyboard** tab:

- This configuration dialog is not yet present in the **Qt 5** version of *Sequencer64*. For now, one has to edit the "rc" file to configure the keystrokes. It is easiest to just use the sample `qpseq64.rc` from the `data` directory in the source-code package. It gets installed in `/usr/share/sequencer64-0.95` (on Linux).
- Whenever one of the text fields in this dialog has the focus (and that is usually the case), then any keystroke, including keys like Ctrl, Alt, and Super (Mod4 or Windows key), can alter the value of a field to that of the keystroke. This change is very easy to do accidentally! Use the mouse to move this window and to click its **OK** button!
- Some of the keys traditionally used (or used by default) for control have been adapted for other uses. One example is **Ctrl-L**, which brings up the learn mode that can be started using the "L" button.
- *Sequencer64* has appropriated the Shift key so that it modifies a click on a pattern so that all of the other patterns are *toggled*. Therefore, using characters that require the Shift key while clicking, such as { and }, when used to set the **Replace** function, becomes surprising. Instead, look to the remaining keys: F11, F12, and the "keypad" keys if more options are wanted. Be sure to look at the **Ext Keys** tab to see what other keys are in use.

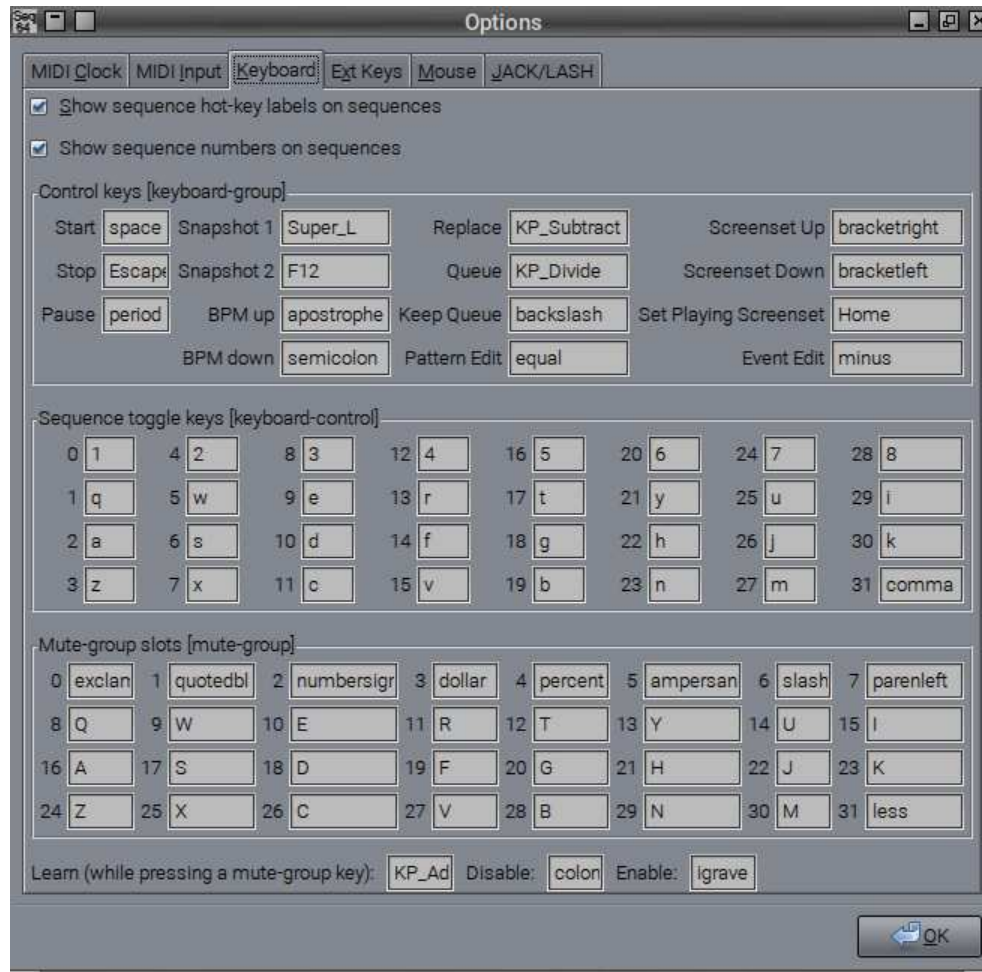


Figure 15: File / Options / Keyboard

We won't attempt to cover every user-interface item in this busy dialog, just the categories. Some items are discussed in other parts of this manual.

There are a few things to note in the `[keyboard-control]` section. First, it is laid out like the main patterns panel, in an 8 x 4 grid. The keys in there correspond directly to the patterns panel slot, and the conventional keyboard layout is shown. Second, if one is looking for more keys to map to other functions, the conventional layout keeps open the following keys: 9 o 1 0 p.

The `[mute-group]` section is laid out in a similar manner, except that the upper-case versions of the keys are used. Additional keys are available for other functions: (0 L) P.

Currently, one must be very carefully about assigning the same key to different functions. Confusion will ensue!

If the application has been built with the "pause" option, an additional key definition is shown for the Pause key. By default, the Pause key is the period ("."). An old version of the "rc" file is automatically fixed to include this new option. (The pause feature can be removed by rebuilding the application after configuring with the `--disable-pause` option.)

With version 0.9.12, we add a new feature as we try to achieve the goal of being able to edit a pattern using only the keyboard. *Sequencer64* now supports two modifier keys. The first modifier key causes the

usual pattern-toggle key (hot-key) for a given slot to instead bring up the pattern editor. By default, this key is the equals ("=") key. The second modifier key causes the usual pattern-toggle key (hot-key) for a given slot to instead bring up the event editor. By default, this key is the minus ("-") key. These keys are configurable in the **File / Options / Ext Keys** page.

To continue with a listing of the keyboard options:

1. **Show sequence hot-key labels on sequences**
2. **Show sequence numbers on sequences**
3. **Control keys** [keyboard-group]
4. **Sequence toggle keys** [keyboard-control]
5. **Mute-group slots** [mute-group]
6. **Learn**
7. **Disable**
8. **Enable**

1. Show key labels on sequence. This item, if enabled, shows the key labels in the lower-right corner of each loop/pattern in the Patterns window (the main window). This feature is useful for live playback and control of a song. Note that this option is also available in the "rc" configuration file. Also note that this option will enable the display of the pattern length, in measures, at the top right of the pattern slot, not shown in the current diagram.

2. Show sequence numbers on sequence. **New:** If this option is turned on, the empty slots in the Patterns window show the prospective sequence number. See the following figure for one look of this feature.

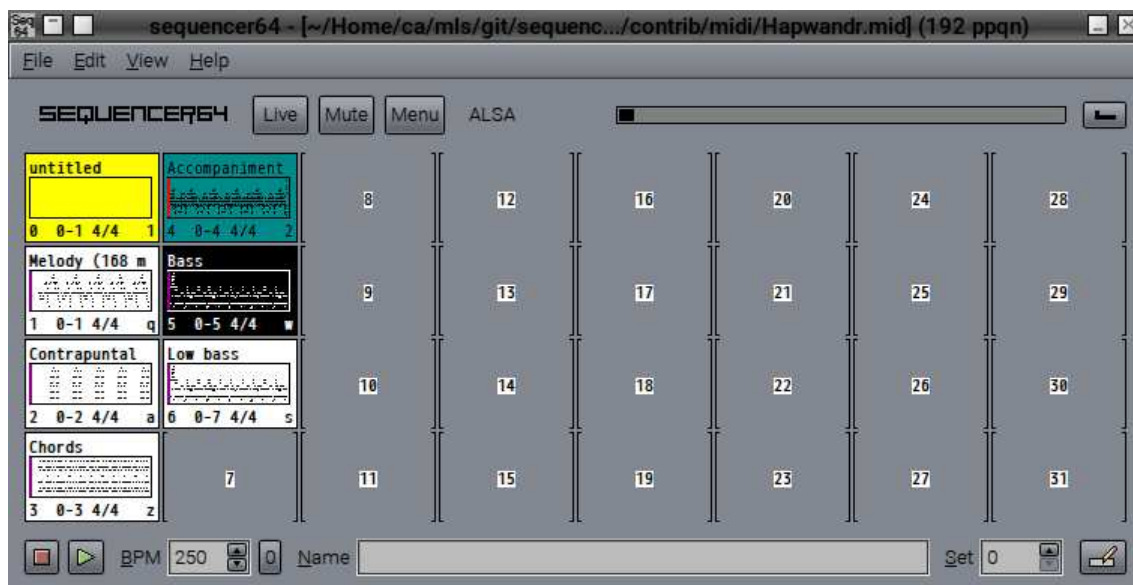


Figure 16: Pattern Window with Numbering

If one doesn't like it, turn off the option in the "rc" configuration file, or try other grid options in the "user" configuration file. Also note that the option also changes the visibility of sequence numbers in active sequences and in the Song Editor's names column.

3. Control keys. This block of fields in the **Options / Keyboard** tab provides shortcut keys for many operations of *Sequencer64*. There is a default mapping built into *Sequencer64*, but open the keyboard options tab to see the actual values.

1. **Start.**
2. **Stop.**
3. **Pause.**
4. **Slot Shift.**
5. **Snapshot 1.**
6. **Snapshot 2.**
7. **bpm up.**
8. **bpm down.**
9. **Replace.**
10. **Queue.**
11. **Keep queue.**
12. **Screenset down.**
13. **Screenset up.**
14. **Set playing screenset.**

Some of the keys have positional mnemonic value. For example, for BPM control, the semicolon is at the left (down), and the apostrophe is at the right (up). Note that the keys definable in this tab are only a subset of the various keys that can be used, especially keys used with the **Ctrl** key or other modifier keys.

The *slot shift* key is useful when using pattern grids larger than 8 x 4 patterns. Pressing the slot-shift key basically adds 32 to the pattern number of the slot-key that is pressed.

A *snapshot* is a briefly preserved state of the patterns. One can press a snapshot key, change the state of the patterns for live playback, and then release the snapshot key to revert to the state when the snapshot key was first pressed.

To *queue* a pattern means to ready it for playback upon the next repeat of a pattern. A pattern can be armed immediately, or it can be queued to play back the next time the pattern starts. A pattern can be queued by holding the queue key (defined in **File / Options / Keyboard / queue**) and pressing a pattern-slot shortcut key. Instead of the pattern turning on (or off) immediately, it turns on at the next repeat of the pattern.

The *keep queue* functionality allows the queue to be held without holding down the queue button the whole time. First, press the keep-queue key (defined in **File / Options / Keyboard / Keep queue**). Now, hitting any of the shortcut keys, no matter how many, sets up the corresponding pattern slot to be queued. Also, in keep-queue mode, clicking on the pattern slot will queue the pattern. The keep-queue mode is disabled by hitting the "queue" key (any currently active queues remain active until finished).

Be sure to note the new option, "one-shot queue", in the extended-keys section (section [3.2.1 "Pattern Slot"](#) on page 46).

4. Sequence toggle keys. Each of these keys toggles the playing/muting of one of the 32 loop/pattern boxes. These keys are layed out logically on the keyboard, and can also be shown in each loop/pattern box. No need to list them all here! Please note that we often call them "shortcut keys" where the context makes it clear that they apply to the armed/unarmed state of a pattern. Sometimes they are called "hot keys".

5. Mute-group slots. Each of these keys operates on the mute-grouping of one of the 32 loop/pattern boxes (sets). These keys are layed out logically on the keyboard, and will also be shown in each loop/pattern box. No need to list them all here! But basically, they are the shifted versions of the keyboard keys used as hot-keys for the patterns. However, note that the mute-group keys will be set only when *Sequencer64* is in *group-learn* mode.

One thing to explain is just what mute-grouping means functionally. *Mute groups* are shortcuts to play a defined group of patterns on the current set, while stopping other patterns from the current set, and all patterns from other sets.

To define the group of patterns for one mute group, press and hold the Learn key (the **Insert** key by default, but see the current configuration) and, simultaneously, press one of the mute group keys: *Sequencer64* will save the currently-playing pattern slots into the corresponding mute group. The default mute group keys need the **Shift** modifier, but one does not need the **Shift** key while pressing **Insert** to learn the group, only to trigger it (*Sequencer64* will automatically assign the corresponding key with **Shift** activated).

Now, on some keyboards (like the author's), the **Insert** key is a clumsy two-key button. So, an alternative is to click the **L button** and release it, then hit the desired mute-group (no need for the **Shift** key).

Group-mute can be globally enabled or disabled (with default keys apostrophe ' and igrave or grave `). So make sure it is enabled before trying to use it.

6. Learn. Learn (while pressing a mute-group key). This items sets the key used to initiate a learn mode. It is the **Insert** key by default. When in group-learn mode, the **Shift** key cannot be hit, so the group-learn mode automatically converts the keys to their shifted versions. This feature known as *shift-lock* or *auto-shift*. It is new to *Sequencer64*.

Also, currently necessary because pressing **Shift** can clear the arming of the patterns in the current set.

7. Disable. It is the **apostrophe** key by default. This key is the *group off* key.

8. Enable. It is the **igrave** (back-tick) key by default. This key is the *group on* key.

2.2.7.4 Menu / File / Options / Ext Keys

A number of additional functions have been added to *Sequencer64*, and keystrokes have been provided for those new functions, in the **Ext Keys** page. This page is needed because the original page is completely filled.

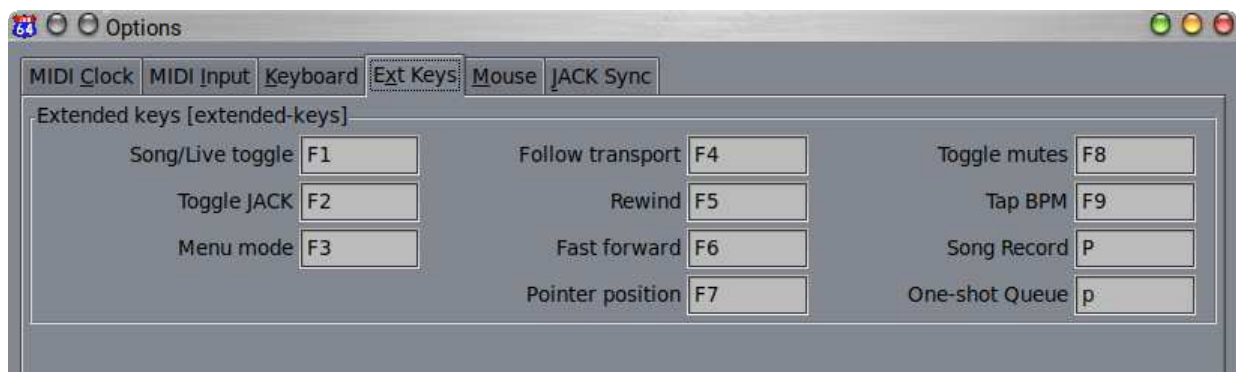


Figure 17: File / Options / Ext Keys (Condensed View)

9. Ext Keys. This block of fields in the **Options / Ext Keys** tab provides shortcut keys for more operations of *Sequencer64*, many of them ported from *Seq32* or *Kepler34*.

1. **Song/Live toggle.**

2. **Toggle JACK.**
3. **Menu mode.**
4. **Follow transport.**
5. **Fast forward.**
6. **Rewind.**
7. **Pointer Position.**
8. **Toggle mutes.**
9. **Tap BPM.**
10. **Song Record.**
11. **One-shot Queue.** This new feature allows one-shot queuing of a pattern.

Most of these extended keys implement operations performed with button presses. However, some of the new keystrokes do not have a corresponding button (yet).

These values are saved as the [extended-keys] section of the "rc" configuration file. However, not all builds of *Sequencer64* will support the new keys. Some of the new features can be enabled or disabled during the build-configure step, and one's favorite distro may decide to disable some features. In this case, although the values will still be stored in the "rc" file, they will be disabled or missing in this tab:



Figure 18: File / Options / Ext Keys (Disabled)

Note the **Song/Live toggle** key. The *song mode* normally is in effect only when playback is started from the **Song Editor**. Now this mode can be used from any window, if enabled by pressing this key. There is also a button in the main window for this function, which shows the current state of this flag. Note that this flag is also stored in the "rc" configuration file, as well as this hotkey value, which defaults to F1.

The *JACK mode* is normally set via the **File / Options / JACK / JACK Connect** or **JACK Disconnect** buttons. But, if *Sequencer64* is built for using the *Seq32* JACK support, then this keystroke will toggle between JACK connect and JACK disconnect. Note that, with this kind of build, the **Song Editor** will also have a **JACK** button. The hotkey for this function defaults to F2.

The *menu mode* simply indicates if the main menu of the main window is accessible or not. It will be disabled in playback so that more hotkeys can be used without triggering menu function. It can also be disabled by the user; the default hotkey is F3. Here is Stazed's explanation of the feature, mildly edited:

"why disabling is needed when playing" The original seq24 had numerous conflicts between the menu key binding and the default seq24 key binding for the mainwind sequence triggers. For example: Ctrl-q (quits the program without prompt). If you place a sequence in the default 'q' slot, you cannot use it with Ctrl-l or Ctrl-r (default replace or queue) because the menu grabs the keys. Same goes for the Alt-l or Alt-r (default snapshot 1 or 2). Try same as above with Alt-f, Alt-v, Alt-h, Ctrl-n, Ctrl-o... etc. So I just shut off all the menus by default when playing because it seems that they should not be needed then... especially in a live performance.

"why a button?" On occasion I wanted to use the mainwnd key binding when stopped to set the sequences to be ready before starting. It's also a sort of safety feature as well, just toggle the menus off before going live so that you don't hit Ctrl-q, Ctrl-n etc. forgetting things are not playing....

The *follow transport* functionality is a feature ported from *Seq32*. We'll have more of a description of it later. The default key is F4.

The *fast forward* functionality is a feature ported from *Seq32*. Basically, while this key is held, the song pointer will fast-forward through the song. The default key is F5. This feature does not (yet) have a corresponding button. This feature also requires that the *Seq32* transport option be enabled at build time.

The *rewind* functionality is a feature ported from *Seq32*. The default key is F6. Basically, while this key is held, the song pointer will rewind in the song. This feature does not (yet) have a corresponding button. This feature also requires that the *Seq32* transport option be enabled at build time (and now that is the default). Be sure not to use the following keys, which are already hardwired for other functions in the Song Editor:

- p. Paint mode.
- x. Escape paint mode.

The *pointer position* functionality is a feature ported from *Seq32*. The default key is F7. Basically, when this key is pressed, the song pointer will move to the current position of the mouse, snapped. This feature does not have a corresponding button.

The *toggle mutes* function toggles the mute status of every pattern on every screen-set. It corresponds to the **Edit / Toggle mute all tracks** or the **Song / Toggle All Tracks** menu entries. There is also a button in the main window for this function, which shows the current state of this flag. Note that this hotkey value is stored in the "rc" configuration file, and defaults to F8.

The *tap bpm* function allows the user to "tap" in time with some other music, and see the tap sequence translated into beats/minute (BPM). There is also a button for this function. After 5 seconds, this feature resets automatically, so the user can try again if not satisfied. At least two clicks are needed for this functionality to work.

2.2.7.5 Menu / File / Options / Mouse

This item selects the mouse-interaction method.

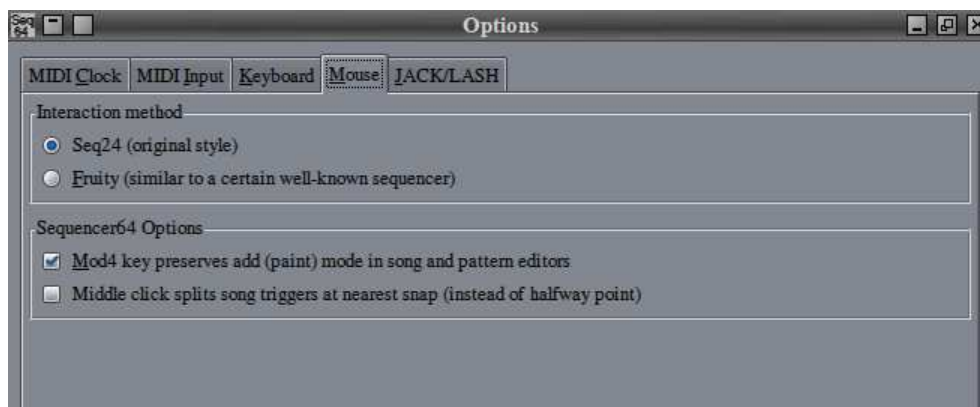


Figure 19: File / Options / Mouse (Condensed View)

Interaction Method

The default mouse interaction method is **Seq24 (original style)**. The alternate mouse interaction method is **Fruity (similar to a certain well known sequencer)**.

The alternate method is presumably that of the *Fruity Loops* (now *FL Studio*) sequencer. The fruity mode seems to involve the following (based on scanning the source code):

- **Left-click left side.** Begin a grow/shrink operation for the left side. However, even in *Seq24*, this action is *broken*. It does allow one to move the note, however.
- **Left-click right side.** Begin a grow/shrink operation for the right side.
- **Left-click middle.** Move the object. To clarify, each note image has an invisible "handle" on the left or the right side, with the middle providing a third area of interaction in the "fruity" mode.
- **Left-click.** Add an event if nothing selected.
- **Middle-click.** Split the note?

The *Seq24* "original style" is pretty much as expected for basic actions such as selecting and moving notes using the left mouse button. Drawing a note or event is a bit different, in the one must first *click and hold* the right mouse button, and then *click and drag* the right mouse button to insert notes. Notes are inserted to be at the current length and grid-snap values for the sequence editor for as long as the left button is pressed. Notes are inserted only up to the boundary of the sequence length. And, once notes are inserted, moving the mouse with the left button still held down simply moves the notes to the new note value of the mouse.

If one releases the left button, then presses and holds it again, more notes will be added in the same way. This is strange, but it is a powerful way to layer notes into a short sequence. We call it the "draw mode" or "paint mode".

Note that drawing/painting can also be done while the sequence is playing, and notes will be added to be played the next time the progress bar crosses them.

Sequencer64 Options

This section currently contains a couple of new options.

Mod4 key preserves add (paint) mode in song and pattern editors

In order to work better with certain trackpads, the "Seq24" mode of mouse interaction can be modified in the Pattern or Song editors so that the Mod4 key (Super or Windows key) can be pressed when releasing the right mouse button. This keeps the mouse in note-add mode. Another right-click, without pressing Mod4, will exit this mode. The reason for this feature is the crummy FocalTech touchpad on one of the author's laptops. This trackpad seems to have only a single button, which the driver interprets as left or right depending where the finger is when it is clicked. There's no way to click the right and left buttons at the same time. There's no way to make a middle-click action. What a crock!

Note that this option will not interfere with the Mod4 key being set in the **Keyboard** option tab, since the keys there mainly apply to the Patterns Panel (main window).

Middle click splits song triggers at nearest snap (instead of halfway point)

Another way to turn on the paint mode has been added, based on a feature found in a patch that someone posted about in some mailing list somewhere on the internet. To turn on the paint mode, press the p key while in the sequence editor. This is just like pressing the right mouse button, but the draw/paint mode sticks (as if the Mod4 mode were in force). To get out of the paint mode, press the

x key while in the sequence editor. These keys, however, do not work (currently) while the sequence is playing.

These convenience options are limited to the pattern/sequence editor window and the performance editor window, and may need some heavier testing. Also note that some *Sequencer64* windows can use the ctrl-left-click as a middle click.

2.2.7.6 Menu / File / Options / Jack Sync

This tab sets up options for JACK synchronization, if *Sequencer64* was built with JACK support. (Why wouldn't it be?) It now also supports native JACK MIDI. This tab also sets up options for using LASH session management, if *Sequencer64* was built with LASH support, which is no longer the default, even though it is shown in the figure below.

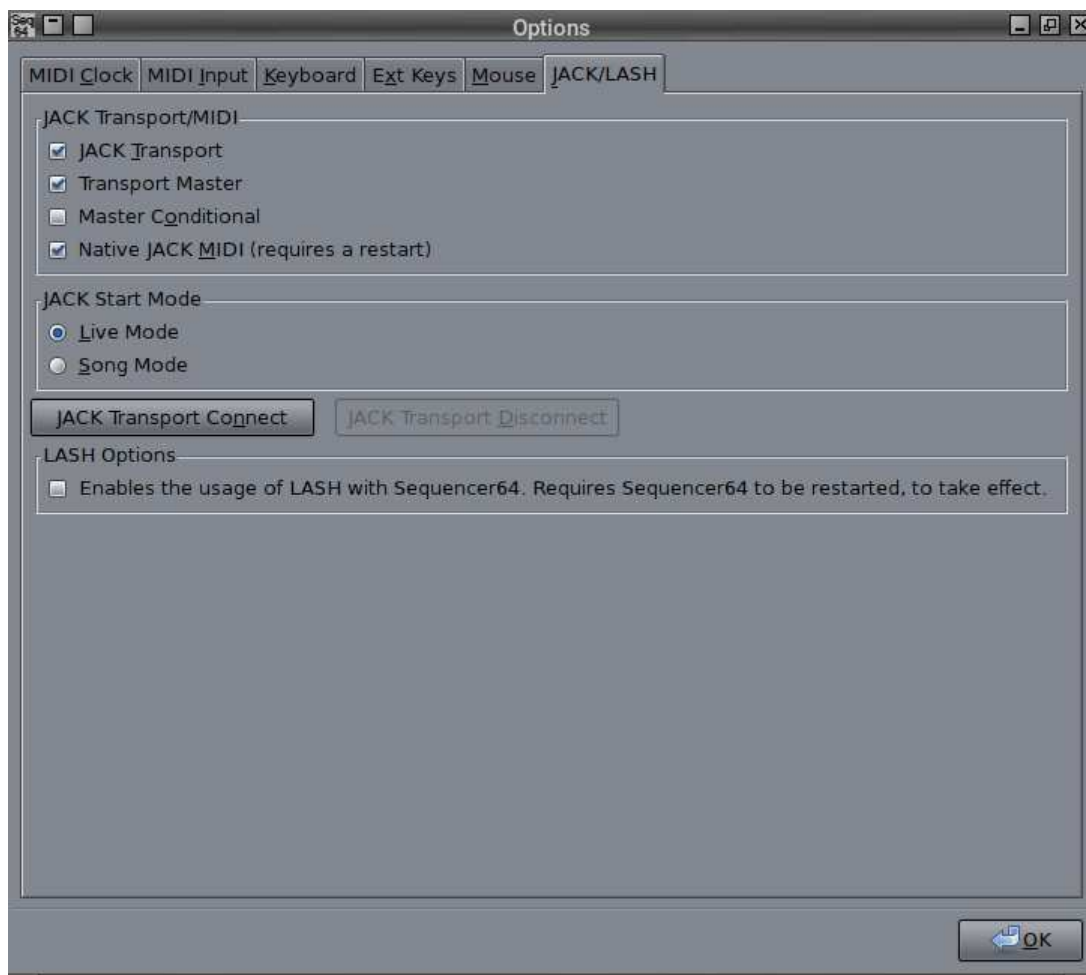


Figure 20: File / Options / JACK

The main sections in this dialog are:

1. **JACK Transport/MIDI**
2. **JACK Start Mode**
3. **JACK Transport Connect and Disconnect**

4. LASH Options

1. Transport/MIDI. These settings are stored in the "rc" file settings group [jack-transport]. See section 9.8 "Sequencer64 "rc" File / JACK Transport" on page 123, which describes this configuration option. This items collects the following settings:

- **Jack Transport.** Enables slave synchronization with JACK Transport. The command-line option is `--jack-transport`. The behavior of this mode of operation is perhaps not quite correct. Even as a slave, *Sequencer64* can start and stop playback. Note that this option cannot be disabled via the mouse if the **Transport Master** option is enabled. Disable that one first.
- **Transport Master.** *Sequencer64* will attempt to serve as the JACK Master. The command-line option is `--jack-master`. **Tip:** *Sequencer64* generally works a little better as JACK Master. If this option is enabled the **JACK Transport** option is automatically enabled as well.
- **Master Conditional.** *Sequencer64* will fail to serve as the JACK Master if there is already a Master set. The command-line option is `--jack-master-cond`. If this option is enabled the **JACK Transport** option is automatically enabled as well.
- **Native JACK MIDI.** This option is for the `seq64` version of *Sequencer64*. If set, MIDI input and output occur using the new JACK MIDI interface, rather than using ALSA. However, if JACK is not running on the system, then `seq64` will fall back to ALSA mode. The command-line option is `--jack-midi`.

Note that there are long-standing issues with the JACK support of *Seq24*, and *Sequencer64* currently inherits some of them, in spite of some bug fixes. Generally, if one experiences issues in transport control, try making one of the other sequencer applications the JACK Master. If one starts *Sequencer64* in JACK mode without JACK running, it will take a little while for *Sequencer64* to start up, and it will fall back to ALSA usage.

Finally, if one makes a change in the JACK transport settings, it is best to then press the **JACK Transport Disconnect** button, then the **JACK Transport Connect** button. Another option is to restart *Sequencer64*... the settings are automatically saved when *Sequencer64* exits.

2. JACK Start mode. This item collects the following settings, also stored in the "rc" file settings group [jack-transport].

- **Live Mode.** Playback will be in live mode. Use this option to allow muting and unmuting of patterns. This option might also be called "non-song mode". The command-line option is `--jack-start-mode 0`.
- **Song Mode.** Playback will use only the Song Editor's data. The command-line option is `--jack-start-mode 1`.

Note that *Sequencer64* selects the playback modes according to which window started the playback (reverting back to legacy *Seq24* behavior).

The *main window*, or pattern window, causes playback to be in live mode. The user can arm and mute patterns in the main window by clicking on sequences, using their hot-keys, and by using the group-mode and learn-mode features. The song editor causes playback to be in performance mode, also known as "playback mode", or **Song** mode.

3. Connect. Connect to JACK Sync. This button is useful to restart JACK sync when making changes to it, or when *Sequencer64* was started in ALSA mode.

4. Disconnect. Disconnect from JACK Sync. This button is useful to stop JACK sync when making changes to it.

5. LASH Options. Currently contains only one item, which enables the usage of LASH session management. Currently, *Sequencer64* needs to be restarted to complete the enabling or disabling of LASH support. Like the rest of the options, this one is written to the "rc" configuration file.

Finally, there is a new button (labelled *Master* in the following figure) in the main window to bring up directly the **JACK** (or **JACK/LASH**) page.



Figure 21: JACK Connection Button

This button not only brings up the JACK page, but also shows the current status of the MIDI connection: **Master** (JACK Transport Master), **Slave** (JACK Transport Slave), **JACK** (native JACK MIDI, overrides any transport label), and **ALSA** (overridden by any transport label). The **Ctrl-P** key will also bring up this page.

One thing to note is that, while playing, the JACK/ALSA button is disabled. However, one can still get to the JACK options via the main File menu. JACK connection and disconnection are disabled during playback, but the buttons don't yet reflect that status.

2.3 Menu / Edit

The **Edit** menu has undergone some expansion lately.



Figure 22: Edit Menu

1. Song Editor...
2. Apply song transpose
3. Clear mute groups
4. Reload mute groups
5. Mute all tracks
6. Unmute all tracks
7. Toggle mute all tracks

1. Song Editor. This item is the same as the **View / Song Editor toggle** menu entry. It toggles the presence of the main song editor.

2. Apply song transpose.

Selecting this item applies the song transposition value to **all** sequences/patterns that are marked as transposable. (Normally, drum tracks are *not* transposable). This actively changes the note/pitch value of all note and aftertouch events in the pattern.

Once the transpositions are done, the transposition value is set to 0. For the setting of song transpose, see section 5 "Song Editor" on page 85, for more information. Also note that transpose can be enabled in the patterns panel for each pattern (see section 3.2.2 "Pattern" on page 50) and in the sequence editor (see section 4 "Pattern Editor" on page 63).

3. Clear mute groups.

A feature of *Seq24* and *Sequencer64* is that the mute groups are saved in both the "rc" file (see section 9.3 "Sequencer64 "rc" File / Mute-Group Section" on page 119) and in the "MIDI" file (see section 15.2 "Legacy Proprietary Track Format" on page 172).

This menu entry clears them. If this resulted in any mute-group sequences status being set to false, then the user will be prompted to save the MIDI file, so that it will no longer have any mute-group information. And then, currently, if the application is exited, the cleared mute-group information is also saved to the "rc" file. We'd like to be able to handle the "rc" and "MIDI" mute-groups separately in the future.

4. Reload mute groups.

This menu entry reloads the mute-groups from the "rc" file. So, if one loads a MIDI file that has its own mute groups that one does not like, this command will restore one's favorite mute-grouping from the "rc" file.

5. Mute all tracks.

This menu entry, available only in **Live** mode, immediately mutes *all* patterns in the entire song.

6. Unmute all tracks.

This menu entry, available only in **Live** mode, immediately unmutes *all* patterns in the entire song.

7. Toggle mute all tracks.

This option toggles the mute/armed status of **all** tracks. It is only available in **Live** mode, which overrides **Song** mode even if the Song Editor is focussed.

*Do not confuse it with the main **Mute** button, which toggles the status only of the tracks that are armed and remembers them.*

2.4 Menu / View

If the "allow two perfedits" option is turned off in the "user" configuration file, this menu item has only one entry, **Song Editor**, which is already covered by a button at the bottom of the Patterns window. Selecting this item bring up the Song Editor window. See figure 73 "Song Editor Window" on page 86. The Song Editor window can also be brought up via the Ctrl-E key.

If the **allow two perfedits** option is turned on in the "user" configuration file, this menu item has two entries, as shown in the following figure:



Figure 23: Dual Song Editor Entries in View Menu

Note that only the first Song Editor has a user-interface button and a hot-key. Also note that there can be issues bringing up the second song-editor with the hot-key. The menu entry will always work.

If two song editors are up, they each track any changes made in the other song editor. But the main purpose of two song editors is to arrange two different parts of the performance at the same time.

2.5 Menu / Help / About...

This menu entry shows the "About" dialog.

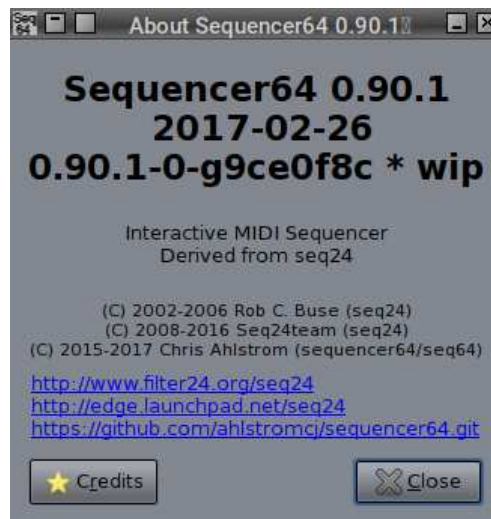


Figure 24: Help / About

That dialog provides access to the credits for the program, including the authors and the project documentors. It has recently been updated to show Git version-control information as well.

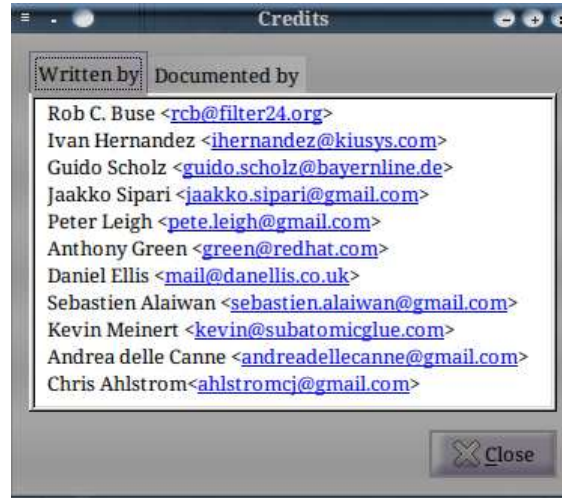


Figure 25: Help Credits

Shows who has worked on the program, with the original author at the top of the list.



Figure 26: Help Documentation

Shows who has documented this project.

2.6 Menu / Help / Build Info...

This menu entry shows the "Build Info" dialog. This list of build options enabled in the current application is the same list that it generated via the one of the following command lines:

```
$ sequencer64 --version
$ seq64 --version
```

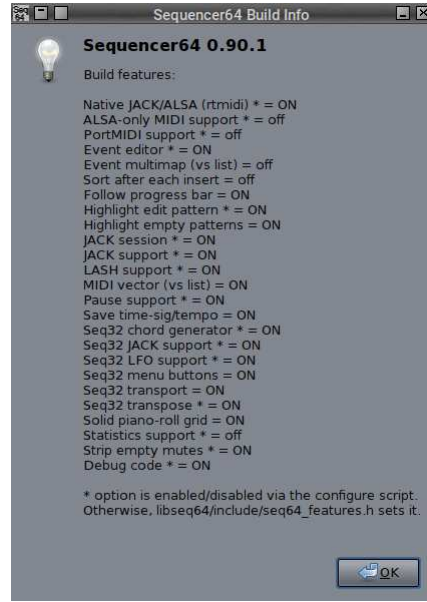


Figure 27: Help / Build Info

3 Patterns Panel

Sequencer64 works with patterns (loops, track, or sequences) that are repeated all along a song. One composes and edits small patterns, and combines them to create a full song. This is a powerful way to work, and makes one productive within an hour.

The *Sequencer64 Patterns Panel* is the **main window** of *Sequencer64*. See figure 1 "[Sequencer64 Main Screen, ALSA MIDI](#)" on page 13. It is called the "main window" or the "patterns window". It is here one creates a set of patterns (see section 13.1.16 "[Concepts / Terms / screen set](#)" on page 160), manages the configuration, controls the playback rate, adds tempo events, and opens the pattern or song editors.

When the Patterns Panel has the application focus, and *Sequencer64* is *not* running in **Song** mode, it puts *Sequencer64* in **Live** mode. The musician can control the playback and muting/unmuting of each pattern in the song, while it is playing, from within this window.

If the song editor (see section 5 "[Song Editor](#)" on page 85) has the input focus, it controls the muting/unmuting of each pattern, and *Sequencer64* runs in **Song** mode.

Back to the patterns panel.... For exposition, we break the Patterns Panel into a menu bar, a top panel, a pattern panel, and a bottom panel. (The *Sequencer64* menu bar is discussed in section 2 "[Menu](#)" on page 14.)

3.1 Patterns / Top Panel

The top panel of the Pattern window is relatively simple, consisting of the name of the program and a few controls. The latest version adds more buttons.

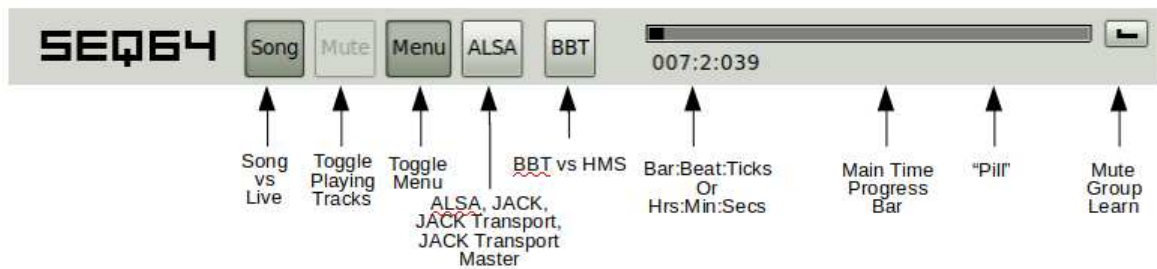


Figure 28: Patterns Panel, New Top Panel Items

This figure shows the appearance of the main window top panel.

1. **Song/Live**
2. **Toggle Playing Tracks**
3. **Toggle Menu**
4. **ALSA/JACK Modes**
5. **Song Progress Bar**
6. **Time Display Selection**
7. **Mute Group Learn**

1. Song/Live. This new button allows the Song mode to be in force even if the **Song Editor** does not have the focus of the application. However, if the **Song Editor** does have focus, it overrides this button, to preserve expected behavior. There is also a configurable hotkey associated with it, which defaults to F1, and is configurable in the "rc" file and the **File / Options / Ext Keys** page.

2. Toggle Tracks. This button changes the status of all of the *playing* tracks, reversing the mute status of each pattern that is playing. The next click will then unmute only those tracks. Because it can be confusing, this button is disabled (not shown in the figure) in Song mode. There is also a configurable hotkey associated with it, called **Toggle mutes**, which defaults to F8, and is configurable in the "rc" file and the **File / Options / Ext Keys** page.

3. Toggle Menu. This button enables and disables the main menu of the main window. Disabling it allows additional hotkeys to be used without calling forth menu entries. There is also a configurable hotkey associated with it, called **Menu mode**, which defaults to F3, and is configurable in the "rc" file and the **File / Options / Ext Keys** page.

4. ALSA/JACK Modes. This button used to be just a label, but now it can help set the ALSA versus JACK modes, including JACK transport and native JACK MIDI playback and recording. When clicked, it brings up the JACK connection page from the **File / Options** dialog. The hot-key for this button is **Ctrl-P**.

5. Song Progress Bar. The **Song Progress Bar** is also known as the "main time" bar. This bar shows a number of small black cursors ("pills") that show the progress of the song through the various patterns. For short patterns, the progress is fast. For patterns that last longer, the progress is slow. The whole field flashes in time with the beat. This field shows that something is going on. It can also indicate the relative lengths of the various patterns.

Also included is a numeric representation of the "BBT" (bar:beat:ticks).

Note that the individual pattern boxes in the main panel, for patterns that are not empty, have their own moving progress cursor, a vertical line in each box. By default, this progress line is black, but it can be changed to other colors via a "user" configuration file entry in the [user-interface-settings]

section. Set the `progress_bar_colored` item to a value ranging from 0 (black) to 6 (dark cyan). There is also a `progress_bar_thick` item to enable a thicker progress bar, for better visibility.

6. Time Display Selection. The **Time Display Selection** is also known as the "main time" bar. This button toggles between the states of **BBT** (bar:beats:ticks) and **HMS** (hours:minutes:seconds).

7. Mute Group Learn. This button is also known as the "L" button. Click this button, and then press a mute-group key to store the mute-state (whether armed or unarmed) of all the patterns with in that key. In addition to clicking this button, one can also press the **Ctrl-L** combination (analogous to the **Ctrl-E** keystroke that brings up the Song Editor). When in group-learn mode, the **Shift** key cannot be hit, so the group-learn mode automatically converts the keys to their shifted versions. This feature known as *shift-lock* or *auto-shift*.

See the **File / Options / Keyboard** menu entry to bring up the dialog showing the available mute-group keys and the corresponding hot-key for the "L" button. This key is usually the **Insert** key. Unlike the button or the **Ctrl-L** key, this key must be held down while pressing the desired mute-group key. This is a clumsy thing on our main keyboard... one must press and hold **Shift-Fn-Insert** to get the **Insert** key, and then also press the desired mute-group key. A real knuckle-buster! We have our own alternate setup (stored in the file `sequencer64.rc.example`. And we've also added the "shift-lock" feature for this reason.

Group-learn is a modifier key to be pressed just before pressing the desired group key, and the group on/off keys are there to enable each group, *not* to toggle group states.

To set up the mute groups, press the 'L' button, and then press a key on the keyboard to 'learn' or 'save' the preset. Looking at the list of keys assigned for these mute groups (in **File / Options / Keyboard**), the first bank of keys are "!", " ", "?", etc., and the second bank are "Q", "W", "E", etc. Note that these keys do not toggle patterns, but simply turn them on (they unmute them, i.e. arm them). If the key is valid, then the following prompt occurs:

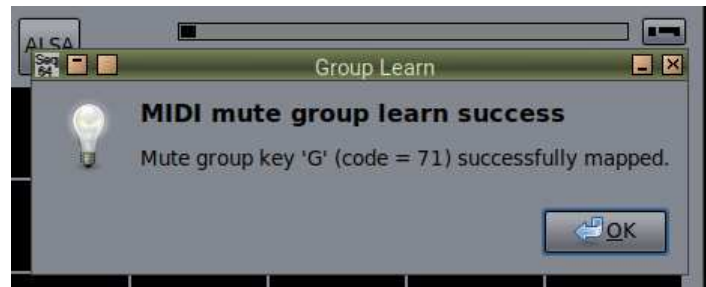


Figure 29: Group Learn Confirmation Prompt

When you ask the program to 'learn' the key, one cannot use the Shift key, so one normally could not use the "!" or other symbol keys. In fact, the process stops as soon as the Shift key is pressed:

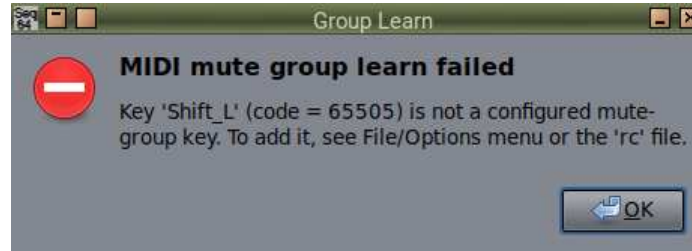


Figure 30: Group Learn Failure Prompt (Shift Key)

To avoid this issue with the **Shift** key, *Sequencer64* now "shift-locks" the keys automatically while group learn is in progress, so that none of the keys, whether letters or the punctuation characters above the numbers, need the **Shift** key to be held, to learn them. Thus, there is now no need to use the **Caps Lock** is **On** before starting the "learn" process. We tend to map the **Caps Lock** key as the *true* Control key, so that **Caps Lock** is no longer available anyway (it is one of the most useless keys ever).

Remember, though, that once learned, the **Shift** is then needed to call up the mute-group that was learned.

There is another way for mute-group learn to fail. With the recent ability of *Sequencer64* to increase the set size via the `--option sets=8x12` (for example), there can be fewer than 32 mute-groups available. This can be seen by viewing **File / Options / Keyboard** when larger set-sizes are in force:

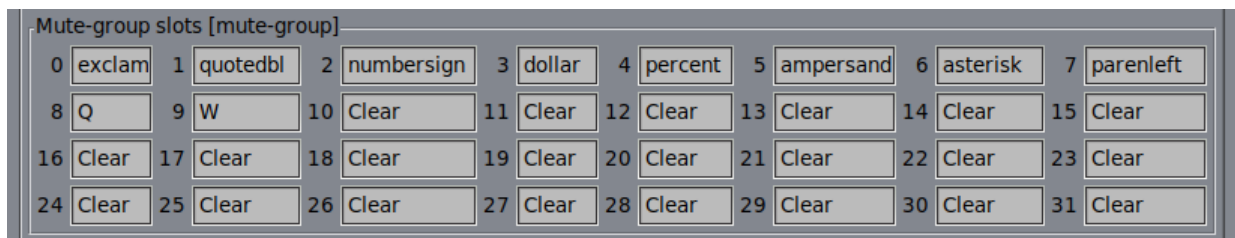


Figure 31: Group Learn Keys With Larger Set Size

Note that only 10 mute-groups (0 to 9) are available with an 8x12 set size. Groups 10 and above are not available, and this is indicated by the word "Clear". Don't worry, though, all of the mute-group key settings still exist, and are still present in the "rc" configuration file in the `[keyboard-group]` section.

But when one attempts a group-learn using one of the unavailable keys, an error occurs, as shown in the following prompt.



Figure 32: Group Learn Limit Prompt

This prompt also appears if one tries to use the shifted version of an unavailable mute-group key to toggle patterns; this makes it obvious what has gone wrong.

At some point in the future, we may allow a much larger number of sets, so that all 32 mute-groups are always available. We have to think hard about that enhancement, however.

One can configure the MIDI settings in similar ways by assigning MIDI commands to arm or toggle loops, using the 'on' option in the "rc" file. See section 9.1 "Sequencer64 "rc" File / MIDI Control Section" on page 109.

One can set the playing status of up to 32 previously defined mute/unmute patterns (groups) in the active screenset, similar to hardware sequencers. One can mute-unmute (according to the group definition) all loops in the playing screenset, which is the only one that can have sequences playing if a mute group is selected (like a live sequencer).

This arming is done either by one of the *group arm* keys or by a MIDI controller, both assigned in the `./config/sequencer64/sequencer64.rc` or `./seq24rc` files, and easily modified in the **File / Options / Keyboard** tab. These characters can be shown in each pattern (and in 0.9.11 and above, no matter which screenset is active).

A mute/unmute pattern (group) is stored by holding a *group learn* key (**Insert** by default) while pressing the corresponding *group arm* key. There are also keys assigned to turn on/off the group functionality. Remember that groups work with the playing ("in-view") screen set. One must change the screenset and give it the command to make it the playing one (some set the **Home** key for this purpose). So, for example, if one sets **A** to turn on the patterns in slots 1 and 2 in set 0 (the first set), then pressing **A** in another set will arm the patterns in the same relative location in that set. This setup is flexible, but takes some thought. One can set up a number of mute-groups, and decide to use them for all sets, or mentally allocate one mute-group per set. Please note that a mute-group key does not *toggle* the saved armed patterns... it can only turn them on.

Everything is configurable in the "rc" file.

3.2 Patterns / Main Panel

The main panel of the Patterns window provides a grid of empty boxes, each box delimited by brace-like lines at left and right. Each filled box represents a loop or pattern. One sees only 32 loops at a time in the main panel (but many more than 32 loops can be supported by *Sequencer64*). This group of 32 loops is called a "screen set", as discussed in section 13.1.16 "Concepts / Terms / screen set" on page 160. One can switch between sets by using the `[` and `]` keys on the keyboard, or by using the spin-widget-driven, labelled **Set** interface item, or by hitting the (default) **Home** key to make it the playing screenset, or by hitting **Page-Up** or **Page-Down** with the pattern window in keyboard focus. There are a total of 32 sets, for a total of 1024 loops/patterns. Only one screen set can be controlled at a time, according to other notes we have found; have not yet tried to verify this assertion. But any number of screensets can be playing at the same time.

Note that the Page Up and Page Down keystrokes, and their counter parts in **File / Options / Keyboard / Control Keys / Screenset Up** and **Screenset Down**, can be used in lieu of the **Set** spinbutton.

It is important to note that keystroke control of the screen-set will wrap-around in screen-set values (i.e. screen-set down at 0 results in screen-set 31, and screen-set up at 31 results in screen-set 0). However, the spinbuttons will stop up at 31 and stop down at 0. We consider this a feature rather than a bug, at this time.

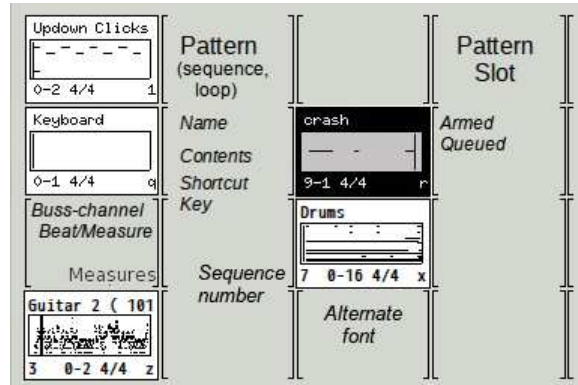


Figure 33: Patterns Panel, Main Panel Items

The individual items annotated in this figure are described in section 3.2.2 "Pattern" on page 50, in more detail. The slot at the bottom left of this figure shows some new features:

- The sequence number appears at the bottom left of the slot.
- The buss number (re 0) and the channel number (re 1) appears to the right of the sequence number, in the format "0-1".
- To the right of that, the time signature ("4/4") appears, at the bottom.
- The hot-key for muting/unmuting the pattern appears next, at the bottom right of the slot.
- The title of the sequence appears at the top left of the pattern slot.
- The length of the sequence, in number of measures (bars), appears at the upper right of the slot.
- Notice the default alternate font, which has a little more body than the *Seq24* font.

Observe that feature in the first figure of the next section. The two main items are the empty *pattern slot*, and the slot filled with a MIDI *pattern*:

1. **Pattern Slot**
2. **Pattern**

3.2.1 Pattern Slot

An empty box is a slot for a pattern. If a pattern is present in the slot, the top line will show the title of the pattern, and the number of measures in the pattern. The latter is not shown on some of the figures in this manual, a lack we will have to rectify someday.

A pattern can show a number of different statuses based on the coloring of elements in the pattern slot.

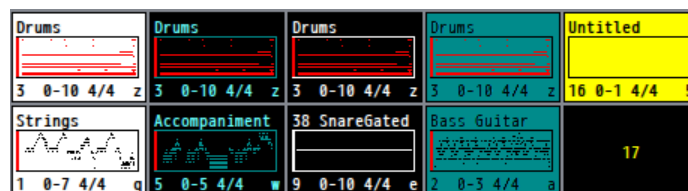


Figure 34: Various Status of Pattern Slots

(Not shown in the figure are the gray pattern colors resulting from queueing and one-shot queueing, nor is the number-of-measures number shown.) The colors have meaning:

- **Empty background.** Whether the classic gray pattern of *Seq24*, or the many patterns of *Sequencer64*, including all black with yellow sequence numbers, this slot coloring indicates that the slot is unused.
- **White background.** Unarmed (muted) patterns show black text on a white background.
- **Black background.** Armed (unmuted) pattern. If the text is yellow, it is a pattern with no MIDI events, but is armed. Note that armed/unmuted patterns can be exported if they have a layout in the Song Editor.
- **Yellow background.** A pattern with no MIDI events, just textual MIDI information. If armed (uselessly), it is yellow text on a black background (not shown).
- **Cyan background, black text.** An unarmed pattern currently being edited in a pattern editor or event editor. Or, if an SMF 0 MIDI file was just opened or imported, this color combination indicates the SMF 0 format track with all of the data in the song, which only occurs in slot 16 (unless the user then dragged it to another slot).
- **Black background, cyan text.** An armed pattern currently being edited in a pattern editor or event editor. Or an armed SMF 0 format MIDI sequence.
- **Red events.** Indicates a pattern for which the new transpose feature is disabled. The white, black, and cyan background have the same meanings as in the other items for statuses of unarmed, armed, and currently being edited.

As of version 0.95, the user can also apply coloring to each sequence. This feature was adopted from *Kepler34* ([9]). Here is the new pattern menu for sequence color:

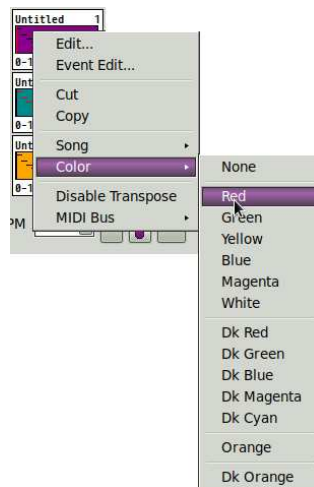


Figure 35: Sequence/Pattern Color Menu

Here is a sample of the coloration as it appears in the patterns panel and in the song editor:

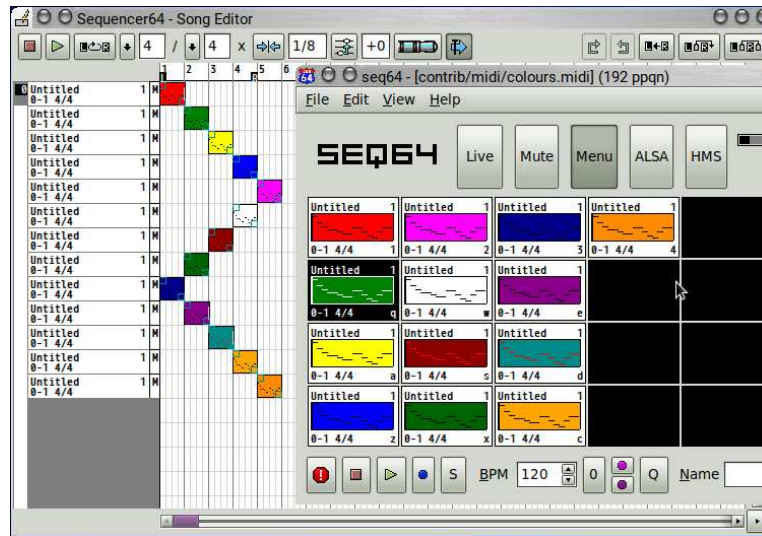


Figure 36: Sequence/Pattern Coloration

By right-clicking on an empty box one brings up a menu to create a new loop, as well as some other operations:

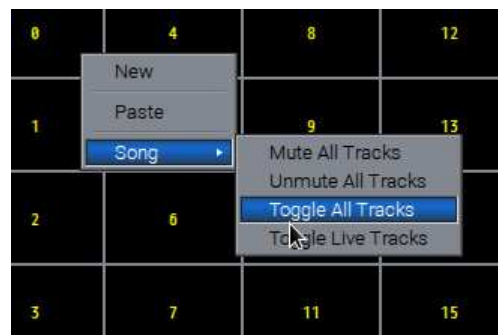


Figure 37: Empty Pattern, Right-Click Menu

1. **New**
2. **Paste**
3. **Song**

- Mute All Tracks
- Unmute All Tracks
- Toggle All Tracks
- Toggle Live Tracks

1. New. Creates a new loop or pattern. Clicking this menu entry fills in the empty box with an untitled pattern, and brings up the Pattern Editor so that one can fill in the new pattern.

In addition to right-clicking and selecting **New**, the user can double-click on the empty slot, to bring up a new instance of the sequence editor. For the double-click, the effect can be a bit confusing at first, because it currently also toggles the arming/mute status of the slot quickly twice (leaving it as it was), as well. It might take some getting used to, but we miss it when using *Seq24*.

A new feature is hitting the equals ("=") key, then hitting a pattern shortcut key (hotkey), to bring

up a new sequence or edit an existing one in a pattern editor. Another new feature is hitting the minus ("−") key, then the hotkey, to bring up the event editor. The configuration file settings for the the '=' and '-' keys can be altering in the **File / Options / Keyboard** tab.

When an unarmed (muted) pattern is first brought up for sequence editing (or event editing), the slot in the main window is now highlighted, using black text on a cyan background, as being the "currently-edited" slot. (This is the same background used to indicate the original track in an SMF 0 to SMF 1 conversion.)

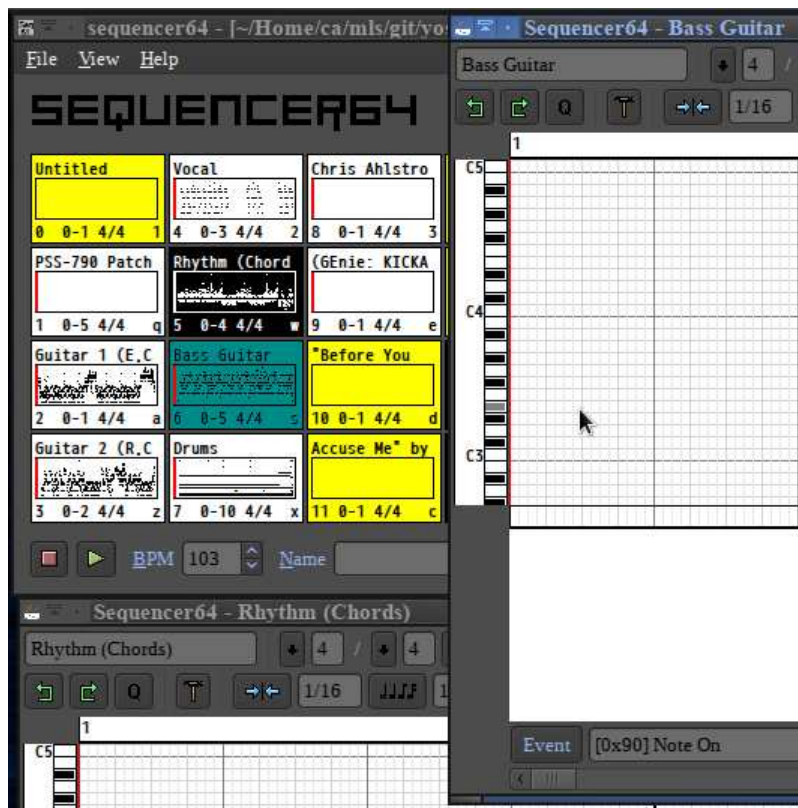


Figure 38: Currently-Edited Pattern, Unarmed

If the currently-edited sequence is armed (unmuted), then the highlighting is reversed (cyan text on a black background), and resembles the highlighting for an armed sequence (which is white text on a black background).

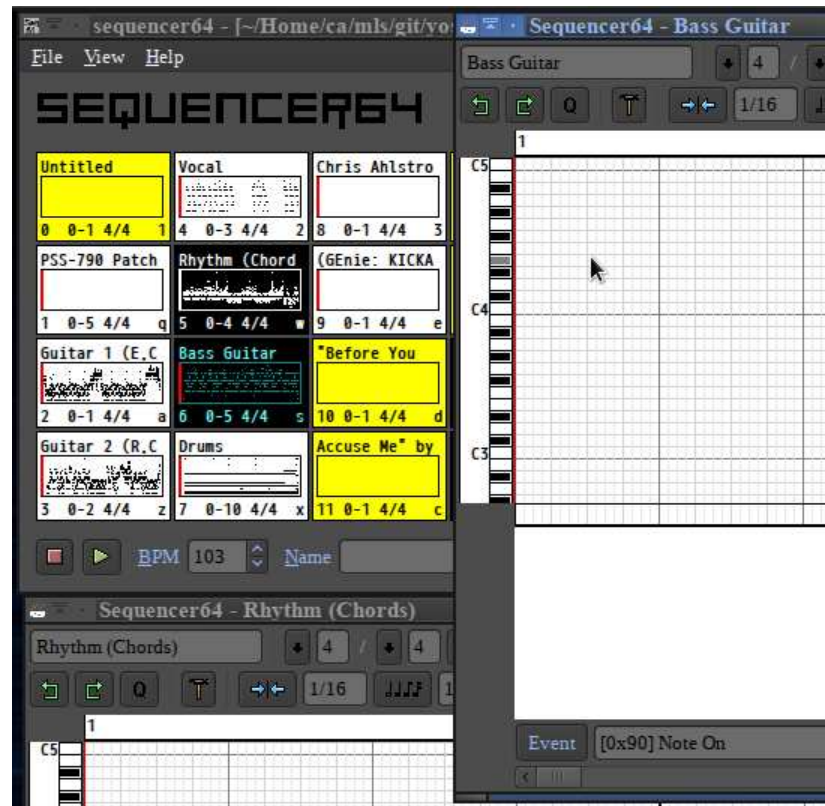


Figure 39: Currently-Edited Pattern, Armed

If more than one sequence or event editor is brought up, only the slot for the last one to have focus is highlighted. Note that this highlighting also applies to the (new) Event Editor.

2. Paste. Pastes a loop or pattern that was previously copied. Also note that there is no **Ctrl-V** key for this operation in the main window.

3. Song. The **Song** items are described later, in reference to [figure 42 "Existing Pattern, Right-Click Menu, Song"](#) on page 53.

3.2.2 Pattern

A filled pattern slot is referred to informally as a *pattern* (or *loop*, or *sequence*). A pattern is shown in the Pattern windows as a filled box with the following items of information in it. Examine [figure 33 "Patterns Panel, Main Panel Items"](#) on page 46; it shows these items annotated for clarity.

- **Name.** This line contains the name or title of the pattern, to help reference it when juggling a number of patters.
- **Pattern Length.** If the option to show pattern hot-key is enabled, the length of the pattern, in measures, is shown in the upper right corner of the pattern slot. This feature is useful when recording tempo events that will increase the length of the tempo track.
- **Contents.** The contents of the pattern provide a fairly detailed and distinguishable representation of the notes or events in the pattern. Also, when the song is playing, a vertical bar cursor tracks the position of the playback of the pattern or loop; it returns to the beginning of the box every

time that pattern starts over again. With *Sequencer64*, an imported empty pattern will no longer needlessly scroll. However, if a pattern has even a single event (say, a program change), it will scroll.

- **Sequence Number.** If the option to show the sequencer number is set in the **File / Options / Keyboard** section (see section 2.2.7.3 "Menu / File / Options / Keyboard" on page 27, the this number is shown at the bottom left of the pattern slot.
- **Bus-Channel.** This pair of numbers shows the the MIDI buss number, a dash, and the MIDI channel number. For example, "0-2" means MIDI buss 0, channel 2.
- **Beat.** This pair of numbers is the standard time-signature of the pattern, such as "4/4" or "3/4". The first number is the beats-per-measure, and the second is the size of the beat, here, a quarter note.
- **Shortcut Key.** If the display of shortcut keys is enabled (see section 2.2.7.3 "Menu / File / Options / Keyboard" on page 27), then the key noted in the lower-right corner of the pattern can be pressed to toggle the mute/unmute status of that pattern. This action is an alternative to left-clicking on the pattern.
- **Progress Cursor.** At the left of each box is a vertical line, waiting for playback to start so that it can move through the pattern, again and again.
- **Armed.** See figure 33 "Patterns Panel, Main Panel Items" on page 46; it shows a black and white pattern. The black color indicates that the pattern is armed (unmuted), and will play if playback is initiated in the pattern window in live mode. An item is armed/disarmed by left-clicking on it. If the Shift key is held while left-clicking on a pattern, then the armed/unarmed state of every other active pattern is toggled. This feature is useful for isolating a single track or pattern.
- **Queued.** That same pattern also shows that it is queued, which means that it will toggle its playing status when the pattern next begins again.
- **Alternate font.** Later builds of *Sequencer64* are now built with a new font. See figure 33 "Patterns Panel, Main Panel Items" on page 46. It shows the new font. The old font can be selected in the "user" configuration file, and is also selected automatically if *Sequencer64* is run in the *legacy* mode.
- **Sequence number.** Later builds of *Sequencer64* are now built with the option to also show the sequence number in the pattern box, if the "show sequence numbers" option is on. This option can be set in the "user" configuration file. See figure 33 "Patterns Panel, Main Panel Items" on page 46. It shows an example of the sequence number, using the new font.

Left-clicking on an filled pattern box will toggle the status of the pattern between muted (white background) and unmuted (black background). If the song is playing via the main window, toggling this status makes the pattern stop playing or start playing. Note that the armed status can also be toggled using hot-keys.

Also note that, if the Song Editor is the active window and was used to start the playback, the pattern boxes will toggle between the muted/unmuted states as the music plays, and the pattern is active or inactive at the point of playback. (The Song Editor acts as a list of triggers).

By right-clicking on an already-filled box, one brings up a menu to allow one to edit a existing one, or perform a few other actions specified in the context menu. Here is that menu:

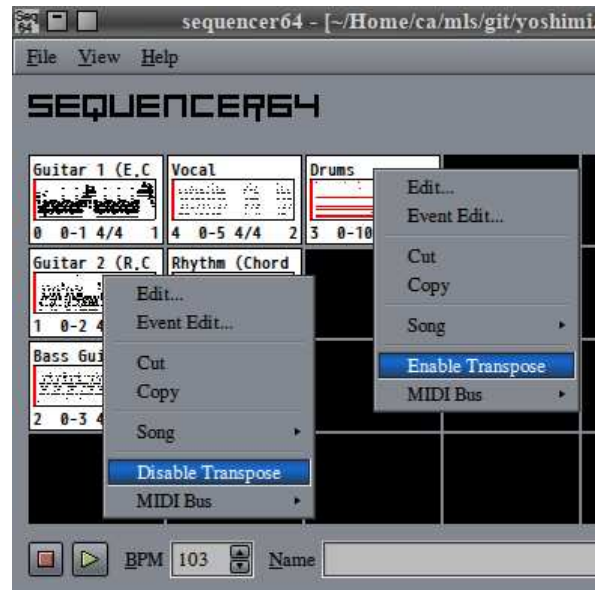


Figure 40: Existing Pattern, Right-Click Menus

Here one can choose to edit the pattern, cut and copy the pattern, set the MIDI bus/channel, and more. One can also clear all performance data for the pattern.

1. **Edit...**
2. **Event Edit...**
3. **Cut**
4. **Copy**
5. **Song**
6. **Enable or Disable Transpose**
7. **MIDI Bus**

1. Edit.... Edits an existing loop or pattern. Clicking this menu entry brings up the **Pattern Editor** so that one can modify the existing pattern by click-dragging new notes in a piano roll user-interface. See figure 53 "Pattern Edit Window" on page 63. Also known as the "sequence editor".

New: In addition to right-clicking and selecting **Edit...**, the user can double-click on the empty slot, to bring up the sequence editor.

New: Another way to bring up a pattern in the pattern editor is to click the **equal** key and then the pattern's shortcut key. For example, "**= q**" will open up the editor for the pattern with the hot-keys **= q**. The Equals key (**=**) is the default key that does this action. This key can be changed by modifying the **File / Options / Keyboard / Control keys / Pattern Edit** item.

2. Event Edit.... **New:** Edits an existing loop or pattern, but using a detailed event editor that shows events as text and numbers, and allows editing them as text and numbers. Clicking this menu entry brings up the **Event Editor** so that one can view and modify the events in the existing pattern. See figure 53 "Pattern Edit Window" on page 63.

New: Another way to bring up a pattern in the event editor is to click the **minus** key and then the pattern's shortcut key. For example, "**- q**" will open up the event editor for that pattern. The Minus key (**-**) is the default key that does this action. This key can be changed by modifying the **File / Options / Keyboard / Control keys / Event Edit** item.

There are two things to note about the Event editor. First, this editor is not the same as the **event** pane in the pattern editor – the new event editor shows all events at once, and shows them only in text/list format. Second, this editor is very basic, meant for viewing MIDI events and making some minor edits or deletes on them. See section 6 "Event Editor" on page 93, for more information.

Now, in order to simplify the application, and avoid editing a pattern in two different dialogs, if either the pattern editor or the event editor is active for a given sequence, the right-click sequence-slot menu leaves out the **Edit...** and **Event Edit...** menu entries. This trimmed menu looks like this:




Figure 41: Existing Pattern, Right-Click Menu Without Edit Entries

The old functionality was to have the **Edit...** menu entry simply raise the existing pattern editor to the top of the windows.

3. Cut. Deletes and copies an existing loop or pattern. Note that one can also drag-and-drop a pattern into another cell. Also note that there is no **Ctrl-X** key for this operation in the main window.

4. Copy. Copies an existing loop or pattern. The pattern can then be pasted elsewhere in the Patterns panel. See section 3.2.1 "Pattern Slot" on page 46. Also note that there is no **Ctrl-C** key for this operation in the main window.

5. Song. Clicking this menu entry brings up a small popup menu:



Figure 42: Existing Pattern, Right-Click Menu, Song

1. **Clear This Track's Song Data**
2. **Mute All Tracks**
3. **Unmute All Tracks**
4. **Toggle All Tracks**
5. **Toggle Live Tracks**

Clear This Track's Song Data This item is not available if the pattern is empty. Selecting this filled-box right-click menu item causes that box's loop/pattern to be removed from the song editor. This means that it disappears from the Song Editor window, and so will not be played when the song plays in Song mode.

Song / Mute All Tracks Selecting this filled-box right-click menu item causes the tracks in the Song Editor to be muted. Sometime it takes a few seconds for the user-interfaces to show this big change. This item mutes all tracks (or loops/patterns). It works when one has opened the Song Editor window and started playing in playback mode by starting play using that window.

So, let us assume the song is running in playback mode. The patterns that are active (unmuted) in by that playback window are shown with a black background in the main patterns window. If one right

clicks on a pattern cell and selects **Song / Mute All Tracks**, all those patterns will become white and be silenced. Eventually, the Song Editor window catches up and shows the "M" activated for all tracks.

Unmute All Tracks Provides the opposite functionality, making all tracks armed and audible. Selecting this filled-box right-click menu item causes the tracks in the song to be unmuted.

Toggle All Track Toggles the armed/mute status of all tracks. It doesn't matter if Live or Song Mode is in force.

Note that there is also a feature where a **Shift-Left-Click** on a pattern slot toggles the mute status of all of the other *tracks*.

Toggle Live Tracks Toggles the mute status of only the armed/unmuted tracks when in Live mode. Works only in Live mode. This operation unmutes all tracks that are currently unmuted. The statuses of these armed tracks are saved; when this operation is performed again, those tracks are unmuted, turned back on. This menu entry provides the same function as the **Mute** button in the main window.

6. Disable or Enable Transpose. This menu entry changes depending upon whether the new transpose feature is enabled or disabled for the sequence/pattern. Note that, if the events shown in the slot are red, this denotes that transpose is currently *disabled* for that pattern.

7. MIDI Bus. Selecting this filled-box right-click menu item brings up a list of the 16 MIDI output busses that *Sequencer64* supports:

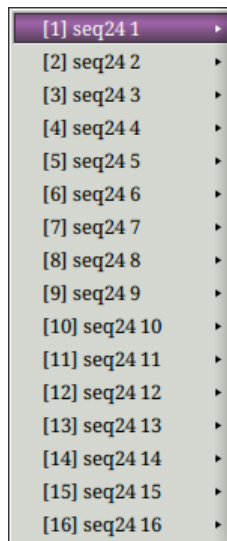


Figure 43: Existing Pattern, Right-Click Menu, MIDI Output Busses

New: Note that another way of specifying the busses is to supply the new `--buss n` option. This option is currently available only from the command line. It causes every pattern in the MIDI file to be allocated to that buss number when loaded, and when a new sequence/pattern is created. This option is meant for convenience or testing. If you save the file, it will then have that buss number as part of each track's data, which makes the song file just a little less portable.

For each of these buss items, another pop-up menu allows one to specify the MIDI output channel for that buss:




Figure 44: Existing Pattern, Right-Click Menu, MIDI Bus Ports

3.2.3 Pattern Keys and Click

This section recapitulates all the clicks and keys that perform actions in the Pattern windows. Some additional clicks and keys are noted here as well.

3.2.3.1 Pattern Keys

Each pattern in the patterns panel can have a hot-key or shortcut-key associated with it.

For each pattern, hitting its assigned shortcut key will also toggle its status between muted/unmuted (armed/unarmed). Below is the default grid that is mapped to the loops/patterns on the screen set. This grid can be changed in the Keyboard options tab, and is saved in the *keyboard-control* section of the "rc" file.

[1]	[2]	[3]	[4]	[5]	[6]	[7]	[8]
[q]	[w]	[e]	[r]	[t]	[y]	[u]	[i]
[a]	[s]	[d]	[f]	[g]	[h]	[j]	[k]
[z]	[x]	[c]	[v]	[b]	[n]	[m]	[,]

These characters are shown in the lower right corner of each pattern, as an aid to memory. These hot-keys can be modified.

With version 0.92.0, a new "shift" functionality is available for the mute/unmute hot-keys. Normally, pressing the 1 key will toggle sequence 0. If preceded by one slash key (/), then sequence 32 will be toggled. If preceded by two slash keys, then sequence 64 will be toggled. This supports using set sizes of 32, 64, and 96 patterns.




Figure 45: Patterns Panel, Shift-Key Pattern Toggle

This figure shows how we press `y`, `/y`, and `//y` to arm three patterns in this 96-pattern set.

The `[` and `]` keys on the keyboard switch between sets, either decrementing or incrementing the set number.

The left and right `Alt` keys are, by default, set up in the **File / Options / Keyboard / Snapshot 1** and **Snapshot 2** fields to be used as "snapshot" keys. Our preference is to use something that does not trigger desktop commands, perhaps `F11` or `F12`, or one of the keys in the keypad.

When one of these snapshot keys is pressed, the state of the patterns (which ones are armed versus unarmed) is instantly saved. While the snapshot key is held pressed, one can then change the state of the patterns (using the keyboard, *not* the mouse) to change how the song plays. When the snapshot key is released, the original saved state of the patterns is restored.

Holding `Alt` will save the state of playing patterns and restore them when `Alt` is lifted. The handling of `Alt` is often taken over by the window manager, so there could be a need to change these items to some other keys. For example, we have the *Fluxbox* window manager set up so that the `Alt` keys can be used for moving or resizing a window. Therefore, we use keypad keys for this purpose.

Holding the "queue" key and then hitting a pattern hot-key will queue an on/off toggle for a pattern when the end of the loop is reached. This is the "queue" functionality. This means that the change in state of the pattern will not take hold immediately, but will kick in when the pattern restarts. This pending state is indicated by coloring the central box of the pattern grey, as shown in the figure below.

Warning: We do **not** recommend using `Ctrl` or `Alt` keys for pattern control. They conflict with application or desktop settings. However, if one insists on such hot-key combinations, one can use the new **Menu** button in the main window to disable the menu, which makes those keystrokes more safely available. The `Super` key can also be used, if not already used by the desktop environment. Also available are some of the function keys, and, if available, the keypad keys. These can be configured in **File / Options / Keyboard** and **File / Options / Ext Keys**.

Note that queueing can also be used to turn a pattern *off* at the end of a pattern. Also note the "keep queue" functionality and the "one-shot queue" functionality described below.

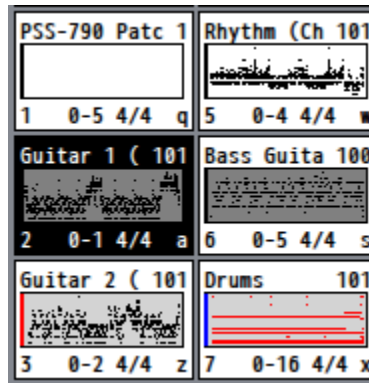


Figure 46: Pattern Coloration when Queued

This figure shows the coloring for queueing in the top two patterns with dark grey backgrounds. At the end of the pattern, the left top pattern will turn off, and the right top pattern will turn on.

The bottom two patterns show the light-grey coloring used to show a "one-shot" queue. The one-shot queue can only turn a pattern on, and it will force the pattern off after one play.

Queue also works for mute/unmute pattern sets ("groups"); in this case, every sequence will toggle its status after its individual loop ends.

Of course, if the **Ctrl** key is used to manage the GUI (e.g. **Ctrl-Q** will unceremoniously quit the application), so one will usually want to change this key to something else in the **File / Options / Keyboard / Queue** field. The **Super** key (i.e. the **Mod4** or **Windows** key) is a good candidate to substitute for the **Ctrl** key, unless one has (like the author) configured the window manager to use the **Super** key to manipulate windows and applications (*laughter ensues*). However, we have found that one can also use normal keys to enable queueing. For example, the minus key or the keypad's slash key can be used, with no noticeable flickering due to the keyboard repeat rate.

Pressing the "keep queue" hot-key assigned in the "rc" file activates a permanent queue mode. In this mode, clicking a pattern key immediately turns on queuing, instead of mute/unmute. Keep-queue persists until one clicks the normal queue function hot-key, or changes the active (viewed) screen-set. After pressing the "keep queue" hot-key, individual pattern toggles are queued rather than happening immediately. While in queue mode, pressing a patterns hot-key, or clicking on the pattern, queues that pattern to change state at the beginning of the next loop. "Keep queue" mode is cancelled by pressing the normal queue hot-key.

This hot-key can be changed in the **File / Options / Keyboard / Keep queue** field. Also note the "queued replace/solo" functionality, described a bit later.

Thanks to the *Kepler34* project, we now have "one-shot queue" functionality. This functionality queues a pattern up for unmuting only, and, once the pattern has played, it is automatically muted. This process is easier than having to unqueue the pattern manually before the next playback.

This hot-key can be changed in the **File / Options / Ext Keys / One-shot queue** field.

Note that there is also a "replace" hot-key, which is the left **Ctrl** key by default (which cannot work, because *Sequencer64* uses **Ctrl** as a way to access a lot of other functions, interfering with its use as a hot-key).

Replacement is a form of muting/unmuting. When the "replace" hot-key is pressed and held while clicking a pattern or clicking that pattern's hot-key, that sequence is unmuted, and all of the other sequences are muted. Again, **Ctrl** is a very inconvenient default, so an alternative key mapping should be set up in the "rc" file via the **File / Options / Keyboard** tab. Note that the "replace" functionality is a form of "solo". Also note that the "replace" functionality is also implemented via MIDI control, where the MIDI control can be activated, but then the user has to select the desired sequence.

Sequencer64 provides an extension to the replace/solo functionality that is called "queued-replace" or "queued-solo". In this feature, when the "keep queue" function is activated, the replace function is queued so that it does not occur until the next time the patterns loop. And queued-replace provides a form of snapshot, limited to the *current* screen-set. Here are the steps:

1. Start playback with some patterns on.
2. Press and release (click) the "keep queue" hot-key. This puts the application into "queue" mode. There is no visual indication (yet) of this mode.
3. Now press and hold the "replace" hot-key.
4. Click the desired pattern hot-key. Observe that it comes on, or stays on, and that the other playing patterns show the "queued" color (grey). At the end of the loop, they turn off, and the "replace" pattern is now soloed.
5. Click the same pattern hot-key again. Observe that the other patterns that were toggled off are now queued to be toggled on at the next loop. Steps 4 and 5 can be repeated endlessly.

- To clear (end) the "queued-replace" mode, click the normal "queue" hot-key. Also, changing the active screen-set ends "queue-replace" mode. It does *not* end normal queue mode, to preserve the behavior found in *Seq24*. One needs to clear the queue mode in order to select another pattern to solo.

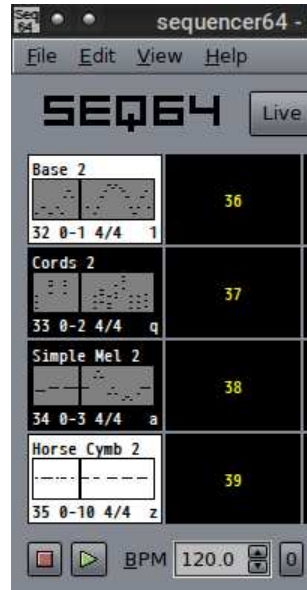


Figure 47: Queued-Replace (Queued-Solo) In Action

Before clicking the "keep queue" key, patterns 33 ("q") and 34 ("a") are unmuted, while the desired replace pattern, 32 ("1") is off. Then the user presses (and holds) the "replace" key, then clicks the "1" key. This puts all unmuted patterns, plus the muted replace pattern as well, into queue mode, as shown by the grey panels. When the progress bar reaches the end of the pattern, pattern 32 will go on, and patterns 33 and 34 will go off.

Note that, if the replace-pattern is already on, it is not queued, as there's no need to turn it on.

If, while in queue mode, the replace key is held and "1" is pressed again, the other patterns will be queued, and will turn on again. Thus, the solo status of the replace pattern can be toggled at will, until queue mode is exited by pressing and releasing the normal "queue" key.

If the replace key is *not* held down, and another pattern's replace hot-key is pressed, that pattern will be queue normally.

If one wants to change the solo functionality to a different pattern, simply hold the replace key and click on a different pattern. The new arrangement of soloing is memorized. One can clear the queue mode by clicking the normal queue key.

There are more keys defined in the **Keyboard** dialog, and it is worth figuring out what they do, if not documented here. For a couple of short, but good, video tutorials about using arming, queueing, and snapshots, see references [35] and [36].

Also note that there is a more true "Solo" functionality in the Patterns Panel and the Song Editor. To truly "solo" a pattern, move the mouse cursor over the pattern, hold the **Shift** key, and left-click the pattern. This will turn off all the other patterns, so that the selected pattern is the only one playing. Holding the **Shift** key and clicking the same pattern again will unmute all of the other patterns.

3.2.3.2 Pattern Clicks

Left-clicking on a pattern-filled box will change its state from muted (white background) to playing (black background) when the sequencer is running.

By clicking and holding the left mouse button on a pattern, one can drag it to a new location on the grid. The box will disappear while dragged, and reappear in the new location when dropped. However, note that a pattern cannot be dragged if its Pattern Editor window is open.

Right-clicking a pattern will bring up the appropriate context menus, as discussed earlier, depending on whether the pattern box is empty or filled.

Middle-click does nothing when the mouse rests inside a pattern box.

3.3 Patterns / Bottom Panel

The bottom panel of the Patterns window provides way to control the overall playback of the song. It has changed quite a bit over the last few versions of *Sequencer64*, and we have not yet caught up with the diagrams. Refer to the diagram of the whole window, for now.

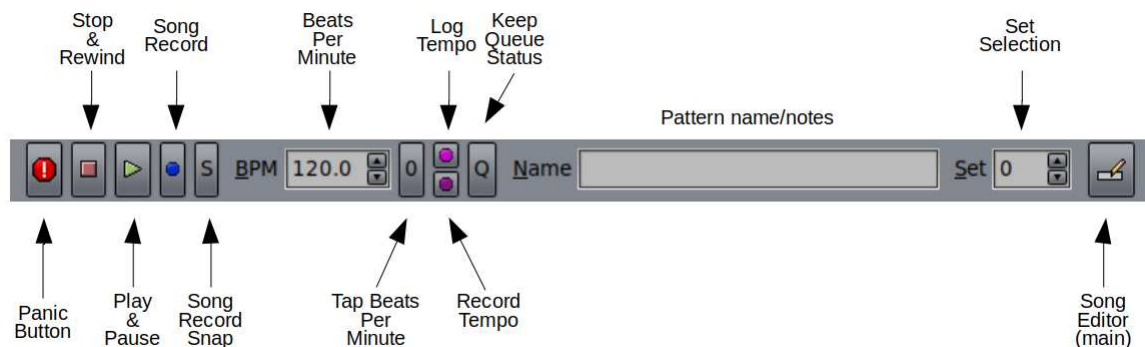


Figure 48: Patterns Panel, Bottom Panel Items

This figure shows a number of new items.

1. **Panic!** (new)
2. **Stop**
3. **Play and Pause**
4. **Song Record** (new)
5. **Song Record Snap** (new)
6. **BPM**
7. **Tap Tempo**
8. **Log Tempo**
9. **Record Tempo**
10. **Keep-Queue Status**
11. **Name**
12. **Set**
13. **Toggle Song Editor**

1. **Panic!.** This new button stops the song and sends MIDI Off messages on all notes.

2. Stop. The red square button stops the playback of the song and all its patterns. The keystroke for stopping playback is the **Escape** character. It can be changed to **Space**, so that the space-bar then becomes effectively a playback toggle key.

3. Play and Pause. The green triangular button starts the playback of the whole song. The keystroke for starting playback is the **Space** character by default.

A new feature is that the Play button can be used as a Pause button. When the Play button is clicked, the button icon changes to a Pause icon:



Figure 49: Patterns Panel, Pause Button

Note that a corresponding Pause key (by default, the period) has also been defined. (The pause feature can be removed by rebuilding the application after configuring with the `--disable-pause` option.)

4. Song Record. Song-recording is a new feature of *Sequencer64* adopted from the *Kepler34* project. This feature, when activated, takes live muting changes and records them as triggers in the Song editor. The default hot-key for this function is **P**. At this time, this feature does not honor queueing... rather than waiting until the end of the pattern when the queueing takes effect, the trigger recording starts immediately. Something to fix.

5. Song Record Snap. This button toggle snapping the beginning and end of a recorded trigger to the nearest beat. There is no hot-key for this button at this time.

6. BPM. The spin widget adjusts the "Beats Per Minute" or BPM value. The range of this field is from 1 bpm to 600 bpm, with a default value of 120 bpm. Although this field looks editable, it is not. Most keystrokes that are entered actually toggle one of the pattern boxes. However, the following keys can also modify the BPM in small increments: The **semicolon** reduces the BPM; The **apostrophe** increases the BPM. Also, if one right-clicks on the Up button, the BPM advances to its largest supported value, and if one right-clicks on the Down button, the BPM advances to its lowest value.

As a new feature, the precision of the BPM value can be set to 1 or 2 decimal places, and the increment values for the step size (small) or page size (large) of the BPM spinner can be configured in the "usr" file. See section [10.4 "Sequencer64"usr" File / User MIDI Settings](#) on page [140](#); it describes the precision and increment options more fully.

The following figure shows the appearance of the BPM field with different precision values:

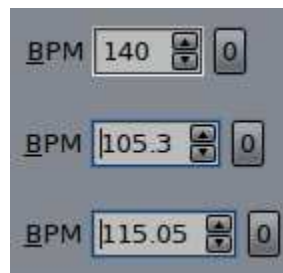


Figure 50: Patterns Panel, BPM Precisions

7. Tap Tempo. This new control allows one to click it in time with a tune and set the tempo based on the tempo of the clicks. Once clicked, the label of this button increments with every click, and the

BPM field updates to display the calculated tempo. If the user stops tapping for 5 seconds, the label reverts to 0, the BPM value keeps its final value, and the user can try tapping the tempo again. The tapping function can also be performed using the keystroke defined in **File / Options / Ext Keys / Tap BPM**. It defaults to the F9 key.

8. Log Tempo. This light-magenta button, when pressed, logs the current tempo at the current playback spot as a Set Tempo meta-event, but only in the first track (pattern slot #0), or the alternate tempo track if that is defined, and only if it is active. According to the MIDI standard, such events should be present *only* in the first track, and so *Sequencer64* follows this rule, and also makes tempo events officially supported. They can be edited in the pattern editor or in the event editor. The main or global tempo is not written to the tempo track; it is stored in a SeqSpec section. See section 8 "Sequencer64 Meta Event / SysEx Support" on page 105, for more information.

9. Record Tempo. This dark-magenta button becomes light-magenta when activated, and turns on the recording of any tempo changes made in the BPM spinner. If the spinner is held down indefinitely, a ramping stream of tempo events is created. If the time exceeds the current length of the tempo track, then the length of the track is automatically increased. Note that these tempo events will not have any effect on playback speed unless the tempo track is unmuted.

10. Keep-Queue Status. This item is the **Q** button. It provides a visual way to know the current state of keep-queue, and is activated either by clicking on it or by pressing the assigned keep-queue key.

11. Name. Each of the 32 available screen sets can be given a name by entering it into this field.

12. Set. This spin widget selects the current screen set. The values in this field range from 0 to 31, and default to 0. Although this field looks editable, it is not.

13. Toggle Song Editor. Pressing this button toggles the presence on-screen of the Song Editor. The **Ctrl-E** keystroke can also be used.

3.4 Patterns / Multiple Panels

If *Sequencer64* is built with the `--enable-multiwid` option (the default), this defines the `SEQ64_MULTI_MAINWID` macro, and allows for multiple main windows showing more than one set at a time. The default is to show the usual single "mainwid".



Figure 51: Patterns Panel, with Multiple Panels

Also note that either one spinner for all, or one spinner for each, is available. The latter is the "independent" mode. Note that it is possible, in this mode, to show the same set in two different "mainwids", but this is not recommended, as there may be minor unavoidable issues with that.

Note that Page Up and Page Down keystrokes, as well as their configurable counterparts in **File / Options / Keyboard / Control Keys / Screenset Up** and **Screenset Down**, apply only to the top leftmost "mainwid". Of course, if the "mainwids" are synced, then all are affected by these keystrokes.

In multi-wid mode, each "mainwid" frame shows the corresponding set number and, if present, the set notepad text for each "mainwid" set.

See section 11 "Sequencer64 Man Page" on page 145, for how the `-o wid=3x2,i` option can be used to set this mode, and section 10.3 "Sequencer64 "usr" File / User Interface Settings" on page 136, for how these settings can be made permanent in the "usr" file. In that file, the options modified are `block_rows` and `block_columns`.

3.5 Patterns / Variable Set Size

This option, informally known as "variset", allow some changes in the set size and layout from the default $4 \times 8 = 32$ sets layout. The row count can be set from 4 to 8, and the column count can be set to 8 to 12. Note that the set size can only be *increased* by these settings.

Warning: `seq24` was fairly hardwired for supporting 32 patterns per set, and there are still places where that is true. Thus, consider this option to be experimental.

Also see section 11 "Sequencer64 Man Page" on page 145, for how the `-o sets=8x8` option can be used to set this mode, and section 10.3 "Sequencer64 "usr" File / User Interface Settings" on page 136, for how these settings can be made permanent in the "usr" file. In that file, the options modified are `mainwnd_rows` and `mainwnd_cols`.



Figure 52: Patterns Panel, 8 x 8 Layout

Generally, it is recommend to stick with the 4x8 (32 patterns/set), 8x8 (64 patterns/set), and 8x12 (96 patterns/set). This works best with the existing set of 32 hot-keys.

4 Pattern Editor

The *Sequencer64 Pattern Editor* is used to edit and preview a pattern, as well as to configure its buss and channel settings. Please note that the **Qt 5** user-interface (which will eventually supercede the Gtkmm-2.4 user-interface) provides an **Edit Tab**, which has limited functionality, and an external window interface, which is on par with the Gtkmm-2.4 version.

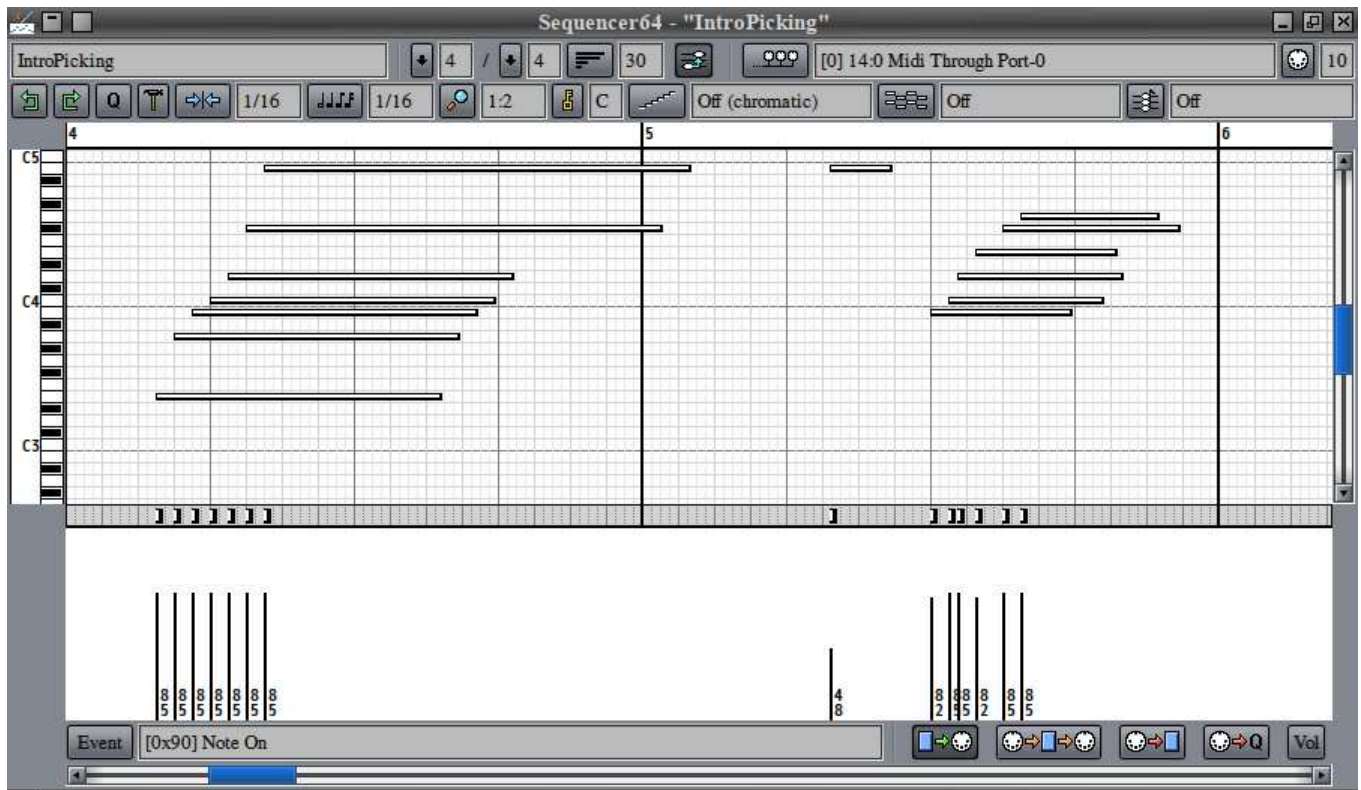


Figure 53: Pattern Edit Window

Not shown in this figure are:

- The sequence number show as part of the updated window title, which now shows the application name (e.g. "seq64" versus the old "Sequencer64" title).
- The sequencer number is now shown to the left of the sequence/track name.
- The new **LFO** button in the bottom panel.
- The new **Rec Type** button in the bottom panel.

Both are described later. See [figure 69 "Pattern Editor, Bottom Panel Items"](#) on page 81.

This dialog is complex. For exposition, we break it into some common actions, a first panel, a second panel, a bottom panel, and a piano-roll/events section.

1. First Panel

2. **Second Panel**
3. **Piano-Roll/Events Panel**
4. **Bottom Panel**
5. **Common Actions**

Before we describe this window, there are some things to recognize. First, if the pattern is empty when play is started, the progress bar will still move. This is necessary to help the user key in a new pattern. Second, to add a note, one must press the right mouse button (the pointer changes to a pencil) and, while holding it, press the left mouse button. Or, to use a keystroke, click in the pattern editor, press **p** to select the "pencil" or "paint" mode, then left-click to add a note or left-click-drag to add multiple notes as the mouse moves.. Press or release the right mouse button, or press **x** to "eXit" or "eXscape" from that mode. Also remember that notes are drawn only with the length selected by the "notes" button near the top of the pattern window. There are some other tricks to modifying the new notes that are described later.

Also new with *Sequencer64*, and not in *Seq24*, is the automatic horizontal scrolling of the sequence/pattern editor window when playback moves the progress bar outside of the current frame of data. This feature makes it easier to follow patterns that are longer than a measure or two.

Note that *Sequencer64* also provides a way to restart the progress bar within the pattern without resetting it to the beginning of the pattern. This new feature is called "pause". It can be accessed by the new pause key (which defaults to the period character) or by the pause button, which appears when playback is underway. (This feature can be disabled if the application is built via source code. Note that it works only in ALSA mode at present.)

4.1 Pattern Editor / First Panel

The top bar (horizontal panel) of the Pattern (sequence) Editor lets one change the name of the pattern, the time signature of the piece, how long the loop is, and some other configuration items.

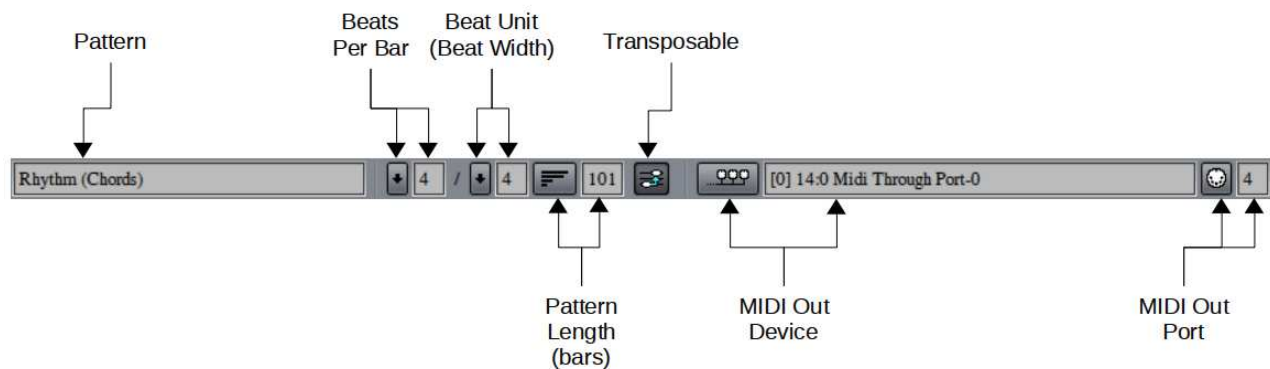


Figure 54: Pattern Editor, First Panel Items

In recent versions of *Sequencer64*, a "sequence-is-transposable" feature has been added, as shown above.

1. **Pattern Number** (not shown)
2. **Pattern Name**
3. **Beats Per Bar**
4. **Beat Unit (Beat Width)**

- 5. **Pattern Length**
- 6. **Transposable (toggle)**
- 7. **MIDI Out Device**
- 8. **MIDI Out Port**

1. Pattern Number. This item is a read-only item that shows the sequence/track/pattern/loop number, to make it easier to pick it out when a lot of patterns are being edited at once.

2. Pattern Name. Provides the name of the pattern. This name should be short and memorable. It is displayed in the Patterns window, on the top line of its pattern box/slot. Unfortunately, there is no edit cursor in this field (not sure why yet), so one has to edit blind.

3. Beats Per Bar. Part of the time signature, and specifies the number of beat units per bar. The possible values range from 1 to 16, if the drop-down menu is used. As of version 0.90.6, the numeric value can be directly edited, to achieve non-standard values, thanks to an update from Jean-Emmanuel.

4. Beat Unit (Beat Width). Part of the time signature, and specifies the size of the beat unit: 1 for whole notes; 2 for half notes; 4 for quarter notes; 8 for eighth notes; 16 for sixteenth notes; and 32 for thirty-second notes. The whole time signature is display at the bottom center of a pattern slot.

5. Pattern Length. Sets the length of the current pattern, in measures. The possible values range from 1 to 16, then 32, and 64. However, when opening or importing a non-*Sequencer64* MIDI tune, the length of each track will be used, and so other values are possible; they just cannot be set via the user-interface. However, as of version 0.90.6, the numeric value can be directly edited, to achieve non-standard values, thanks to an update from Jean-Emmanuel.

Note that bringing up a short sequence (one less than one measure or bar in length) in the pattern editor will adjust the sequence to pad it to the length of one measure. For example, a sequence containing just one program change will be padded to the size of a full measure. This adjustment makes it show progress more smoothly in the main window when the sequence is playing. *Sequencer64* will, when it reads such a short sequence from a MIDI file (whether foreign or native to *Sequencer64*), pre-pad it to the length of a measure, so that it will always show smooth progress.

It would be nice to have a value that represents "indefinite", so that the loop or pattern would be more like a track, and not be repeatable. We have part of that functionality: as of version 0.90.5, we have incorporated changes from user Stazed that allow the pattern to expand indefinitely while the user inputs MIDI from a controller. See section 4.4 "Pattern Editor / Bottom Panel" on page 80 below. Also nice would be a "one-shot" pattern, useful for live intro patterns, for example.)

6. Transpose Toggle. This item, if enabled in the build, allows the sequence to be transposed by the global transpose selection made in the song editor. If transpose is enabled for that pattern, the button will be highlighted as per the current desktop theme. Patterns for drums should, in general, not be transposable.

7. MIDI Out Device (Buss). This setting specifies one of the 16 MIDI output busses provided by *Sequencer64*, or one of the MIDI devices set up in the computer. The settings look a lot like figure 43 "Existing Pattern, Right-Click Menu, MIDI Output Busses" on page 54.

8. MIDI Out Port (Channel). This settings select the MIDI output channel, or port. The possible values range from 1 to 16. If instruments are defined in the "user" configuration file to that device and channel, their names will be shown.

4.2 Pattern Editor / Second Panel

The second horizontal panel of the Pattern Editor provides a number of additional settings.

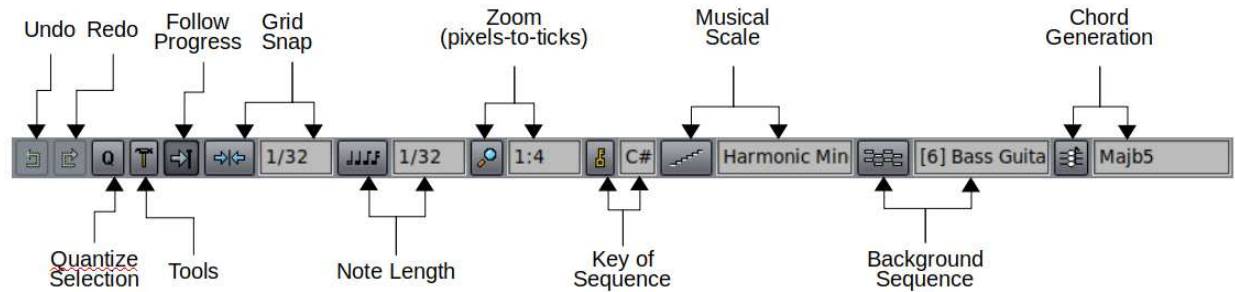


Figure 55: Pattern Editor, Second Panel Items

We show a new screen-shot, because there is a new button to the right of the **Tools** ("hammer" button). This button toggles the "follow progress" feature; it is the active button in the diagram above.

If *Sequencer64* is built with the new chord-generation option built in (the default), then the second panel is wider to make room for an addition user-interface item, shown at the right of the figure above.

1. **Undo**
2. **Redo**
3. **Quantize Selection**
4. **Tools**
5. **Follow Progress** (new)
6. **Grid Snap**
7. **Note Length**
8. **Zoom**
9. **Key of Sequence**
10. **Musical Scale**
11. **Background Sequence**
12. **Chord Generation**

1. Undo. The Undo button will roll back any changes to the pattern from this session. It will roll back one change each time it is pressed. It is not certain what the undo limit (if any) is, however. Pressing **Ctrl-Z** is the same as using the **Undo** button.

2. Redo. The Redo button will restore any undone changes to the pattern from this session. It will restore one change each time it is pressed. It is not certain what the redo limit is, however. There is no "Redo" key in the pattern editor.

3. Quantize Selection. Pressing this button will quantize the selected events, as per the **Grid Snap** setting.

4. Tools. This button brings up a nested menu of tools for modifying selected events and notes.

5. Follow Progress. Pressing this button toggles whether or not the progress bar follows progress in long patterns. Turning off this feature is useful when one wants to concentrate on the current measure without the paging to subsequent measures that occurs with the "follow progress" feature.




Figure 56: Tools, Context Menu

1. **Select**
2. **Modify Time**
3. **Modify Pitch**

- **Select** provides two sets of selections for notes:
- **All Notes**, which selects all notes in the pattern; Note that **Ctrl-A** will also select all of the events in the pattern editor.
- **Inverse Notes**, which inverts the selection of notes.

Other event-selection actions are provided using the mouse in the piano roll:

- **Left Click**. Pressing the left button on a note or a event deselects all other notes or events, and selects the item clicked on.
- **Ctrl Left Click**. Pressing the **Ctrl** key and the left button on a note or an unselected event *adds* that event to the selection.
- **Left Click Drag**. Pressing the left mouse button and dragging also lets one select ("lasso") multiple events and notes.
- **Ctrl Left Click Drag**.
 - Pressing the **Ctrl** while left-click-dragging *on unselected events* lets one make additional selections of multiple events and notes.
 - Pressing the **Ctrl** while left-click-dragging *on an already-selected event* lets one stretch or compress the lengths of multiple notes in the selection.

There are many things that can be done with selected notes, as will be seen in the following paragraphs.

• **Modify Event Data** offers a way to change the event data (the lower pane of the pattern editor, the "data pane"). By left-dragging the mouse in the data pane across the value lines that are shown, the values are chopped or set to the height of the mouse pointer at each event. When notes are selected, and the mouse is used to change the values (heights) of the lines in the event-data area, *only the events that are selected* are changed. The data-values of *unselected* events are left unchanged. A cool feature from *Seq24*.

• **Modify Time** offers two ways to tweak the timing of the selected note: **Quantize Selected Notes**, which quantizes the selected notes, the same way as the **Quantize ("Q")** button; **Tighten Selected Notes**, which is merely a less strict form of quantization.

• **Modify Pitch** has only one entry by default, **Transpose Selected** (not shown). Selecting the **Transpose Selected** entry brings up the following sub-menu:

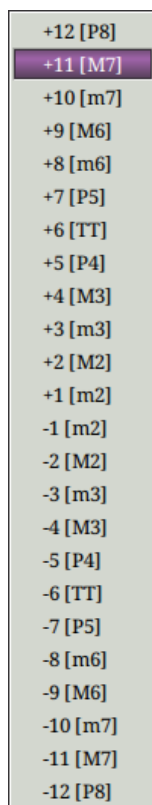


Figure 57: Tools, Transpose Selected Values

- If the user has selected a **Musical Scale** setting other than **Off**, then **Modify Pitch** has two entries: **Transpose Selected**, discussed above, plus another sub-menu, **Harmonic Transpose Selected**, which makes sure that all transpositions stay on the selected scale.

Note that one can also modify the pitch of selected notes by the left-click-drag action, or by moving the selection using the up-arrow or down-arrow keys.



Figure 58: Tools, Two "Transpose" Menus

Remember that only the **Transpose Selected** entry is shown if the **Musical Scale** setting is **Off**. Selecting the **Harmonic Transpose Selected** entry brings up the following sub-menu:

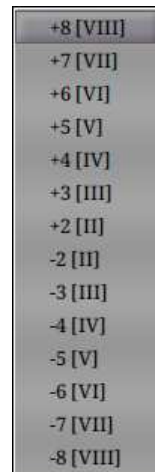


Figure 59: Tools, Harmonic Transpose Selected Values

Again, the harmonic-transpose option will not be available unless a scale has been selected.

6. Grid Snap. Grid snap selects where the notes will be drawn. The following values are supported: 1, 1/2, 1/4, 1/8, 1/16, 1/32, 1/64, and 1/128. Additional values are also supported: 1/3, 1/6, 1/12/, 1/24, 1/48, 1/96, and 1/192.

7. Note Length. Note Length determines the duration of the inserted notes. Like the **Grid Snap** values, the following values are supported: 1, 1/2, 1/4, 1/8, 1/16, 1/32, 1/64, and 1/128. Additional values are also supported: 1/3, 1/6, 1/12/, 1/24, 1/48, 1/96, and 1/192.

8. Zoom. Zoom is the relation between MIDI pixels and ticks, written as "pixels:ticks", where "ticks" is really the "pulses" in "PPQN". For example, 1:4 = 4 ticks per pixel. Supported values are 1:1, 1:2, 1:4, 1:8, 1:16, and 1:32, along with more new values to support higher PPQN tunes: 1:64, 1:128, 1:256, and 1:512. The default zoom is 2 for the standard PPQN value, 192, but it increases for higher PPQN values. This is the zoom of the Pattern Editor. As the right number goes higher, the effect is to zoom out, and show more of the pattern at once. In fact, it is probably better to list them as ticks (pulses) per pixel:

- 1 pulse per pixel
- 2 pulses per pixel (default value)
- 4 pulses per pixel
- 8 pulses per pixel
- 16 pulses per pixel
- 32 pulses per pixel (same as Song Editor)
- . . .
- 512 pulses per pixel

New: After one has left-clicked in the piano roll, the "z", "Z", and "0" can be used to zoom the piano-roll view. The "z" key zooms out, the "Z" key zooms in, and the "0" key resets the zoom to the default value. The zoom feature also modifies the time-line (measures indicator) and the data area. If, for some reason, the data area and piano-roll get out of sync, click on the horizontal scroll bar to force the views to redraw properly.

Note that the Song Editor, which now has zoom functionality (through the "z", "Z", and "0" keystrokes only), has a default resolution of 32 pulses per pixel, so, by default, it has 16 times the resolution of the Pattern Editor.

9. Key of Sequence. Selects the desired key for the pattern. The following scales are supported: C, C#, D, D#, E, F, F#, G, G#, A, A#, and B. Note that changing the **Key** will also shift the marked notes for the **Musical Scale** setting.

New: As of version 0.9.9.8, the key that a sequence is set to is now saved in the MIDI file along with the rest of the data for the sequence. **However**, it turns out that a change made to the key, scale, or background sequence in the sequence editor is saved in that editor, so that opening another sequence will apply the same settings to that sequence. This is an optional feature, now more rigorously supported, as noted below.

If the global-sequence-feature is enabled, and the user selects a different key, scale, or background sequence in the sequence editor, then *all* sequences will share the selected key, scale, or background sequence. Furthermore, these settings are saved in the "proprietary" section of the MIDI file, where they are available for all sequences.

If the global-sequence-feature is *not* enabled, and the user selects a different key, scale, or background sequence in the sequence editor, then only that sequence will use the selected key, scale, or background. The key, scale, or background sequence change will be saved in the MIDI file only for that sequence, as a SeqSpec meta event. The global-sequence-feature setting can be made in the "user" configuration file.

10. Musical Scale. Selects the desired scale for the pattern. When a scale is selected, the following features are supported:

- The notes that are *not* in the scale are shown as grey in the piano roll, to make it easier to key all notes in-scale.
- When harmonic transposition is performed, the notes are shifted so that they remain in the selected scale.
- The exact notes that are considered "in-scale" depend also on the exact value of the **Key of Sequence** setting.

New: Originally, only the following scales were supported: Off, Major, and Minor. Now, the following scales are supported:

- **Off (Chromatic)**
- **Major (Ionian)**
- **Minor (Aeolian)**
- **Harmonic Minor**
- **Melodic Minor**
- **Whole Tone**
- **Blues**
- **Major Pentatonic**
- **Minor Pentatonic**

Please let us know of any mistakes found in the new scales. Also please note that the **Melodic Minor** scale is supposed to descend in the same way as the natural **Minor** scale, but there is no way to support that trick in *Sequencer64*.

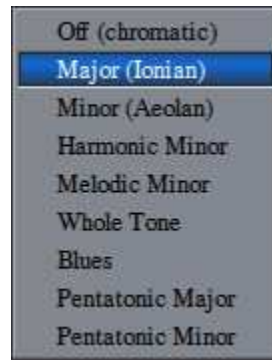


Figure 60: Scales Currently Supported in Sequencer64

One can select which **Musical Scale** and **Key** the piece is in, and *Sequencer64* will grey those keys on the piano-roll that are *not* in the selected scale for the selected key. This is purely a visual thing; a user can still add off-key notes. This effect is shown for the C Major scale in the following figure:

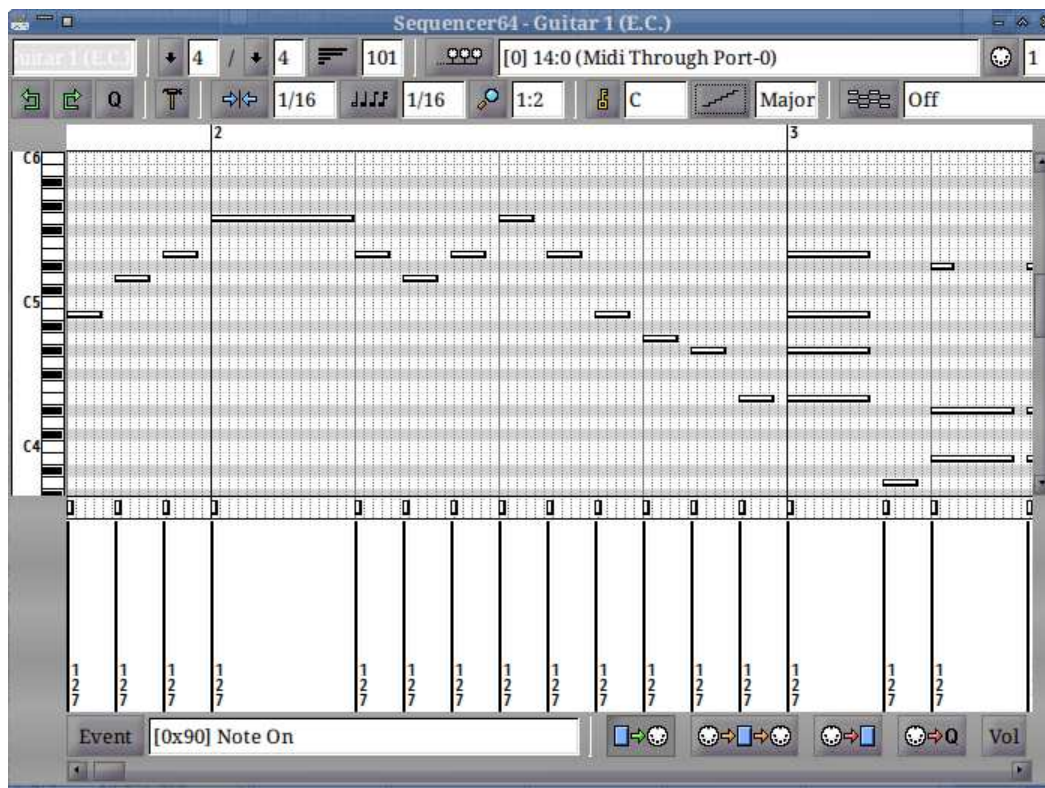


Figure 61: C Major Scale Masking

This feature makes it a bit easier to stay in key while playing and recording. Note that the scale will shift when a different **Key** is selected.

New: The scale that a sequence is set to is now saved in the MIDI file along with the rest of the data for the sequence. **However**, it turns out that a change made to the key, scale, or background sequence in the sequence editor is saved in the editor, so that opening another sequence will apply the same settings to that sequence. This is a feature. The feature had some quirks, which are fixed, and it is now an optional

feature. Also, the user has the option of applying the key/scale/background-sequence either globally (all sequences) or locally, per-sequence, with each sequence holding its key, scale, and background-sequence settings in SeqSpec meta events.

11. Background Sequence. One can select another pattern to draw on the background to help with writing corresponding parts. The button brings up a small menu with values of **Off** and **[0]**. The 0 is a set number. Sets are numbered from 0 to 31. Additional set numbers appear in the menu for each set that has data in it. Under the **0** entry, a menu like the following appears:



Figure 62: Sample Background Sequence Values

Once the desired pattern is selected from that list, it appears as dark cyan note bars, along with the normal notes that are part of the pattern. (Also note the orange selected notes and events in the following figure.)

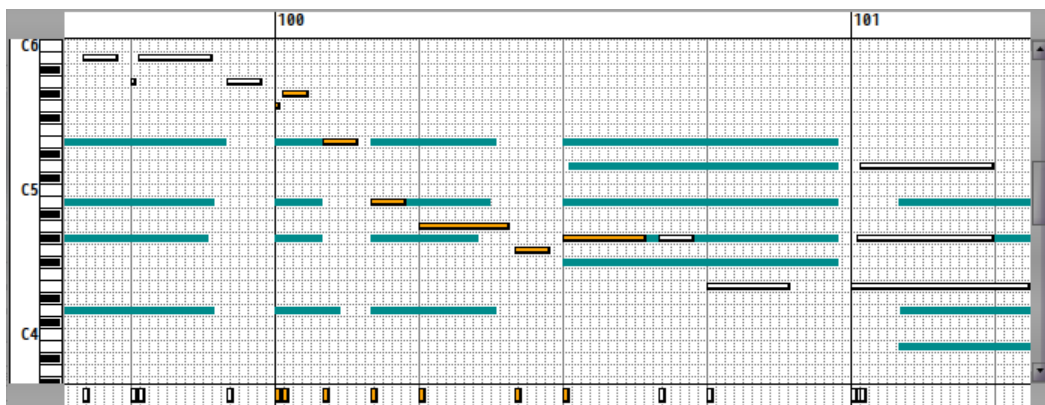


Figure 63: Background Sequence Notes

The dark cyan notes shown represent the rhythm pattern that was selected as the background pattern.

New: The background sequence that a sequence shows is saved in the MIDI file along with the rest of the data for the sequence. **However**, it turns out that a change made to the key, scale, or background sequence in the sequence editor is saved in the editor, so that opening another sequence will apply the same settings to that sequence. This is an optional feature, now more rigorously supported, as noted earlier.

12. Chord Generation. The ability to insert chords with one click has been added. This feature comes from user "stazed" and his *Seq32* project ([26]).

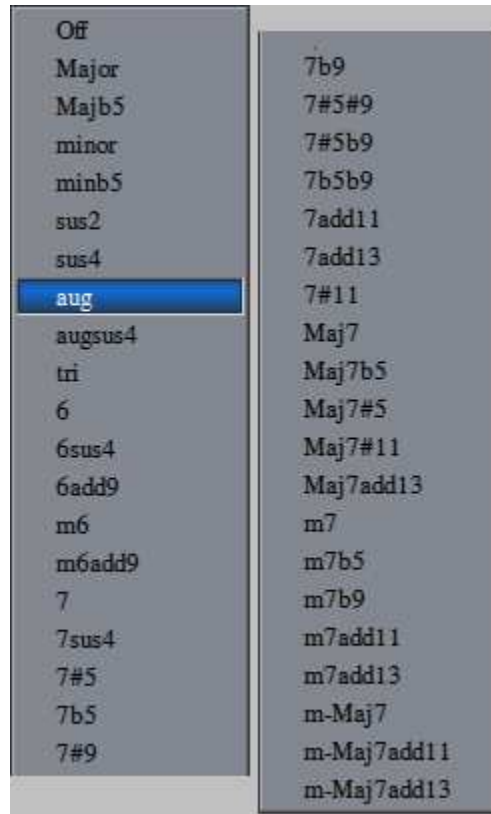


Figure 64: Chord Generation Menu

The figure shows the menu broken into two pieces. Once a value other than **Off** is selected, a left-click in drawing mode will add multiple notes representing the chord created, with the clicked note value as the base of the chord.

4.3 Pattern Editor / Piano Roll

The piano roll is the center of the pattern (loop, track, sequence) editor. It is accompanied by a thin "event bar" (or "event area", or "event strip") just below it, and a taller "data bar" or "data area" just below that. While the pattern editor is very similar to note editors in other sequencers, it is a bit different in feel. A good mouse with 3 or more buttons is practically a necessity for editing (though we have made *Sequencer64* more usable with some crummy trackpads now common on modern laptops, and also usable with keystrokes.) We tend to like the Logitech Marble Mouse, an ambidextrous USB trackball. It has four buttons, and we use the `contrib/scripts/marblemouse` script to set up the left small button as a middle button. The script merely makes the following call:

```
xmodmap -e "pointer = 1 8 3 4 9 6 7 2 5 10 11"
```

Editing is much easier after making that setting. Of course, keystrokes and additional mouse config-

uration have been added to make editing easier even without a good mouse. For example, one can page up and down vertically in the piano roll using the Page Up and Page Down keys. One can go to the top using the Home key, and to the bottom using the End key. One can page left and right horizontally in the piano roll using the Shift Page Up and Shift Page Down keys. One can go to the leftmost position using the Home key, and to the rightmost position using the End key, And there are more keystroke actions to be described later.

Also, do not forget the note-step option. If one paints notes with the mouse, the note is previewed, and the note position advances with each click. If one paints notes via an external MIDI keyboard, the notes are painted and advanced, but they are not previewed. To preview them, click the **pass MIDI in to output** button to activate so that they will be passed to one's sound generator or software synthesizer.

4.3.1 Pattern Editor / Piano Roll Items

The center of the pattern editor consists of a time panel at the top, a virtual keyboard at the left, a note grid, a vertical scrollbar, an event panel, and a data panel at the bottom.

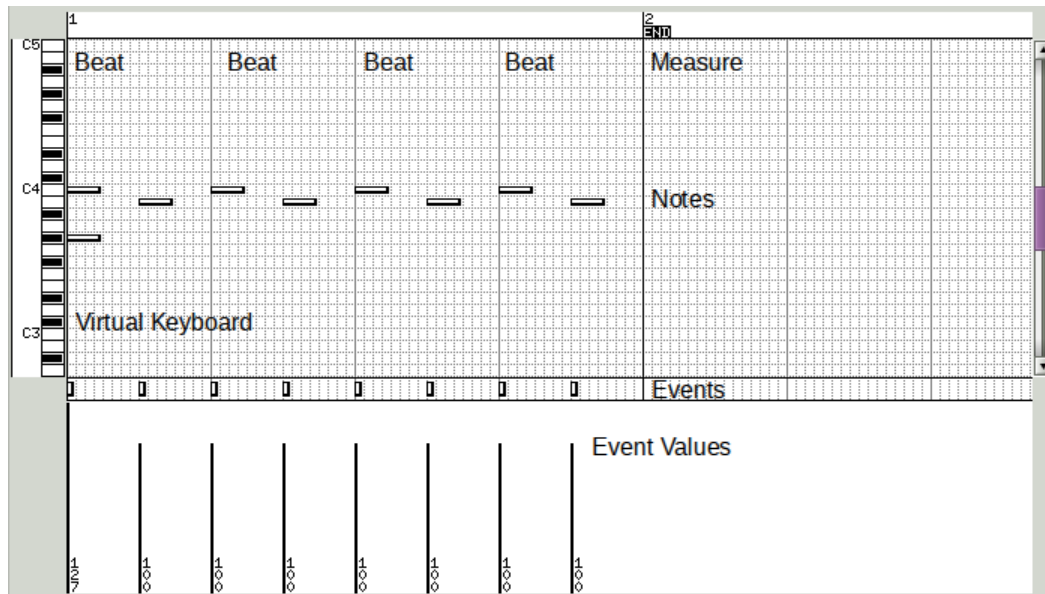


Figure 65: Pattern Editor, Piano Roll Items

1. **Beat**
2. **Measure**
3. **Virtual Keyboard**
4. **Notes**
5. **Events**
6. **Event Values**

1. Beat. The light vertical lines represent the beats defined by the configuration for the pattern. The even lighter lines between the beats are useful for snapping notes.

2. Measure. The heavy vertical lines represent the measures defined by the configuration for the pattern. Also note that the end of the pattern occurs at the end of a measure, and is marked by a blocky **END** marker.

3. Virtual Keyboard. The virtual keyboard is a fairly powerful interface. It shows, by shadowing, which note on the keyboard will be drawn. It can be played with a mouse, using left-clicks, to preview a short motif. It can show marks to indicate off-scale notes, to make them easy to avoid. Every octave, a note letter and octave number are shown, as in "C4". If there is a difference scale in force, then the letter changes to match, as in "F#5".

A right-click anywhere in the virtual keyboard area toggles the display between the octave note letters and the MIDI note numbers (only every other one is displayed due to space, to avoid cramped numbering). The following figure shows both views, superimposed for comparison.

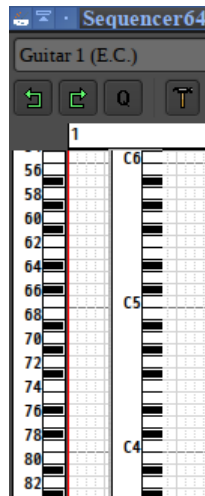


Figure 66: Pattern Editor, Virtual Keyboard Number and Note Views

4. Notes. Musical notes are indicated by thick horizontal bars with white centers. Each bar provides a visual representation of the pitch of a note and the length of a note.

5. Events. Also known as the "events pane" or "events panel". The small (just a few pixels high) events strip shows discrete events, such as Note On and Note Off and their velocities, or various Controller items and their values. We recommend not editing or selecting events in that pane (feel free to disobey), but it is a good way to add events. Either left-click (to add one event), or left-click-drag horizontally (to add a series of events at the current note resolution.) One can also left-click in that section, then hit the p key to go into "paint" mode, and hit the x key to escape that mode.

6. Event Values. Also known as the "data pane" or "data panel".

The events values for the currently selected category of events are shown in this window as vertical lines of a height proportional to the value. These values can be easily modified by left-click-dragging the mouse past each line, to chop it off at the given value. Easier to try it than explain it. Right-click-drag also works the same.

4.3.2 Pattern Editor / Event Editing

When we say "editing" in the context of the piano roll, in part we mean that we will "draw" or "paint" notes. Drawing, modifying, copying, and deleting notes is actually very elegant in *Sequencer64* and in *Seq24*.

Note editing is a bit different with *Sequencer64*, since it requires two mouse buttons in many cases. There are some new laptop touchpads that really have only one mouse button, and use positioning to

determine if the click is a left-click or a right-click. Two-fingered actions are devoted to scrolling, so that there is no way to generate a Linux middle-click. One solution is to use a four-button USB trackball configured with an easy middle-button setup. It's easier than a touchpad, anyway. So we've coded up a couple of solutions to this middle-click problem.

Note that, if only a middle-button is needed, **Ctrl-left** will simulate that button.

New: There is a feature to allow the Mod4 (the Super or Windows) key to keep the right-click in force even after it is released. See 2.2.7.5. Basically, pressing Mod4 before releasing the right-click that allows note-adding, keeps note-adding in force after the right-click is released. Now notes can be added at will with the left mouse button. Right-click again to leave the note-adding mode.

New: Another way to turn on the paint mode has been added. To turn on the paint mode, first make sure that the piano roll has the keyboard focus by left-clicking in it, then press the **p** key while in the sequence editor. This is just like pressing the right mouse button, but the draw/paint mode sticks (as if the Mod4 mode were in force). To get out of the paint mode, press the **x** key while in the sequence editor, to "x-scape" (get it? get it?) from the paint mode. These keys also work while the sequence is playing.

The **p** and **x** keys also works in the small event strip just above the white data area. The Mod4-right-click feature does not yet work in that aread of the user interface, but the **p** key does.

4.3.2.1 Editing Note Events

The Piano Roll pane provides for a quite sophisticated set of note-editing actions. Not only is there a native mouse-interaction mode, but there is a "fruity" mouse-interaction mode that works more like the application *Fruity Loops*, its follow-on *FL Studio*, and its Linux look-alike, *LMMS*.

This option is currently *not available* in the **Qt 5** version of *Sequencer64*. We really want to refactor the code to be able to completely reconfigure the mouse interface according to any user's preferences, but that is currently a low priority.

1. Fruity Mode. At some point, we will add a section detailing the usage of the "fruity" mode of mouse-interaction. For now, section 2.2.7.5 "Menu / File / Options / Mouse" on page 33, such as it is, will have to do.

Please study the following paragraphs carefully, ideally while trying them out in *Sequencer64*.

2. Enter Draw Mode. In the note (grid/roll) panel, **holding** down the **right** mouse button will change the cursor to a pencil and put the editor into "draw" mode, also known as "note-adding" or "paint" mode. To exit the draw mode, release the right mouse button, and the cursor will turn back into an arrow.

Another way to enter paint mode is to make sure the piano roll has focus (left click in it), and then press the **p** key. To exit the draw mode, press the **Shift-p** key.

3. Add Notes. Then, while still **holding** the **right** mouse button, click the **left** mouse button to **insert** new notes. Many people find this combination strange at first, but once one gets used to it, it becomes a very fast method of note manipulation. An new option is to hold the Mod4 key while releasing the right button, which keeps the mouse in draw mode. Another new option is to press the **p** to enter draw mode, and stay in it until **Shift-p** is pressed. Note that this click will add a single note, and the length of the note will be that specified in the note-length setting (e.g. "1/16").

To increase the number of notes, keep dragging the mouse (with both buttons held). It can be dragged rightward, leftward, upward, and downward. Dragging left or right adds new notes, while dragging upward

or downward moves the current note to a different pitch. We call this the "auto-note" feature. Please note that the auto-note feature does *not* work with the chord-generation feature.

The draw mode has the following features:

- Notes are continually added as the mouse is dragged ("auto-notes").
- Notes cannot be added past the "END" marker of the pattern, which marks the **Sequence Length in bars** setting.
- As the mouse is dragged while the left button is held in draw mode, notes are either added, or, if already present at that note-on time, are moved up and down.
- If the draw mode is exited, and entered again, then the original notes will not be altered. Instead, new ones will be added.
- Notes can be added while the pattern is playing, and will be heard the next time the progress bar passes over them.

Thus, one can, with some care, draw a nice chorded sequence. Adjustments to it can be made afterward.

4. Select Notes. Adjustments can be made to one or more notes by selecting one or more notes, and then applying one or more special "selection actions" to the selection.

To select a single note, simply **left click** on it. The selected note will turn orange.

To select multiple notes, perform a **left click drag** to form a selection box that intersects (even partly) the desired notes. Once the mouse is released, all of the desired notes should be orange.

To add more notes to a selection of notes, move to an unselected note and perform a **ctrl left click drag** to form a selection box that intersects (even partly) the desired notes. Once the mouse is released, all of the desired notes should be orange. Be careful! If you ctrl-left-click-drag on an already-selected note, the drag will change the length of all of the notes in the selection.

Pressing the **Ctrl-A** key will select all of the events in the pattern editor.

The **Tools** button described in section 4.2 "Pattern Editor / Second Panel" on page 65 can also be used to modify selections.

Once one or more notes are selected, they can be modified in time, pitch, or length.

5. Deselect Notes. To deselect the notes, click somewhere else in the piano roll, and the notes should change back to white.

There is no way to deselect a single note, with, say a shift-click or ctrl-click action.

6. Move Notes in Pitch. To move notes in pitch, once selected, grab one of the notes in the selection and drag it upward or downward. **New:** Also, since a selection is in force, the Up and Down arrow keys can also be used to change the pitch of every note in the selection. The smallest unit of pitch change is one MIDI note value.

Warning: If one moves the selection too low or too high in pitch, whether with the mouse or the arrow keys, any notes that go below the lowest MIDI pitch or above the highest MIDI pitch **will be lost!** If done using the mouse, the undo feature (Ctrl-z) will work. If done using the arrow keys, the undo feature does not work! Be careful, especially if you have a fast keyboard repeat rate!

7. Move Notes in Time. To move notes in time, once selected, grab one of the notes in the selection and drag it leftward or rightward. **New:** Also, since a selection is in force, the Left and Right arrow

keys can also be used to change the time of every note in the selection. The smallest unit of time change is the **Grid snap** value, which might be a 16th note, for example.

Note that there is no possibility of note loss with a change in time. When a note disappears at one end of the pattern boundary, it wraps around to the other end. Cool.

(There is another feature of the arrow keys when no selection is made, that supposedly moves an "origin" for playback, but we haven't been able to figure out exactly if it does anything.)

8. Change Note Length. Pressing the **middle** mouse button **or** pressing the **ctrl left** mouse button in tandem, while the pointer is hovered over a selected note, will let one change the length of a selected note. If more than one note is selected, then the length of all selected notes is changed.

Once a selection of notes is made, one can use the shift-middle-click-drag (true?) or ctrl-left-click-drag sequence over the selected notes to draw a box beyond the extent of the notes. When the mouse is released, each of the events is moved and lengthed to be proportionally longer to fit exactly within the box one drew. This feature is called *event stretch*.

If the box that was drawn was shorter than the original extent of the notes, then the notes move and shrink proportionally to occupy the smaller box. This feature is called *event compression*.

Warning: If one reduces or increases the length of a note selection by too much, the note or notes will "wrap-around" to the end of the sequence boundary and grow more from the beginning of the sequence. It is not clear if this new note has an ending time that is less than its beginning time. If it happens, one probably ought to undo it.

Note that notes can be shortened below the default note length by event compression. Note that there is currently no way to change the length of the note using a keystroke.

9. Copy/Paste. Copying, cutting, and pasting is supported by selecting a number of events or notes, and using the Cut (**Ctrl-X**), Copy (**Ctrl-C**), Paste (**Ctrl-V**), and "drop" (**Enter**) keys. When the notes are selected, one can delete them with the **Delete** or **Backspace** key. If the events are *cut*, using the **Ctrl-X** key, then they can be pasted, using the **Ctrl-V** key. However, once **Ctrl-V** is struck, then one must *move* the mouse pointer to see where to paste the events, or move it with the arrow keys. An orange box representing the selected-and-copied notes appears, and the user should move the box (note) to the desired location and then left-click.

(Warning: We've had temporary issues where the selection box flickers, and this seems to be due to updates in the graphics library used by Sequencer64. This issue might depend on the Linux distro one uses.)

Additionally, one can move the orange box using the arrow keys, to the desired location, and then hit the **Enter** key to drop the notes at that location.

Finally, note that selected notes that are cut or copied can then be pasted into *other* pattern editor dialogs; that is, they can be pasted into other sequences.

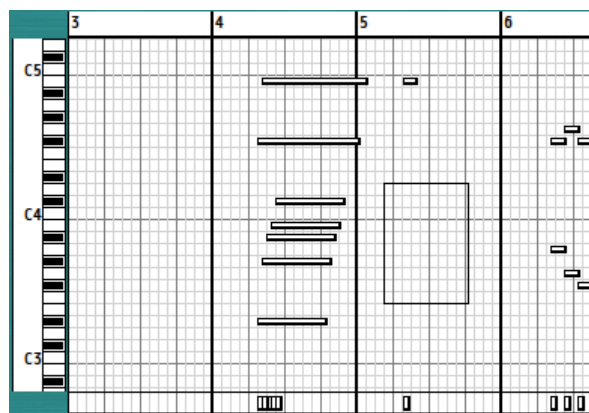


Figure 67: Piano Roll, Paste-Box for Cut Notes

Note that the selection box is now orange, not black. Move this box to where pasting is desired, and left-click. The moved notes appear, still selected, and they can then be moved further, if desired, by using the arrow keys, or cut and move them again.

For the appearance of selected events (orange), see figure 68 "Piano Roll, Selected Notes and Events" on page 79.

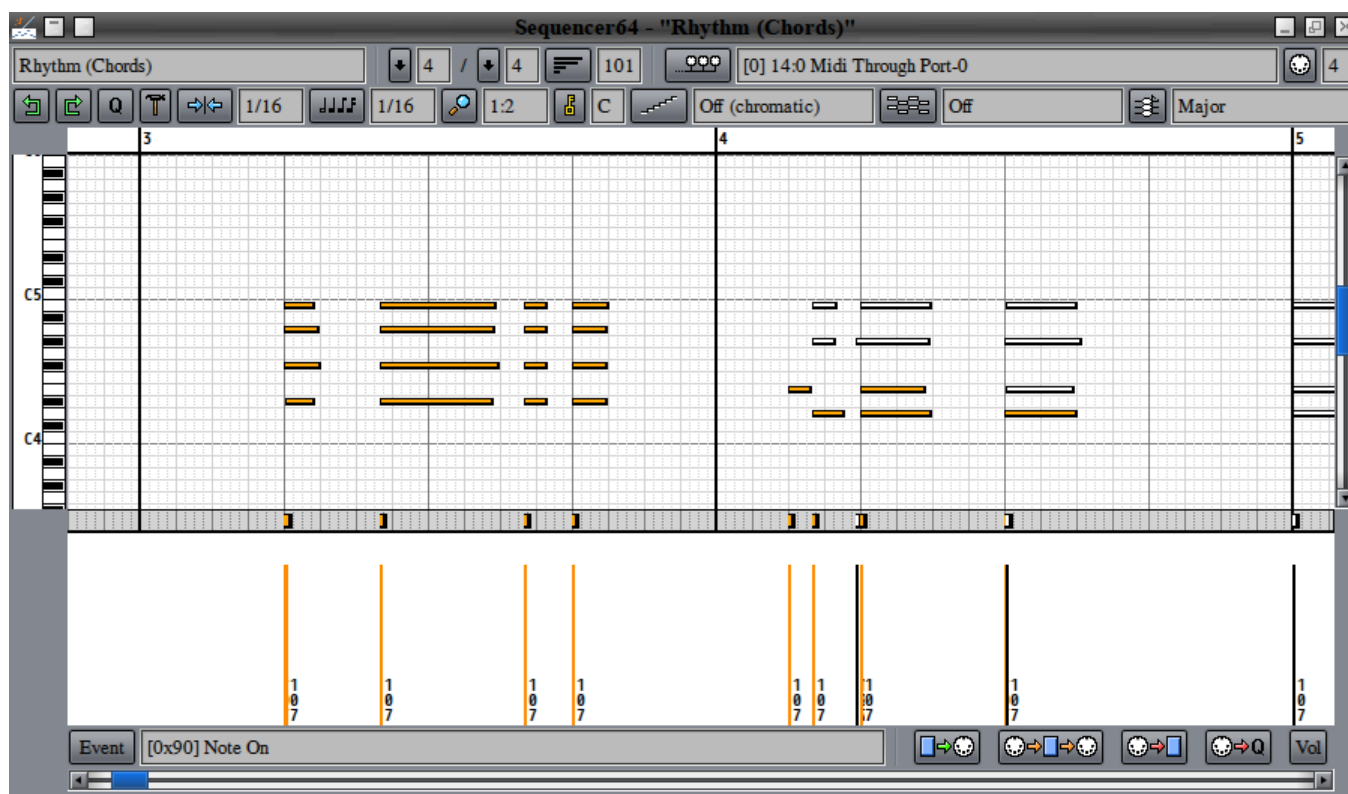


Figure 68: Piano Roll, Selected Notes and Events

New: The selection, shown in figure 68 "Piano Roll, Selected Notes and Events" on page 79, illustrates the new style of event selection, which colors the data bars as well as the event and note bars.

This selection was made by first selecting one set of events by the left-click-drag action, then selecting more events by holding the Ctrl key for the next left-click drag action. The second selection left out some events, which are thus still shown as black bars in the data area.

As an aside, note that the event strip is gray. *Sequencer64* now shows this strip as gray when the selected event (the **Event** button) is Note On, Note Off, or Aftertouch. This color is purely a reminder that moving these events can really screw up the notes, for example by moving Note Off to before the Note On event.

4.3.2.2 Event and Data Panels / Editing Other Events

Note On and *Note Off* events (and other events) can appear as small squares in the event strip, along with a black vertical bar with a height proportional to the velocity of the note event, plus a numeric representation of that value. Note events do not need to be inserted in the event strip. (*Note events can be inserted there, but they end up as short events of the lowest possible note, 0 or C1, and they don't have a Note Off event. So don't do that!*)

Other event types can be inserted via the event strip. To do that, first select the kind of event to insert using the **Event** button in the bottom panel. Then place the mouse cursor in the event strip. Right-click to make the drawing pencil appear at the exact spot where the event must go. While holding the right button, click the left button. A small square for the event should appear.

Should one want more of the same event, continue to hold both buttons and drag the mouse. One event should appear at each beat position (e.g. at each 16th note position) that is crossed.

To move the event(s) to a different spot, select it or them via the left button. Then drag it or them to where one wants them. It is currently not possible to move them to positions smaller than the beat size. The work-around is to temporarily reduce the beat size, but this requires caution.

Once the event positions are set, the next step is to modify the data values of the events.

The event value (data) editor (directly under the event strip) is used to change note velocities, channel pressure, control codes, patch select, etc. Just left-click+drag the mouse across the window to draw a line. The values will match that line. middle-click+drag and right-click+drag also draw the value line.

Bug: Sometimes the editing of event values in the event data section will not work. The workaround is to do a **Ctrl-A**, and then click in the roll to deselect the selection; that makes the event value editing work again.

Any events that are selected in the piano roll or event strip can have their values modified with the mouse wheel.

4.3.2.3 Editing Note Events the "Fruity Way"

This mode is a lot different, and we have yet to do the exhaustive testing needed to understand how this mode works. Input from actual users of this mode would be welcome. For now, see section [2.2.7.5 "Menu / File / Options / Mouse"](#) on page 33.

4.4 Pattern Editor / Bottom Panel

The bottom horizontal panel of the Pattern Editor provides for selecting events for viewing and edition, and the MIDI playback, pass-through, and recording options of *Sequencer64*.

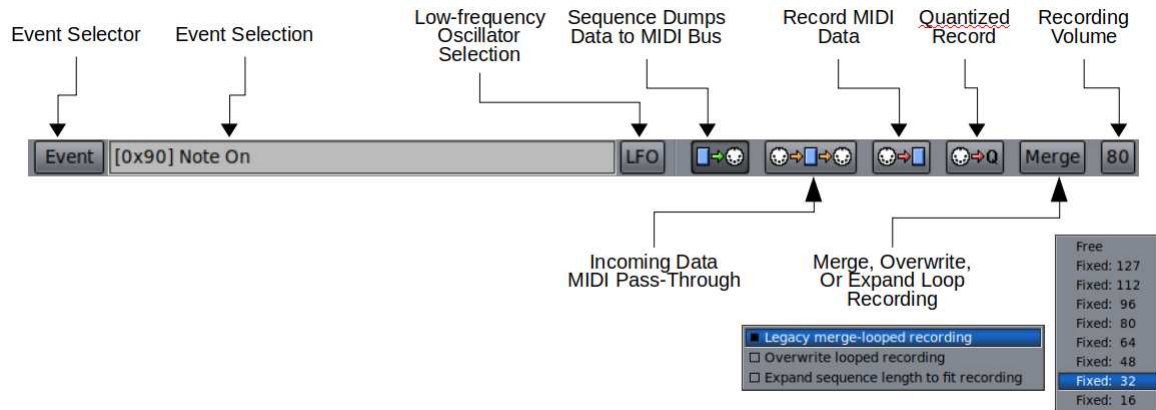


Figure 69: Pattern Editor, Bottom Panel Items

Missing from this diagram is the new "Existing Event Selector" which zeroes in only on events already present in the pattern.

1. **Event Selector**
2. **Existing Event Selector**
3. **Event Selection**
4. **LFO**
5. **Data To MIDI Buss**
6. **MIDI Data Pass-Through**
7. **Record MIDI Data**
8. **Quantized Record**
9. **Recording Type** (Merge, Replace, Expand)
10. **Select Recording Volume**

1. Event Selector. This button brings up the following context menu, so that the user can select the category of events to view and edit.

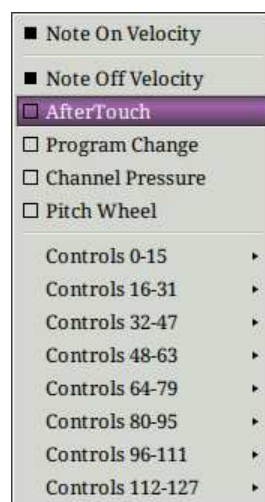


Figure 70: Pattern Editor, Event Button Context Menu

Note the squares. Some of filled (black), others are empty. The filled squares indicate that the

sequence does indeed have some events of that type. Otherwise, there are no such events in the sequence. Useful in deciding if it is worth selecting the event.

The sub-menus of this context menu show 128 controller messages, so we won't try to show all of them here. They also use the squares to indicate if there are any events of the type shown in the menu.

These sub-menus can be modified by editing the file

```
$HOME/.config/sequencer64/sequencer64.usr
```

(legacy mode: `$HOME/.seq24usr`), to make it match one's instrument. See section 10 "Sequencer64 "usr" Configuration File" on page 128.

2. Existing Event Selector. Not yet shown in the figure above is a small button that will contain either an empty square (no editable events) or a black square (at least one editable event). Unlike the event-selector described above, this one shows only the actual events existing in the track, for quicker selection. The event-selector above is more useful for creating new events.

3. Event Selection. Shows the selection event, with its number shown in hexadecimal notation, and the name of the event shown.

New:

4. LFO. If *Sequencer64* is built with the `--enable-lfo` option, then a low-frequency oscillator functionality is built so that data events can be modulated by some rudimentary wave functions. This feature is now enabled by default. By clicking on the **LFO** button or using the **Ctrl-L** key, the following window appears, shown as the set of 5 vertical sliders:

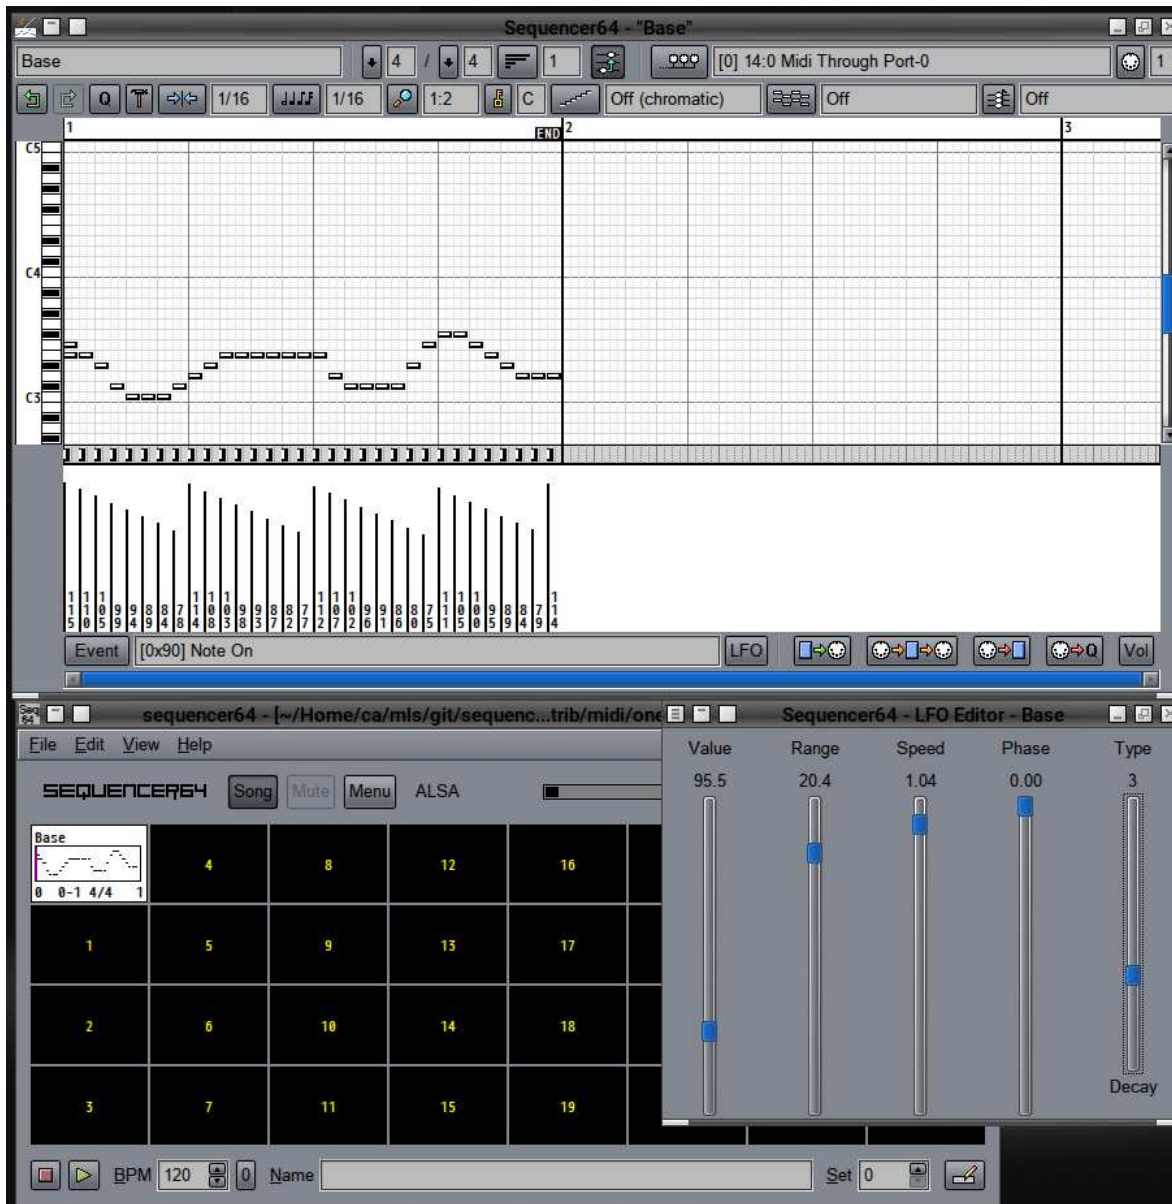


Figure 71: Pattern Editor, LFO Support

Note the controls in this window:

1. **Value:** Provides a kind of DC offset for the data value. Starts at 64, and ranges from 1 to 127.
2. **Range:** Controls the depth of modulation. Starts at 64, and ranges from 1 to 127.
3. **Speed:** Indicates the number of periods per pattern (divided by beat width, normally 4). For long patterns, this parameter needs to be set high, to even show an effect. It is also subject to an 'anti-aliasing' effect in some parts of the range, especially for short patterns. Try it! For short patterns, try a value of 1 at first. For a pattern of one measure in length, this will create four periods of the wave.
4. **Phase:** Provides the phase shift within a period of the LFO wave. A value of 1 is a phase shift of 360 degrees (or maybe it is one radian?).
5. **Wave Type:** Selects the kind of wave to use for the LFO:

1. **Sine wave.**
2. **Ramp (up) sawtooth.**
3. **Decay (down) sawtooth.**
4. **Triangle wave.**

We may have more to explain about this dialog at some point. For now, try it out on the file `one-measure.midi`, and be sure to hover over each control to see the tooltips. Note that it works best with short patterns.

5. Time Scroll. Allows one to pan through the whole pattern, if it is too long to fit in the window horizontally.

6. Data To MIDI Buss. Activating this button will cause the pattern to be output to the MIDI output buss, which will normally be connected to a software or hardware synthesizer, to be heard. Generally, this control should always be activated.

7. MIDI Data Pass-Through. Activating this button will route incoming MIDI data through *Sequencer64*, which will then write it to the MIDI output buss.

8. Record MIDI Data. Activating this button will route incoming MIDI data into *Sequencer64*, which will then save the data to its buffer, and also display the new information (notes) in the piano roll view.

9. Quantized Record. Activating this button will also cause MIDI data to be recorded, but it will be quantized on the fly before recording it. The quantization is to the current snap value.

10. Recording Type. In *Seq24*, the pattern recording worked by merging new notes played as the pattern to be recorded was looped. This method allows a loop to be built up bit-by-bit. *Sequencer64* adds two more methods from Stazed's *Seq32* project. The three methods are:

1. **Merge.** This is the "legacy" style of recording loops, where notes can accumulate.
2. **Replace.** In this method of recording, whenever the loop starts over, and a note is pressed, then the existing notes in that loop are erased, and the new note is added. This provides a good way of correcting major mistakes, live. Note that this method will not work if adding notes while not recording. Also note that this mode can cause incomplete notes if one holds the note and releases it in the next iteration, leaving a partially-drawn note behind. The workaround is to try again.
3. **Expand.** In this method of recording, once the end of the loop is near, whether or not any notes are being input, another measure is added to the length of the loop. This continues indefinitely, whether or not any notes are being played/recorded.

11. Vol. This button allows controlling the volume of the recording. The velocity of the notes will be set to the selected value upon recording. If the **Free** item is selected, then the incoming note velocity is preserved.

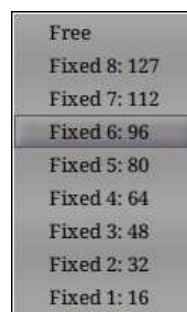


Figure 72: Pattern Recording Volume Menu

The velocity values are shown at the right side of each menu entry. These values correspond to MIDI volume levels from 127 down to 16, as shown in the figure.

One thing fixed in the 0.90.x version is the ability to store MIDI note-on events with the actual velocity provided by the MIDI keyboard used to generate the notes. Previously, even in *seq24*, the **Free** option in the **Vol** menu option did not work. This is fixed.

4.5 Pattern Editor / Common Actions

This section is a catch-all for actions not described above.

4.5.1 Pattern Editor / Common Actions / Scrolling

Let us describe the actions that can be performed with a scroll wheel, or with the scrolling features of multi-touch touchpads. There are three major scrolling actions available when using mouse scrolling, with the mouse hovering in the piano-roll area:

- **Vertical Panning (Notes Panning)** Using the vertical scroll action of a mouse or touchpad moves the view of the sequence/pattern notes up and down. One can also click in the piano roll, and then use the **Page-Up** and **Page-Down** keys to move the view up and down in pitch.
- **Horizontal Panning (Timeline Panning)** Holding the Shift key, and then using the vertical scroll action of a mouse or touchpad moves the view of the sequence/pattern time forward and backward. One can also click in the piano roll, and then use the **Shift Page-Up** and **Shift Page-Down** keys to move the view left and right in time.
- **Horizontal Zoom (Timeline Zoom)** Holding the Ctrl key, and then using the vertical scroll action of a mouse or touchpad zooms the view of the sequence/pattern time to compress it or expand it. One can also click in the piano roll, and then use the **z** , **Z** , and **0** keys to change the timeline zoom.

The actions of this scrolling are surprisingly smooth and fast. If an event is selected in the piano-roll area or the (thin) event area, then the scrolling action increases or decreases the value of the event. In the case of a note, this increases or decreases the velocity of the note. For all events, this increases or decreases the length of the vertical line that represents the value of the event.

4.5.2 Pattern Editor / Common Actions / Close

There is no **Close** button in the pattern editor. One can use window-manager actions, such as clicking on the X button of the window frame, or pressing the exit key defined in the window manager.

Sequencer64 also provides the Ctrl-W key to close the pattern editor window.

However, be aware that this convention does not apply to the other application windows of *Sequencer64*.

5 Song Editor

The *Sequencer64 Song Editor* is used to combine all of the patterns into a complete tune. It works by showing one row per pattern/loop/sequence in numbered columns, and the placement of each pattern at various musical bars in the song. In *Sequencer64* parlance, the Song Editor creates a *performance*.

New: As an option in the [user-interface] section of the "user" configuration file, two song editor windows can be brought onscreen, as a convenience for arranging projects with a large number of sequences/patterns. It also provides the **Song** mode of *Sequencer64*, as opposed to the **Live** mode provided by the Patterns Panel, when *Sequencer64* is running in ALSA mode. (In JACK mode, the live versus song mode is controlled by the JACK start-mode flag.)

When the Song Editor has the focus of the application, it takes over control from the Patterns Panel. The Song Editor then controls playback. Once playback is started in the Song Editor, some actions in the Patterns Panel no longer have effect, effectively disabling live mode. The Song Editor takes over the arming/unarming (unmuting/muting) shown in the Patterns Panel. The highlighting of armed/unarmed patterns changes according to whether the pattern is playing in the Song Editor, or not. If one tries to change the muting using a hot-key (or even a click) in the Patterns Panel, the Song Editor immediately returns the pattern to the state it has in the Song Editor. The only way to manually change the muting then is to click the pattern's label in the Song Editor.

Both the Song Editor and the Patterns Panel both reflect the change in muting in the user interface, though with *opposite colors*.

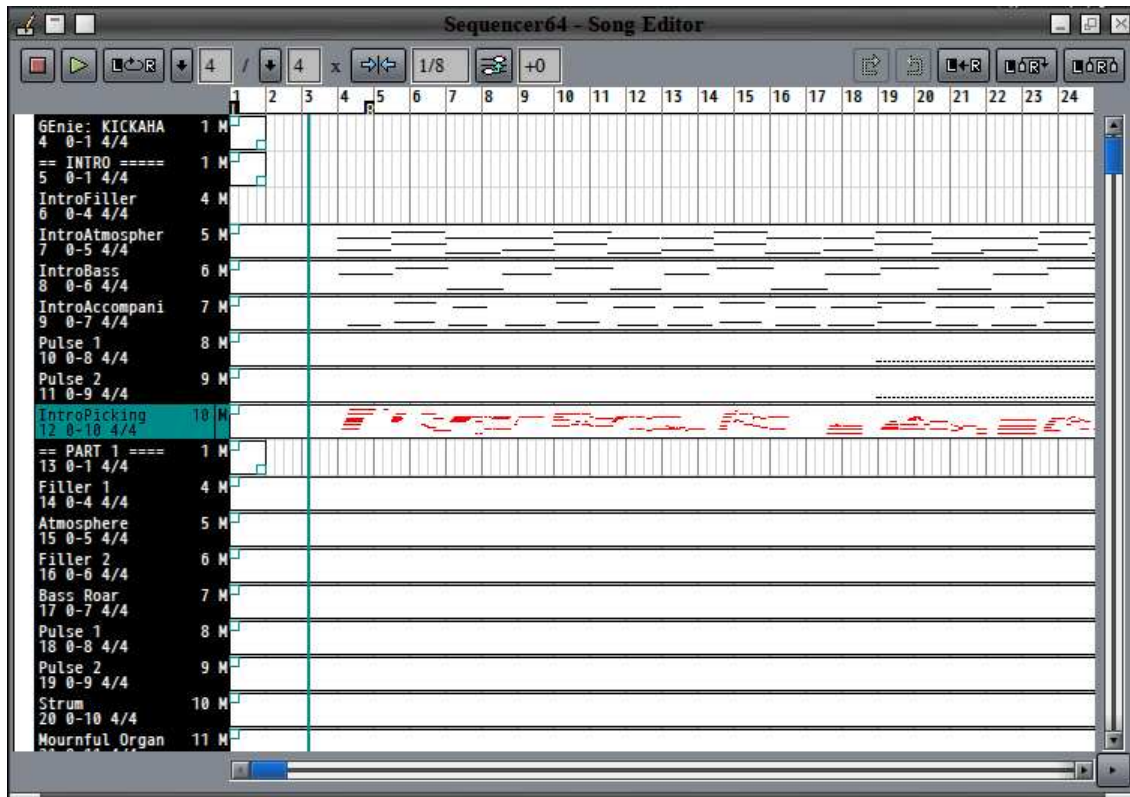


Figure 73: Song Editor Window

New: There are some new features for the song editor, as seen above and in the following figure:

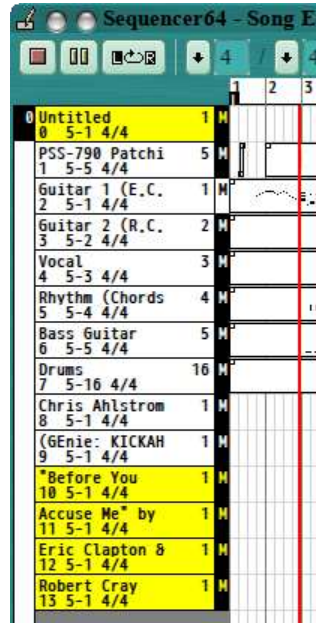


Figure 74: Song Editor Window, New Features

- Toggling of the mute state of multiple patterns by holding the Shift key while left-clicking on the M or a pattern name;
- The new Pause button functionality;
- The optional coloring (about 7 color values are selectable) and thickening of the progress bar.
- A new Redo button (not shown).
- A new Transpose button (not shown).
- Red coloring of events for patterns that are not transposable, such as drum tracks.

New: This dialog (in *Sequencer64*) shows any empty patterns highlighted in yellow. An empty pattern is one that exists, but contains only meta information, and contains no MIDI events that can be played. For example, some tracks just serve as name tracks or information tracks.

The Song Editor is not too complex, but for exposition, we break it into the top panel, the bottom panel, and the rest of the window.

New: There are still more features of the song editor in pending version 0.9.15, as seen in the following figure:



Figure 75: Song Editor Window, Transpose Song

Notice the additional button that allows the whole song (except for exempt, non-transposable sequences) to be transposed up or down by up to an octave in either direction.

5.1 Song Editor / Top Panel

The top panel provides quick access to song-playback actions and configuration.

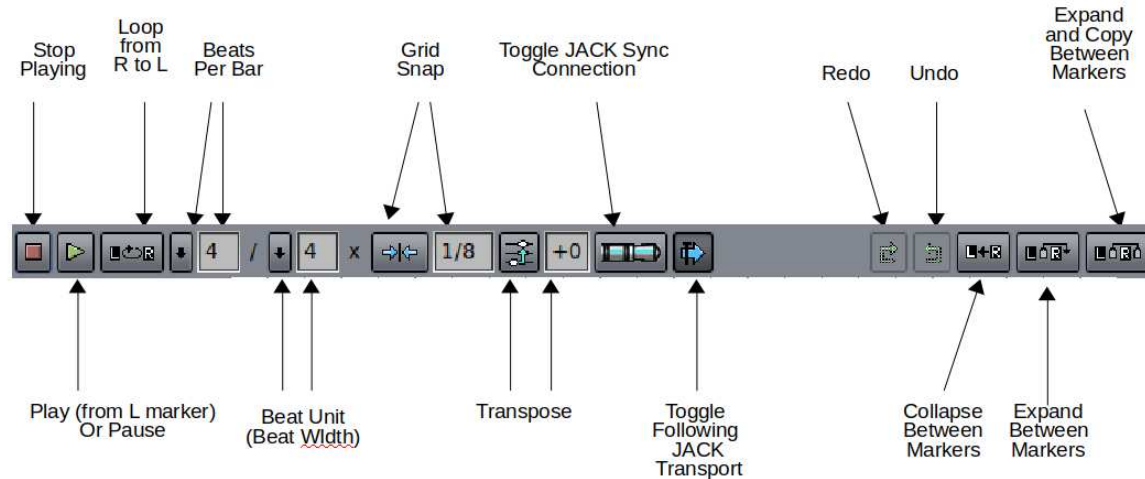


Figure 76: Song Editor / Top Panel Items

1. **Stop**
2. **Play**
3. **Play Loop**
4. **Beats Per Bar**
5. **Beat Unit**
6. **Grid Snap**
7. **Transpose**
8. **Toggle JACK Sync**
9. **Toggle Following JACK Transport**
10. **Redo**
11. **Undo**
12. **Collapse**
13. **Expand**
14. **Expand and copy**

1. Stop. Stops the playback of the song. The keystroke for stopping playback is the **Escape** character. It can be configured to be another character (such as **Space**, which would make the space-bar toggle the playback status).

2. Play. Starts the playback of the song, starting at the **L marker**. The **L marker** serves as the start position for playback in the Song Editor. One can change the start position only when the performance is not playing. The default keystroke for starting playback is the **Space** character. The default keystroke for stopping playback is the **Escape** character. The default keystroke for pausing playback is the **Period** character.

3. Play Loop. Activate loop mode. When Play is activated, play the song and loop between the **L marker** and the **R marker**. This button is a state button, and its appearance indicates when it is depressed, and thus active. If this button is deactivated during playback, then playback will continue past the **R marker**.

4. Beats Per Bar. Part of the time signature, and specifies the number of beat units per bar. The possible values range from 1 to 16.

5. Beat Unit. Also called "beat width". Part of the time signature, and specifies the size of the beat unit: 1 for whole notes; 2 for half notes; 4 for quarter notes; 8 for eighth notes; and 16 for sixteenth notes.

6. Grid Snap. Grid snap selects where the patterns will be drawn. Unlike the **Grid Snap** of the Pattern Editor, the units of the Song Editor snap value are in fractions of a measure length. The following values are supported: 1, 1/2, 1/4, 1/8, 1/16, 1/32, and 1/3, 1/6, 1/12, and 1/24.

7. Redo. The Redo button will reapply the last change that was "undone" by the Undo button. It will be inactive if there is nothing to redo.

8. Undo. The Undo button will roll back the last change in the layout of a pattern. Each time it is clicked, the most recent change will be undone. It will roll back one change each time it is pressed. It is not certain what the undo limit is, however. It will be inactive if there is nothing to undo.

9. Collapse. This button collapses the song between the **L marker** and the **R marker**. What this means is that, if there is song material (patterns) before the **L marker** and after the **R marker**, and the **Collapse** button is pressed, any song material between the L and R markers is wiped out, and the song material after the **R marker** is moved leftward to the **L marker**. Collapsing occurs in all tracks present in the Song Editor.

10. Expand. This button expands the song between the **L marker** and the **R marker**. It inserts blank space between these markers, moving the song material that is after the **R marker** to the right by the duration of the blank space. Expansion occurs in all tracks present in the Song Editor.

11. Expand and copy. This button expands the song between the **L marker** and the **R marker** much like the **Expand** button. However, it also copies the original data that is present after the **R marker**, and pastes it into the newly-available space between the L and R markers.

5.2 Song Editor / Arrangement Panel

The arrangement panel is the middle section shown in [figure 73 "Song Editor Window"](#) on page 86. It is also known as the "piano roll" of the song editor. Here, we zero in on its many features.

Keystrokes and additional mouse configuration have been added to make editing easier even without a good mouse. For example, one can page up and down vertically in the arrangement panel using the Page Up and Page Down keys. One can go to the top using the Home key, to the bottom using the End key. One can page left and right horizontally in the arrangement panel using the Shift Page Up and Shift Page Down keys. One can go to the leftmost position using the Home key, and to the rightmost position using the End key,

The following figure is taken from a conventional MIDI file, imported, with a few long tracks, rather than a large number of smaller patterns. In other words, the patterns used here are very long, and used only once in the song. (We will provide an example that shows off *Sequencer64*'s pattern features better, at some point.)

Please note that, if playback is started with the Song Editor as the active window, then the pattern boxes in the patterns panel will show as armed/unarmed (unmuted/muted) depending upon whether or not the pattern is shown as playing (or not) at the current playback position in the Song Editor piano roll.

The following figure highlights the main features of the center panel of the song editor.

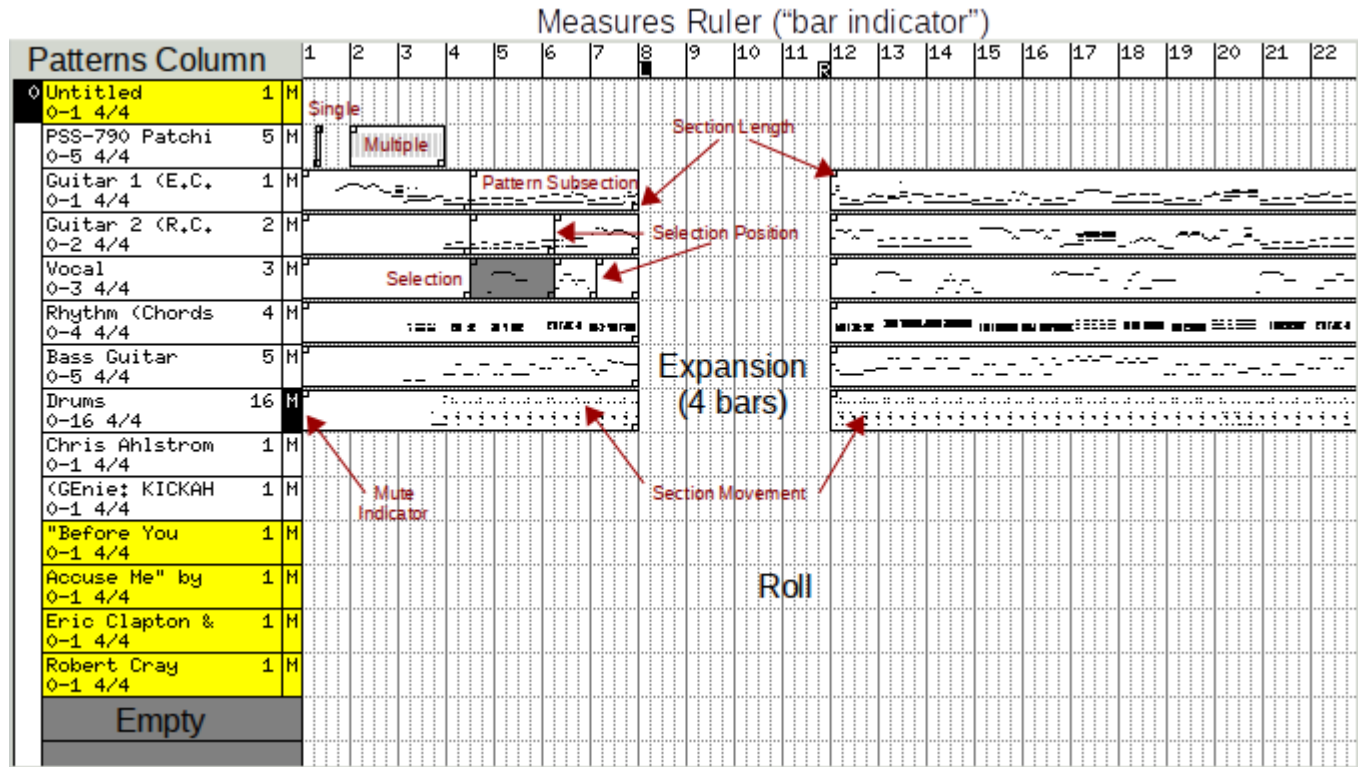


Figure 77: Song Editor Arrangement Panel, Annotated

One new feature of the song editor is that, if the new Transpose feature is built into *Sequencer64*, any patterns that are marked as exempt from transposition (common with drum tracks) have their events shown in red instead of black.

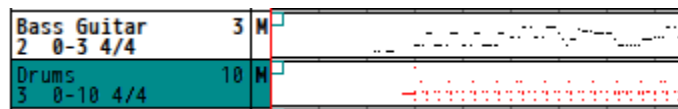


Figure 78: Song Editor for Non-Transposable Patterns

The measures ruler (measures strip) consists of a *measures ruler* (bar indicator) at the top, a numbered patterns column at the left with a muting indicator, and the grid or roll section. There are a lot of hidden details in the arrangement panel, as the figure shows. Here are the main sections we will deal with:

1. **Patterns Column**
2. **Piano Roll**
3. **Measures Ruler**

These items are discussed in the following sections.

5.2.1 Song Editor / Arrangement Panel / Patterns Column

Here are the items to note in the patterns column:

1. **Number.** Not yet sure what the number on the left means. The number of the screen set?
2. **Title.** The title is the name of the pattern, for easy reference.
3. **Channel.** The channel number appears (redundantly) at the right of the title.
4. **Buss-Channel.** This pair of numbers shows the MIDI buss number used in the pattern and the channel used for the pattern.
5. **Beat/Measure.** This pair of numbers is the standard time-signature of the pattern.
6. **Mute Indicator.** The letter M is in a black box if the track/pattern is muted, and a white box if it is unmuted. Left-clicking on the "M" (or the name of the pattern) will mute/unmute the pattern. If the Shift key is held while left-clicking on the M or the pattern name, then the mute/unmute state of every other active pattern is toggled. This feature is useful for isolating a single track or pattern.
7. **Empty Track.** Completely empty tracks (no track events or meta events) are indicated by a dark-gray filling in the pattern column. Tracks that have only meta information, but no playable event, are indicated by a yellow filling in the pattern column.

The patterns column shows a list of all of the patterns that have been created in the current song. Each pattern in this list has a track of pattern layouts associated with it in the piano roll section.

Left-clicking on the pattern name or the "M" button toggles the muting (arming) status of the track. It does the same thing if the **Ctrl** key is held at the same time.

Shift-left-clicking on the pattern name or the "M" button toggles the muting (arming) status of *all other tracks* except the track that was selected. This action is useful for quickly listening to a single sequence in isolation.

Right-clicking on the pattern name or the "M" button brings up the same pattern editing menu as discussed in section 3.2.2 "Pattern" on page 50. Recall that this context menu has the following entries: **Edit...**, **Event Edit...**, **Cut**, **Copy**, **Song**, **Disable Transpose**, and **MIDI Bus**.

5.2.2 Song Editor / Arrangement Panel / Piano Roll

The "Piano Roll" section of the arrangement panel is where patterns or subsections are inserted, deleted, shrunk, lengthened, or moved. Here are the items to note in the annotated Piano Roll area shown in figure 77 "Song Editor Arrangement Panel, Annotated" on page 90:

1. **Single.** In the diagram, under the word "Single", is a very small pattern. It is small because it consists only of some MIDI Program Change messages meant to set the programs on a Yamaha PSS-790 keyboard.
2. **Multiple.** This item is the same pattern as in "Single", but dragged out for multiple repetitions, simply to show how even the shortest patterns can be replicated easily.
3. **Pattern Subsection.** Middle-clicking inside a pattern inserts a selection position marker in it, breaking the pattern into two equal pieces. We call each piece a *pattern subsection*. This division can be done over and over. (Note that, in the Song Editor, a middle-click *cannot* be simulated by ctrl-left-click.)
4. **Selection Position.** A selection position is a marker that divides a pattern into two pieces, called *pattern subsections*. This makes it easy to select smaller portions of a pattern for editing or deleting. It is especially useful for making holes in a pattern. There may be other uses of a selection position that we have not yet discovered.
5. **Selection.** By clicking inside a pattern or a pattern subsection, it darkens (gray) to denote that it is selected. A pattern subsection can be deleted by the Delete key, copied by the **Ctrl-C** key, and

then inserted (one or more times) by the **Ctrl-V** key. When inserted, each insert goes immediately after the current item or the previous insertion. The same can be done for whole patterns.

6. **Section Length.** Looking closely at the diagram where the arrows point, small squares in two corners of the patterns can be seen. By grabbing that square with a left-click, the square can be moved horizontally to either lengthen or shorten the pattern or pattern subsection, if there is room to move in the desired direction. It doesn't matter if the item is selected or not.
7. **Section Movement.** If, instead of grabbing the section length handle, one grabs inside the pattern or pattern subsection, that item can be moved horizontally, as long as there is room. Of course, left-clicking inside the item will also cause it to show as selected. One can also highlight a pattern section (making it gray), then click the **p** key to enter "paint" mode, and move the pattern left or right with the arrow keys. In the near future, movement of selected trigger segments will not require the paint mode to be active just to move the segments left or right.
8. **Expansion.** If, instead of grabbing the section length handle, one grabs inside. Originally, all the long patterns of this sample song were continuous. But, by setting the L and R markers, and using the **Expand** button, we opened up some silent space in the song, just to be able to show it off.

A feature not yet noted is the ability to split a pattern section in the song editor, either in half or at the nearest snap point to the mouse pointer. The kind of split that is done is determined by the setting of the **File / Options / Mouse / Sequencer64 Options / Middle click splits song trigger at nearest snap (instead of halfway point)** setting. To split a pattern, left-click it to highlight it, move the mouse (if not splitting in half) to the desired pointer, and press **Ctrl-left** on the mouse.

The *Seq24* help files refer to work in the Song Editor as the "Performance Editor" or "Performance Mode". Adding a pattern in this window is a bit like adding a note in the Pattern Editor. One clicks, holds, and drags the mouse to insert a copy of the pattern associated with the row in which one is dragging. The longer one drags, the more copies of the pattern that are inserted.

Right-click on the arrangement panel (roll) to enter draw mode, and hold the button. **New:** Just like the Patterns Panel, there is a feature to allow the Mod4 (the Super or Windows) key to keep the right-click in force even after it is released. See 2.2.7.5. Basically, pressing Mod4 before releasing the right-click that allows pattern-adding, keeps pattern-adding in force after the right-click is released. Now pattern can be entered at will with the left mouse button. Right-click again to leave the pattern-adding mode.

New: Another way to turn on the paint mode has been added. To turn on the paint mode, first make sure that the piano roll has the keyboard focus by left-clicking in it, then press the **p** key while in the performance editor. This is just like pressing the right mouse button, but the draw/paint mode sticks (as if the Mod4 mode were in force). While in the paint mode, one can add pattern clips with the left mouse button, via click or drag, and one can highlight a pattern clip and move it with the left and right arrow keys.

In the near future, movement of selected trigger segments will not require the paint mode to be active just to move the segments left or right.

To get out of the paint mode, press the **x** key while in the sequence editor, to "x-scape" (get it? get it?) from the paint mode. These keys, however, do not work (currently) while the sequence is playing.

New: *Sequencer64*, as of version 0.9.10, now supports zoom in the song editor's piano roll. This feature is not accessible via a button or a menu entry – it is accessible only via keystrokes. After one has left-clicked in the piano roll, the **z**, **Z**, and **0** can be used to zoom the piano-roll view. The **z** key zooms out, the **Z** key zooms in, and the **0** key resets the zoom to the default value. The zoom feature also modifies the time-line (measures indicator).

Then simultaneously left-click the mouse to insert one copy of the pattern. The inserted pattern will show up as a box with a tiny representation of the notes visible inside. (Some patterns, however, can be less than a measure in length, resulting in a tiny box.)

To keep adding more copies of the pattern, continue to hold both buttons and drag the mouse rightward.

Middle-click on a pattern to drop a new selection position into the pattern, which breaks the pattern into two equal *pattern subsections*. Each middle-click on the pattern adds a new selection position, halving the size of the subsections as more pattern subsections are added.

When a pattern or a pattern subsection is left-clicked in the piano roll, it is marked with a dark gray filling. When a right-left-hold-drag action is done in this gray area, the result is to *delete* that pattern section or subsection. One can also hit the Delete key to *delete* that pattern section or subsection.

5.2.3 Song Editor / Arrangement Panel / Measures Ruler

The *measures ruler* is the ruled and numbered section at the top of the arrangement panel. It provides a place to put the left and right markers. In the *Seq24* documentation, it is called the "bar indicator".

Left-click in the measures ruler to move and drop an **L marker (L anchor)** on the measures ruler. Right-click in the measures ruler to drop an **L marker (R anchor)** on the measures ruler.

Once these anchors are in place, one can then use the *Collapse* and *Expand* buttons to modify the placement of the pattern events.

Note that the **L marker** serves as the start position for playback in the Song Editor. One can change the start position only when the performance is not playing.

New: Another way to move the L and R markers, a so-called "movement mode" has been added. To turn on the movement mode, first make sure that the piano roll (not the bar indicator!) has the keyboard focus by left-clicking in it at a blank spot, then press the **l** key or **r** key or while in the sequence editor. *There is no visual feedback that one is in the movement mode.* Then press the left or right arrow key to move the "L" or "R" (depending whether **l** or **r** was used to enter the movement mode) markers by one snap value at a time.

To get out of the movement mode, press the **x** key while in the performance editor, to "x-scape" from the movement mode.

5.3 Song Editor / Bottom Panel

The bottom panel is simple, consisting of a stock horizontal scroll bar and a small button, called the **Grow** button.

The **Grow** button adds to the number of measures that exist in the song editor. The visual effect is very subtle, resulting only in a small change in the thumb of the horizontal scroll-bar, unless one is at the right end of the piano roll. Then, one can see the added measures. Usually about 128 at a time are added, but this depends on the value of PPQN in force.

6 Event Editor

The *Sequencer64 Event Editor* is used to view and edit, in detail, the events present in a sequence/pattern/track.

Warning: This dialog is a new feature of *Sequencer64*, and is still a work-in-progress. Basic viewing and scrolling generally work well, and editing, deleting, and inserting events does work. But there are many possible interactions between event links (Note Off events linked to Note On events), performance triggers, and the pattern, performance, and event editor dialogs. Surely some bugs still lurk. If anything bad happens, do *not* press the **Save to Sequence** button! If the application aborts, let the programmer know!

Also note that this editor is not very sophisticated:

1. It requires the user to know the details about MIDI events and data values.
2. It does not present handy dropdown lists for various items.
3. It does not detect any changes made to the sequence in the pattern editor.
4. It does not have any undo function.
5. It cannot mark more than one event for deletion or modification.
6. There is no support for dragging and dropping of events.

If, some day, we find ourselves needing that kind of functionality, then we can add it. There may also be issues with interactions between the event editor and things like the performance editor and triggers. For now, the event editor is a good way to see the events in a sequence, and to delete or modify problematic events. Additionally, it can be used to add **Set Tempo** meta events. Furthermore, if an event is added that has a time-stamp beyond the current length of the sequence, then the length of the sequence is extended. Unlike the event pane in the pattern editor, the event-editor dialog shows all types of events at once.

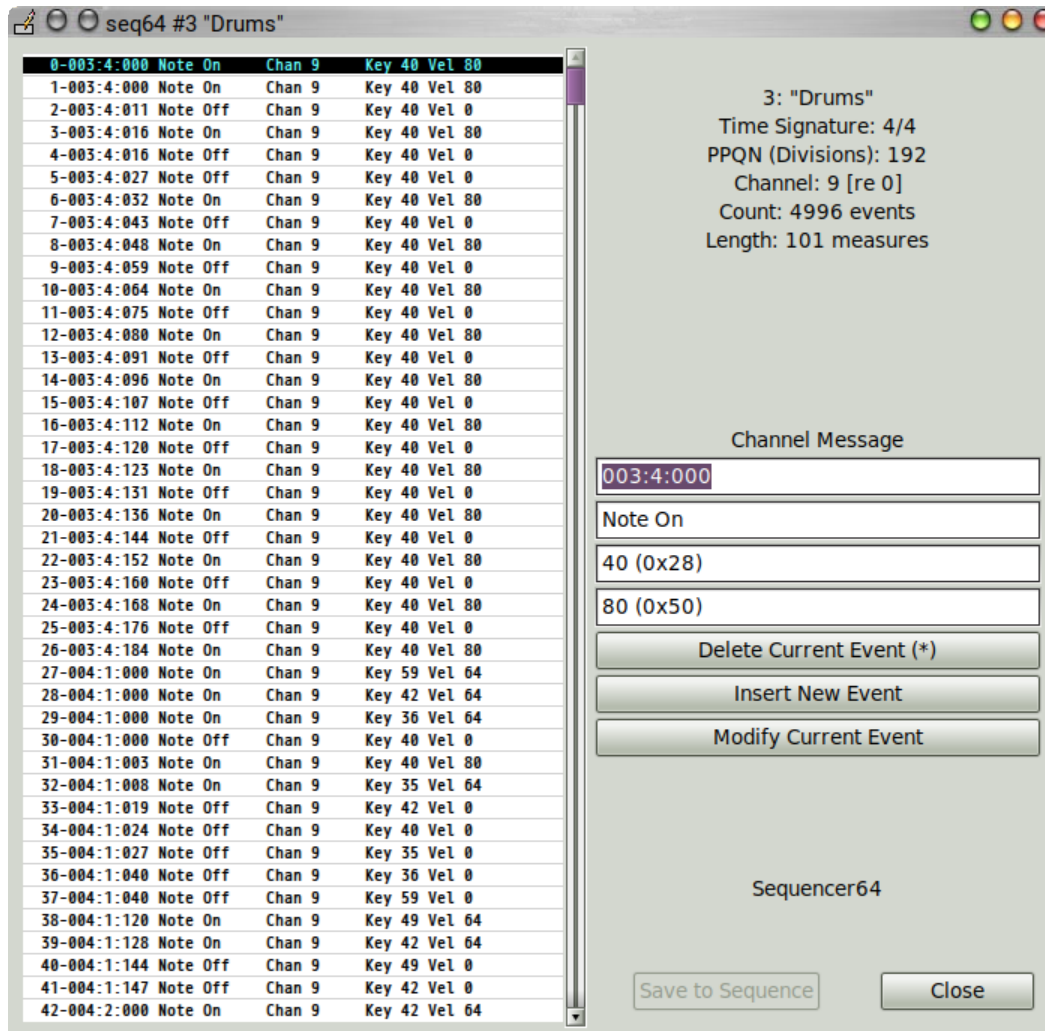


Figure 79: Event Editor Window

The event-editor dialog is fairly complex. For exposition, we break it down into a few sections:

1. **Event Frame**
2. **Info Panel**
3. **Edit Fields**
4. **Bottom Buttons**

The event frame consists of a list of events, which can be viewed, traversed, and edited. The info fields in the info panel show the name of the sequence containing the events, and some other information about the sequence. The edit fields provide four text fields for viewing and entering information about the current event, and buttons to delete, insert, and modify events. The bottom buttons allow changes to be saved and the editor to be closed.

The following sections described these items in detail.

6.1 Event Editor / Event Frame

The event frame is the event-list shown on the left side of the event editor. It is accompanied by a vertical scroll-bar, for moving one line or one page at a time.

Also note that mouse or touchpad scrolling can be used to move up and down in the event list. This movement is even easier than reaching for the scrollbars.

6.1.1 Event Frame / Data Items

The event frame shows a list of numbered events, one per line. The currently-selected event is highlighted in cyan text on a black background. Here is an example of the data line for a MIDI event:

```
17-003:3:128 Note On   Chan 3    Key 66 Vel 107
```

This line consists of the following parts:

1. **Index Number**
2. **Time Stamp**
3. **Event Name**
4. **Channel Number**
5. **Data Bytes**

1. Index Number. Displays the index number of the event. This number is purely for the reference of the user, and is not part of the event. Events in the pattern are numbered from 0 to the number of events in the pattern. They serve as a way to better know where one is in the sequence.

2. Time Stamp. Displays the time stamp of the event. This value indicates the cumulative time of the event in the pattern. It is displayed in the format of "measure:beat:divisions". The measure values start from 1, and range up to the number of measures in the pattern. The beat values start from 1, and range up to the number of beats in the measure. The division values range from 0 up to one less than the PPQN (pulses per quarter note) value for the whole song. As a shortcut, one can use the dollar sign ("\$\$") to represent PPQN-1.

3. Event Name. Displays the name of the event. The event name indicates what kind of MIDI event it is. The following event names are supported:

1. **Note Off**
2. **Note On**
3. **Aftertouch**
4. **Control Change**
5. **Program Change**
6. **Channel Pressure**
7. **Pitch Wheel**

Note that these are all MIDI *channel events*. Support for MIDI *system events* is in place, but is not ready for exposure to the user.

4. Channel Number. Shows the channel number (for channel-events only). Be sure to note that, for the user, MIDI channels always range from 1 to 16. (Internally, they range from 0 to 15).

5. Data Bytes. Shows the one or two data bytes for the event.

Note Off, Note On, and Aftertouch events requires a byte for the key (0 to 127) and a byte for the velocity (also 0 to 127). Control Change events require a control code and a value for that control code. Pitch wheel events require two bytes to encode the full range of pitch changes.

Program change events require only a byte value to pick the patch or program (instrument) to be used for the sequence. The Channel Pressure event requires only a one-byte value.

6.1.2 Event Frame / Navigation

Moving about in the event frame is fairly straightforward, but has some wrinkles to note. (It was more difficult to get working than expected!)

Navigation with the mouse is done by moving to the desired event and clicking on it. The event becomes highlighted, and its data items are shown in the "info panel" (discussed in the next section). There is currently no support for dragging and dropping events in the event frame.

The scrollbar can be used to move within the frame, either by one line at a time, or by a page at a time. A page is defined as one frame's worth of lines, minus 5 lines, for some overlap in paging.

Navigation with keystrokes is also supported, for the Up and Down arrows and the Page-Up and Page-Down keys. Note that using the Up and Down arrows by holding them down for awhile causes autorepeat to kick in, and the updates become very erratic and annoying. Use the scrollbar or page keys to move through multiple pages. Home and End also work.

6.2 Event Editor / Info Panel

The "info panel" is simply a read-only list of properties on the top right of the event editor. It serves to remind the user of the sequence being edited and some characteristics of the sequence and the whole song. Currently, five items are shown:

1. **Sequence Name.** This item is redundant, as the window caption for the event editor also shows the sequence name. It can be set in the pattern editor.
2. **Time Signature.** This item is a sequence property. It can be set in the pattern editor.
3. **PPQN** This item shows the "parts per quarter note", or resolution of the whole song. The default PPQN of *Sequencer64* is 192.
4. **Sequence Channel** In *Sequencer64*, the channel number is a property of the sequence. All channel events in the sequence get routed to the same channel, even if somehow the event itself specifies a different channel.
5. **Sequence Count** Displays the current number of events in the sequence. This number changes as events are inserted or deleted.

6.3 Event Editor / Edit Fields

The edit fields show the values of the currently-selected event. They allow changing an event, adding a new event, or deleting the currently-selected event.

1. **Event Category** (read-only)
2. **Event Timestamp**
3. **Event Name**
4. **Data Byte 1**
5. **Data Byte 2**

6. Delete Current Event**7. Insert New Event****8. Modify Current Event**

It is important to note that changes made in the event editor are *not* written to the sequence until the **Save to Sequence** button is clicked. If one messes up an edit field, just click on the event again; all the fields will be filled in again. That's as much "undo" as the event-editor offers at this time, other than closing without saving.

1. Event Category. Displays the event category of the event. Currently, only channel events can be handled, but someday we hope to handle the wide array of system events, and perhaps even system-exclusive events.

2. Event Timestamp. Displays the timestamp of the event. Currently only the "measure:beat:division" format is fully supported. We allow editing (but not display) of the timestamp in pulse (divisions) format and "hour:minute:second.fraction" format, but there are bugs to work out.

If one wants to delete or modify an event, this field does not need to be modified. If this field is modified, and the **Modify Current Event** button is pressed, then the event will be moved. This field can locate a new event at a specific time. If the time is not in the current frame, the frame will move to the location of the new event and make it the current event.

3. Event Name. Displays the name of the event, and allows entry of an event name. The event name indicates what kind of MIDI event it is. The following event names are supported:

1. **Note Off**
2. **Note On**
3. **Aftertouch**
4. **Control Change**
5. **Program Change**
6. **Channel Pressure**
7. **Pitch Wheel**

Typing in one of these names should change the kind of event if the event is modified. Abbreviations and case-insensitivity can be used to reduce the effort of typing.

Bug: Currently, the handling of the editing of the event name is a bit clumsy. Also, it would be better to provide a drop-down list for more painless selection of events.

4. Data Byte 1. Allows the modification of the first data byte of the event. One must know what one is doing. The scanning of the digits is very simple: start with the first digit, and convert until a non-digit is encountered. The data-byte value can be entered in decimal notation, or, if prepended with "0x", in hexadecimal notation.

5. Data Byte 2. Allows the modification of the second data byte of the event (if applicable to the event). One must know what one is doing. The scanning of the digits is very simple: start with the first digit, and convert until a non-digit is encountered. The data-byte value can be entered in decimal notation, or, if prepended with "0x", in hexadecimal notation.

6. Delete Current Event. Causes the currently-selected event to be deleted. The frame display is updated to move following events upward.

Sequencer64 would support using the Delete and Insert keys to supplement the buttons, but the Delete key is needed for editing the event data fields. The current structure of the dialog prevents using it for both the frame and the edit fields. Therefore, *Sequencer64* allows the usage of the asterisk keys (both regular and keypad) for deletion.

7. Insert New Event. Inserts a new event, described by the **Event Timestamp**, **Event Name**, **Data Byte 1**, and **Data Byte 2** fields. The new event is placed in the appropriate location for the given timestamp. If the timestamp is at a time that is not visible in the frame, the frame moves to show the new event, so be careful.

8. Modify Current Event. Deletes the current event, and inserts a new event. The modified event is placed in the appropriate location for the given timestamp.

6.4 Event Editor / Bottom Buttons

The buttons at the bottom of the event editor round out the functionality of this dialog.

1. **Save to Sequence**
2. **Close**

1. Save to sequence. Saves the current state of the event container back to the sequence from whence the events came. This button does not close the dialog; further editing can be performed. The Save button is enabled only if some unsaved changes to the events still exist.

Note that there may still be some subtle bugs in the dialog editor, so be careful about pressing this button.

Also note that any sequence/pattern editor that is open should be reflected in the pattern editor once this button is pressed. However, at present, simultaneous use of the pattern editor and event editor has been disabled.

If both the event editor and the pattern editor are open for a sequence (currently disabled), and some events are deleted in the event editor, and the **Save to Sequence** button is pressed, the pattern editor would crash and takes down *Sequencer64* with it. Therefore, when either editor is open for a given sequence, the right-click menu entries that bring them up are hidden.

2. Close. Closes the event editor. Any unsaved event changes are discarded. There is a "modification indicator" to show that the events have been modified.

Again, good luck with the dialog. Bug reports are appreciated.

7 Sequencer64 Keyboard and Mouse Actions

This section presents some tables summarizing the keyboard and mouse actions available in *Sequencer64*. It does not cover the mute keys and the groups keys, which are well described in the keyboard setup for the main window (where "live" performance is controlled; see section [2.2.7.3 "Menu / File / Options / Keyboard"](#) on page 27). It also does not cover the "fruity" mouse actions, though they are touched on in section [2.2.7.5 "Menu / File / Options / Mouse"](#) on page 33. Any volunteers to fill in the table?

This section describes the keystrokes that are currently hardwired in *Sequencer64*. This description only includes items not defined in the **File / Options** dialog. That is, hardwired values. Note that "KP" stands for "keypad".

7.1 Main Window

The main window keystrokes are all defined via the options dialog and "rc" configuration file, or are stock Gtk window-management keystrokes. The main window has a very complete setup for live control

of the MIDI tune via keystrokes. These actions are not included in table 1 "Main Window Support" on page 100. There may be some other keystrokes to be documented at some point.

Table 1: Main Window Support

Action	Normal	Double	Shift	Ctrl	Mod4
e key	—	—	—	Open song editor	—
Left-click slot	Mute/Unmute	New/Edit	Toggle other slots	Edit	—
Right-click slot	Edit menu	—	Edit menu	Edit/Edit Menu	—

The new mouse features of this window for *Sequencer64*, as noted in section 3 "Patterns Panel" on page 41, are:

- *Shift-left-click*: Over one pattern slot, this action toggles the mute/unmute (armed/unarmed) status of all other patterns (even the patterns in other, unseen sets).
- *Left-double-click*: Over a pattern slot, this action quickly toggles the mute/unmute status, which is confusing. But it ultimately brings up the pattern editor (sequence editor) for that pattern. It acts like Ctrl-left-click.

7.2 Performance Editor Window

The "performance editor" window is also known as the "song editor" window. It's main sections are the "piano roll" (perfrill) and the "performance time" (perftime) sections, discussed in the following sections. Also, some keystrokes are handled by the frame of the window.

- Ctrl-z. Undo.
- Ctrl-r. Redo.

7.2.1 Performance Editor Piano Roll

- Ctrl-x. Cut.
- Ctrl-c. Copy.
- Ctrl-v. Paste.
- Ctrl-z. Undo.
- Ctrl-r. Redo.
- Shift-Up. Move backward one small unit (which is...?)
- Shift-Down. Move forward one small unit (which is...?)
- Shift-Page Up. Move backward one frame.
- Shift-Page Down. Move forward one frame.
- Shift-Home, Shift-KP Home. Move to beginning of piano roll.
- Shift-End, Shift-KP End. Move to end of piano roll.
- Shift-z (Z). Zoom in.
- 0. Set default zoom.
- z. Zoom out.
- Left. Move item left one snap unit.
- Right. Move item right one snap unit.
- Up. Move frame up one small scroll unit.

- **Down.** Move frame down one small scroll unit.
- **Home.** Move to top of piano roll.
- **End.** Move to bottom of piano roll.
- **Page Up.** Move up one frame (page-increment).
- **Page Down.** Move down one frame (page-increment).

Note that the keystrokes in this table (see table 2 "Performance Window Piano Roll" on page 101) require that the focus first be assigned to the piano roll by left-clicking in an empty area within it. Otherwise, another section of the performance editor might receive the keystroke.

Table 2: Performance Window Piano Roll

Action	Normal	Double	Shift	Ctrl	Mod4
Space	Start playback	—	—	—	—
Esc	Stop playback	—	—	—	—
Period (.)	Pause playback	—	—	—	—
Del	Cut section	—	—	—	—
c key	—	—	—	Copy	—
p key	Paint mode	—	—	—	—
v key	—	—	—	Paste	—
x key	Escape paint	—	—	Cut	—
z key	Zoom out	—	—	Undo	—
0 key	Reset zoom	—	—	—	—
Z key	Zoom in	—	—	Undo	—
Left-arrow	Move earlier	—	—	—	—
Right-arrow	Move later	—	—	—	—
Left-click	Select section	—	Toggle other slots	—	—
Right-click	Paint mode	—	Paint mode	Paint mode	Lock Paint mode
Scroll-up	Scroll up	—	Scroll Left	Scroll Up	—
Scroll-down	Scroll down	—	Scroll Right	Scroll Down	—

This section of the performance editor also handles the start, stop, and pause keys. These can be modified in the **Options / Keyboard** page.

Note that a "section" in the performance editor is actually a box that specifies a trigger for the pattern in that sequence/pattern slot.

Note that the "toggle other slots" action occurs only if shift-left-clicked in the "names" area of the performance editor.

Note that left-click is used to select performance blocks if clicked within a block, or to deselect them if clicked in an empty area of the piano roll. Also note that all scrolling is done by the internal horizontal and vertical step increments. The new features of this window for *Sequencer64*, as noted in section 5 "Song Editor" on page 85, are:

- **p:** Enters the paint mode, until right-click is pressed or until the "x" key is pressed.
- **x:** Exits the paint mode. Think of the made-up term "x-scape".
- **z:** Zooms out the performance view. It makes the view look smaller, so that more of the performance can be seen. Please note that opening a second performance view is another way to see more of the performance.

- *0*: Resets the performance view zoom to its normal value.
- *Z*: Zooms in the performance view. It makes the view look bigger, so that more details of the performance can be seen.
- *.*: The period (configurable) is a new key devoted to the new pause functionality.
- *Left Arrow*: Moves the selected item to the left (earlier in time) in the performance layout.
- *Right Arrow*: Moves the selected item to the right (later in time) in the performance layout.
- *Mod4-right-click, release*: Locks the paint mode, until right-click is pressed again later.
- Once selected (and thus rendered in grey), a pattern section (trigger) can be moved by the mouse. To move it using the left or right arrow keys, the paint mode must be entered, but only via the "p" key – the right mouse button deselects the greyed pattern. Too tricky, we might try fixing it later.

7.2.2 Performance Editor Time Section

- *l*. Set to move L marker.
- *r*. Set to move R marker.
- *x*. Escape ("x-scape") the movement mode.
- *Left*. Move the selected marker left.
- *Right*. Move the selected marker right.

This section of the performance editor is also known as the "measure ruler" or the "bar indicator", and is discussed in section 5.2.3 "Song Editor / Arrangement Panel / Measures Ruler" on page 93. See table 3 "Performance Editor Time Section" on page 102.

Table 3: Performance Editor Time Section

Action	Normal	Double	Shift	Ctrl	Mod4
<i>l</i>	Move L [1]	—	—	—	—
<i>r</i>	Move R [1]	—	—	—	—
<i>x</i>	Escape Move	—	—	—	—
Left-Click	Set L [2]	—	—	—	—
Middle-Click	—	—	—	—	—
Right-Click	Set R [2]	—	—	—	—

1. Activates movement of this marker using the left and right arrow keys. Movement is in increments of the snap value. This mode is exited by pressing the 'x' key. Also see note [2].
2. Controlled in the pertime section.

The new features of this window for *Sequencer64*, as noted in section 5.2.3 "Song Editor / Arrangement Panel / Measures Ruler" on page 93, are:

- *l*: Enters a mode where the left and right arrow keys move the L marker, until the "x" key is pressed.
- *r*: Enters a mode where the left and right arrow keys move the R marker, until the "x" key is pressed.
- *x*: Exits the marker-movement mode.

7.2.3 Performance Editor Names Section

Table 4: Performance Editor Names Section

Action	Normal	Double	Shift	Ctrl	Mod4
Left-Click	Toggle track	—	Toggle other tracks	—	—
Middle-Click	—	—	—	—	—
Right-Click	New/Edit menu	—	—	—	—

7.3 Pattern Editor

The pattern/sequencer editor piano roll is a complex and powerful event editor; table 5 "[Pattern Editor Piano Roll](#)" on page 104, doesn't begin to cover its functionality. Here are the keystrokes handle by the main frame of the window:

- **Ctrl-L.** Bring up the LFO event modulation editor, if built into this version (0.9.20 and above) of *Sequencer64*.
- **Ctrl-W.** Exit the sequence (pattern) editor.
- **Ctrl-Page Up.** Zoom in.
- **Ctrl-Page Down.** Zoom out.
- **Shift-Page Up.** Scroll leftward.
- **Shift-Page Down.** Scroll rightward.
- **Shift-Home.** Scroll leftward to the beginning.
- **Shift-End.** Scroll rightward to the end.
- **Shift-z (Z).** Zoom in.
- **0.** Set default zoom.
- **z.** Zoom out.
- **Page Down.** Scroll downward.
- **Page Up.** Scroll upward.
- **Home.** Scroll upward to the beginning.
- **End.** Scroll downward to the end.

Where is Delete?

7.3.1 Pattern Editor Piano Roll

Here are the keystrokes handled by the piano roll: These keystrokes require that the focus be set to the piano roll by clicking in it with the mouse.

- **Ctrl-x.** Cut.
- **Ctrl-c.** Copy.
- **Ctrl-v.** Paste.
- **Ctrl-z.** Undo.
- **Ctrl-r.** Redo.
- **Ctrl-a.** Select all.
- **Ctrl-Left.** Shrink selected notes.
- **Ctrl-Right.** Grow selected notes.

- **Delete.** Remove selected notes.
- **Backspade.** Remove selected notes.
- **Home.** Set sequence to beginnging of sequence. (Verify!)
- **Left.** Move selected notes one snap left.
- **Down.** Move selected notes one pitch downward.
- **Up.** Move selected notes one pitch upward.
- **Enter, Return.** Paste the selected notes at the current position.
- **p.** Enter "paint" (also known as "adding") mode.
- **x.** Escape ("x-scape") the paint mode.

And here is the table:

Table 5: Pattern Editor Piano Roll

Action	Normal	Double	Shift	Ctrl	Mod4
Del	Delete Selected	—	—	—	—
c	—	—	—	Copy	—
p	Paint mode	—	—	—	—
v	—	—	—	Paste	—
x	Escape Paint	—	—	Cut	—
z	Zoom Out	—	—	Undo	—
0	Reset Zoom	—	—	—	—
Z	Zoom In	—	—	Undo?	—
Left-Arrow	Move Earlier [1]	—	—	—	—
Right-Arrow	Move Later [1]	—	—	—	—
Up-Arrow	Increase Pitch	—	—	—	—
Down-Arrow	Decrease Pitch	—	—	—	—
Left-Click	Deselect	—	—	—	—
Right-Click	Paint mode	—	Edit Menu	Edit/Edit Menu	Lock Paint mode
Left-Middle-Click	Grow Selected	—	Stretch Sel.	—	—
Scroll-Up	Zoom Time In	—	Scroll Left	Zoom Time In	—
Scroll-Down	Zoom Time Out	—	Scroll Right	Zoom Time Out	—

- Once selected (and thus rendered in grey), a pattern segment can be moved by the mouse. To move it using the left or right arrow keys, the paint mode must be entered, but only via the **p** key – the right mouse button deselects the greyed pattern. Too tricky, we might try fixing it later.

The new features of this window section for *Sequencer64*, as noted in section 4.3.1 "Pattern Editor / Piano Roll Items" on page 74, are:

- **p:** Enters the paint mode, until right-click is pressed or until the **x** key is pressed.
- **x:** Exits the paint mode. Think of the made-up term "x-scape".
- **z:** Zooms out the performance view. It makes the view look smaller, so that more of the performance can be seen. Please note that opening a second performance view is another way to see more of the performance.
- **0:** Resets the performance view zoom to its normal value.
- **Z:** Zooms in the performance view. It makes the view look bigger, so that more details of the performance can be seen.

- **.**: The period (configurable) is a new key devoted to the new pause functionality.
- **Left Arrow**: Moves the selected events to the left (earlier in time) in the performance layout.
- **Right Arrow**: Moves the selected events to the right (later in time) in the performance layout.
- **Up Arrow**: Moves the selected notes upward in direction and pitch.
- **Down Arrow**: Moves the selected notes downward in direction and pitch.
- **Mod4-Right-Click**: Locks the paint mode, until right-click is pressed again later.

7.3.2 Pattern Editor Event Panel

- **Ctrl-x**. Cut.
- **Ctrl-c**. Copy.
- **Ctrl-v**. Paste.
- **Ctrl-z**. Undo.
- **Delete**. Delete (not cut!) the selected events.
- **p**. Enter "paint" (also known as "adding") mode.
- **x**. Escape ("x-scape") the paint mode.

7.3.3 Pattern Editor Data Panel

Currently, no keystroke support is provided in the data panel. One potential upgrade would be the ability to change the value of the event with the Up and Down arrow keys.

7.3.4 Pattern Editor Virtual Keyboard

Table 6: Pattern Editor Virtual Keyboard

Action	Normal	Double	Shift	Ctrl	Mod4
Left-Click	Play note	—	—	—	—
Right-Click	Toggle labels	—	—	—	—

7.4 Event Editor

- **Down**. Move one slot down.
- **Up**. Move one slot up.
- **Page Down**. Move one frame down.
- **Page Up**. Move one frame up.
- **Home**. Move to top frame.
- **End**. Move to bottom frame.
- **Asterisk**, **KP Multiply**. Delete the currently-selected event.

8 Sequencer64 Meta Event / SysEx Support

In recent versions of *Sequencer64* we are attempting better support for MIDI Meta and System Exclusive events, as well as a Tempo track. At present (v. 0.93+), *Sequencer64* now supports the display of Set Tempo and Time Signature events. They can also be added and edited, in various ways. For example,

see section 6 "Event Editor" on page 93. Only the first Time Signature event is used to modify playback. System Exclusive support is also still in progress.

This section consolidates the description of the meta-event support. The following topics apply:

1. Tempo display min/max in "usr" settings.
2. Tempo display in main window.
3. Tempo display in pattern editor.
4. Tempo display in song editor.
5. Tempo and Time signature display and editing in the event editor.

Before we discuss these items, we need to note *how* the tempo track is implemented in *Sequencer64*. Rather than make a SeqSpec track for the tempo events, we follow the MIDI specification, which mandates that Tempo events must occur only in the first track. *Sequencer64* has been upgraded so that Set Tempo and Time Signature events are full-fledged MIDI events and can be viewed (and later, edited) in the existing user-interface elements. Notes and other events can occur in the same track, if the user-musician so desires.

To reiterate, track 1 (pattern 0) is the only track where tempo events can be placed and edited.

8.1 "usr" BPM Display Settings

Sequencer64 allows the tempo to range from 1 to 600 BPM (beats per minute). This range is hardwired into the application. But we need to be able to display tempo with a little more granularity. Therefore, *Sequencer64* provides some scaling for the tempo displays. These values are found in the "usr" file:

```
0          # midi_bpm_minimum
360        # midi_bpm_maximum
```

See section 10.4 "Sequencer64 "usr" File / User MIDI Settings" on page 140, for more information. This setting can only be made by editing the "usr" file while *Sequencer64* is not running. Note that this setting affects the global BPM setting ("c.bpmtag").

8.2 Composite Display of Tempos

The following figure shows a composite picture of the various representations of Set Tempo events.

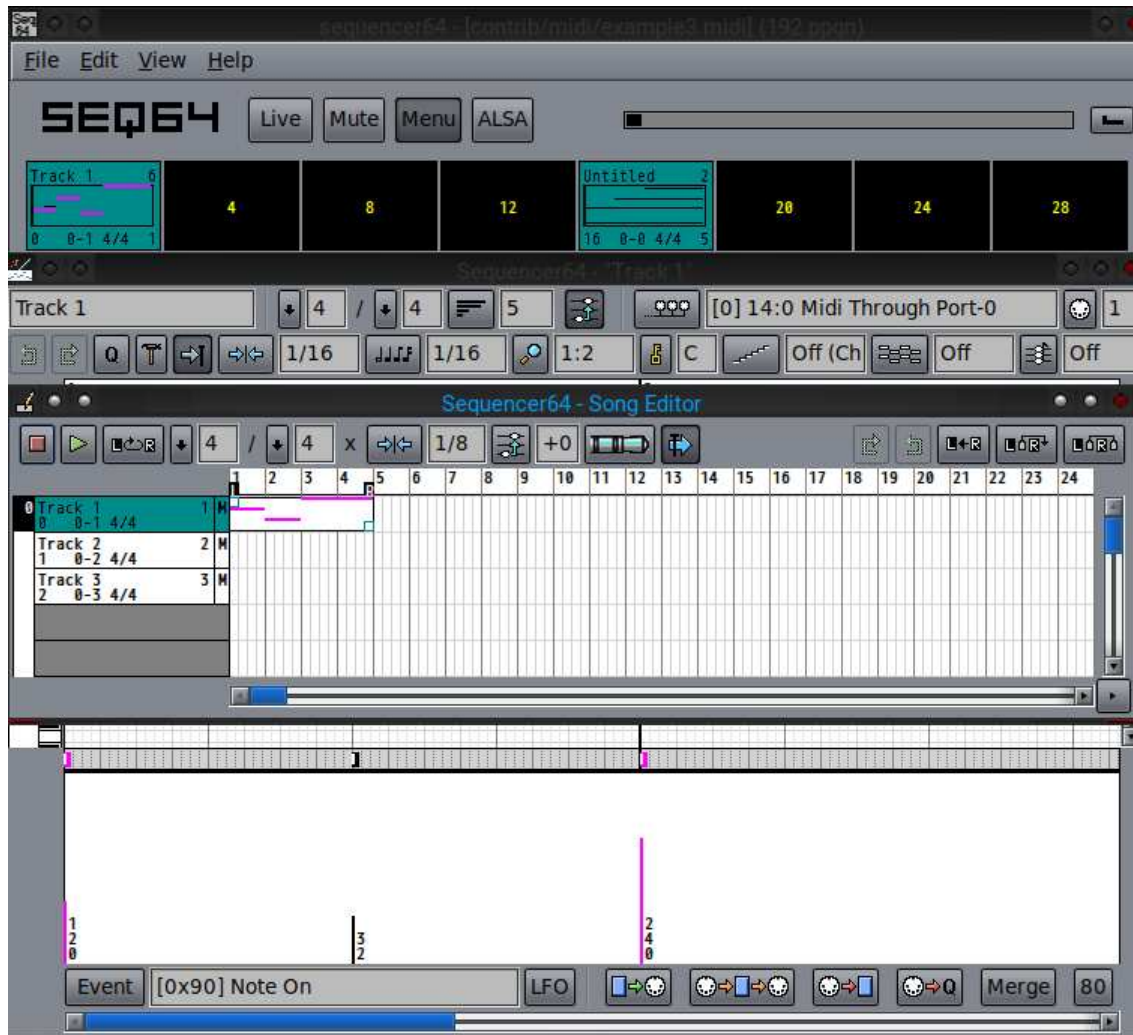


Figure 80: Various Tempo Displays

The top of the figure shows the magenta tempo lines in a pattern slot that is currently being edited. This view cannot be directly edited, but the event editor and the main window's BPM settings can be used to add, delete, or adjust the tempo.

The middle shows the very similar representation of the tempo in the Song Editor. Again, this view does not (currently) allow editing of the tempo events.

The bottom shows tempo as an event (in the event strip) and a data value in the data pane. A tempo event can be added here by holding the Ctrl key and painting an event in the event strip, and it can then be modified by same method that note velocities can be edited. Note that tempo events are *always* shown in the event strip and the data pane, no matter what other **Event** type has been selected.

8.3 Tempo in the Main Window

The tempo is shown as a solid magenta-colored line at the relative height for the tempo, based on the minimum and maximum values configured in the "usr" file as discussed in the previous section. This pattern-slot tempo display is rudimentary. It doesn't allow for ramping of the tempo at present (except

by recording while holding the BPM spin-control), and cannot be directly edited in this window. However, tempos can be logged or recorded via magenta-colored controls at the bottom of the main window.



Figure 81: Tempo Recording Controls

The 0th pattern slot shown in the figure represents Track 1, the MIDI Tempo track. The magenta lines show the tempos already in that track. Now look at the BPM control. The first button to its right ("0") is the tempo-tap button, used for setting a tempo by tapping in time to music. The light-magenta button that comes next, when pressed while playback is occurring, logs a tempo event at the current progress location and the current BPM value in the BPM spin-field. The dark magenta button to the right of that toggles the mode of recording the changes to the BPM spin-button while playback is occurring. (The "Q" button is for keep-queues, and is unrelated to tempo processing.)

Now, although track 1 (pattern 0) might start out with a length of only a measure or two, the performance continually ticks upward, and tempo events that are recorded after the end of the track at still recorded, and *they will extend the length of the tempo track automatically*. If the "show sequences key" option is enabled, the length of each track, in measures, is shown at the top right of each main window pattern slot, so it can be tracked by the user.

Once tempo events have been recorded, they can be tweaked (or deleted) either in the pattern editor or in the event editor. Generally, they are treated like control events that are always available. Deleting all tempo events will not reduce the (possibly new) length of the sequence.

One more thing to note about the Tempo track is that it will *not* change tempo unless that track is unmuted. This behavior is a feature, not a bug.

9 Sequencer64 "rc" Configuration File

There are two *Sequencer64* configuration files: `sequencer64.rc` and `sequencer64.usr`. See section 10 "Sequencer64 "usr" Configuration File" on page 128; it describes the "usr" file. They are bit different in how they are handled.

The *Sequencer64* configuration file originally was named `.seq24rc`, and it was stored in the user's `$HOME` directory. This is the same name used by *Seq24*, so we created an new file to take its place, with a fall-back to the original file-name if the new file does not exist, or if *Sequencer64* is running in legacy mode.

After you run *Sequencer64* for the first time (in non-legacy mode), it will generate a `sequencer64.rc` file in your home directory:

```
/home/ahlstrom/.config/sequencer64/sequencer64.rc
```

It contains the the data for remote MIDI control, computer keyboard control, MIDI clock, JACK transport, and a few other settings.

Sequencer64 will overwrite the `sequencer6.rc` file upon quitting. One should therefore quit *Sequencer64* before making manual modifications to the `sequencer64.rc` file. Note that most of its settings can be modified in the **Options** dialog (see section 2.2.7 "Menu / File / Options" on page 21). There is an old, but complete, example of the *Seq24* "rc" file at [25]. It includes a setup for the Novation Launchpad device.

9.1 Sequencer64 "rc" File / MIDI Control Section

Like *Seq24*, *Sequencer64* provides a way to control the application to some extent via a MIDI controller, such as a MIDI keyboard or a MIDI pad device. The current section describes this feature; additional resources and ideas can be found at linuxaudio.org ([14]).

For each pattern, we can set up MIDI events to turn a pattern on, off, or to toggle it. This setup is in the MIDI Control section of `sequencer64.rc`, and begins with the "INI-style" group marker `[midi-control]`. Each MIDI control line has the following format (ignore the explanatory lines):

```

----- on/off
| ----- inverse
| | ----- MIDI status (event) byte (e.g. note on)
| | | ----- data 1 (e.g. note number)
| | | | ----- data 2 min
| | | | | ----- data 2 max
| | | | |
v v v v v v
74 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
Index Toggle On Off
```

The first number is an index number, starting at 0. It indicates what function the control line will affect. The numbers in the leftmost brackets define a *toggle* filter; the numbers in the middle brackets

define a *on* filter; the numbers in the ightmost brackets define a *off* filter. The numbers inside the brackets define six values that set up the control: **on/off**; **inverse**; **MIDI status byte**; **data1**; **data2 min**; and **data2 max**. This set of values is explained below.

The MIDI control setup resembles a matrix. The first block of matrix elements, the entries numbered from 0 to 63, represent control for control functions (toggle, mute, unmute) of the active screen-set. The first 32 of these values represent the immediate mute/unmute functions that correspond to the hot-keys assigned in the **File / Options / Keyboard / Control keys [keyboard-group]** configuration panel. The second 32 of these values represent the same actions as the the **File / Options / Keyboard / Mute-group slot [mute-group]** configuration panel. See section 2.2.7.3 "Menu / File / Options / Keyboard" on page 27. Legacy control keys occupy the entries from 64 to 73. These entries control *Sequencer64* actions like changing the BPM value, screen-set, etc. *Sequencer64* adds some more entries, from 74 to 83, to control additional *Sequencer64* functions such as performance record, solo, etc.

The [midi-control] section is explicitly broken into subsections; those subsections are marked with comment-lines for better comprehensibility. The subsections of the MIDI Control section are:

1. **Pattern group.** Consists of 32 lines (0 to 31), one for each pattern box shown in the Pattern window. It provides a way to control the arming/disarming (muting/unmuting) of each pattern shown in the main window. Note that the main window shows the *active* screen-set. These controls affect the *active* screen-set.
2. **Mute-in group.** Consists of 32 lines (32 to 63), one for each pattern box shown in the Pattern window. It provides a way to control the mute groups. A group is a set of sequences that can arm their playing state together; every group contains all 32 sequences in the *active* screen-set.
3. **Automation group.** Each item in this group consists of one line. Each line specifies a MIDI event that can cause a given *Sequencer64* user-interface operation to occur.
 1. **bpm up.** This MIDI control increments the beats-per-minute setting, as if the up-arrow has been clicked, or the up-arrow key pressed, in this control. This increment is the "step increment" which defaults to 1, but can be modified by changing the "bpm_step_increment" value in the "usr" configuration file. See section 10.4 "Sequencer64 "usr" File / User MIDI Settings" on page 140.
 2. **bpm down.** Similarly, this MIDI control decrements the beats-per-minute setting, as if the down-arrow has been clicked/pressed.
 3. **screen-set up.** This MIDI control increments to the next screen-set. Once the screen-set has been altered, mute-groups and other actions apply to that screen set.
 4. **screen-set down.** Similarly, this MIDI control decrements to the previous screen-set.
 5. **mod replace.** This MIDI control sets the "replace" status flag. Then, when the user manually clicks a pattern slot, that pattern is unmuted, and all the rest are muted. This works whether in "Live" or "Song" mode.
 6. **mod snapshot.** This MIDI control causes the playing statuses of all active (i.e. having data) patterns to be saved. When turned off, the original playing status is restored. Thus, two MIDI events need to be allocated to this functionality. Compare to section section 3.2.3.1 "Pattern Keys" on page 55 for a better idea of how it works.
 7. **mod queue.** This MIDI control sets up the "queue" status flag. Then, when the user manually clicks a pattern slot, that pattern is queued, and will play at the next cycle of the pattern.
 8. **mod gmute.** This MIDI control sets up a "mute group". More to come on this one, see section 3.1 "Patterns / Top Panel" on page 41.
 9. **mod glearn.** This MIDI control sets up a "group learn". However, as the group-learn key is a modifier key that needs to be held, we're not quite sure how this works with MIDI control.
 10. **screen-set play.** This MIDI control sets the playing screen-set, but we're not completely sure

how it works yet.

4. **Extended automation group.** These additional control items were requested by users, to control additional features of the application. Each item in this group consists of one line.

1. **stop/pause/start.** Emulate the Stop, Pause, and Start keys, using Toggle for pause, Off for stop, and On for start.
2. **record.** For recording a live performance by recording the mute/unmute states that the musician played. Not yet functional, thought the feature has been added as of version 0.94.
3. **solo on/off.** Not yet functional.
4. **thru toggle.** Not yet functional.
5. **reserved for expansion** (a few of these are reserved).

For all of these MIDI control lines, the three fields, each between the brackets, on each line, correspond to a *MIDI filter* to toggle, enable, or disable a sequence, or to change a selection, or activate a feature. If the incoming MIDI event value matches a value present in the filter, it will *toggle* (first field), *enable* (second field) or *disable* (third field) the sequence.

We see the following lines in the MIDI Control section, which is broken into groups or subsections marked by comments:

```
[midi-control]
74      # MIDI controls count (84 in the latest Sequencer64)

# pattern group
0  [0 0 0 0 0 0]  [1 0 144 96 0 127]  [1 0 128 96 0 127]
1  [0 0 0 0 0 0]  [1 0 144 97 0 127]  [1 0 128 97 0 127]
2  [0 0 0 0 0 0]  [1 0 144 98 0 127]  [1 0 128 98 0 127]
...      ...      ...      ...
31 [0 0 0 0 0 0]  [1 0 144 127 0 127]  [1 0 128 127 0 127]

# mute in group section:
32 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
33 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
...      ...      ...      ...
63 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]

# bpm up:
64 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
# bpm down:
65 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
# screen set up:
66 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
# screen set down:
67 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
# mod replace:
68 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
# mod snapshot:
69 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
# mod queue:
70 [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
```

```
# mod gmute:
71 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# mod glearn:
72 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# screen set play:
73 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
```

The number (74) is the number of lines in the MIDI Control section. The new extended automation values bring this number up to 84:

```
# Extended MIDI controls:
# start playback (pause, start, stop):
74 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# performance record:
75 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# solo (toggle, on, off):
76 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# MIDI THRU (toggle, on, off):
77 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# bpm page up:
78 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# bpm page down:
79 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# screen set by number:
80 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# MIDI RECORD (toggle, on, off):
81 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# MIDI Quantized RECORD (toggle, on, off)
82 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# reserved for expansion:
83 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
```

Not all of these new values are yet usable. Currently, the "start", "pause", "stop", and "bpm" page controls, and the "performance record", "MIDI THRU", "MIDI RECORD", and "MIDI Quantized RECORD" have been implemented. So let's focus again on one line of data, and describe it in greater detail:

```
74 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
```

The first number represents one of the following entities, depending on its value:

- **0 to 31.** These items represent the **Pattern group** for patterns (sequences) 1 to 32.
- **32 to 63.** These items represent the **Mute-in group** for patterns (sequences) 1 to 32.
- **64 to 73.** These items represent the legacy *Seq24* controls, from **bpm up** to **screen set play**.

- **74 to 83.** These items, if present, represent the new extended controls, to control additional playback features of *Sequencer64*.

Each set of brackets on the line corresponds to a "MIDI filter":

- The leftmost bracket set defines the *toggle* filter.
- The middle bracket set defines the *on* filter.
- The rightmost bracket set defines the *off* filter.

If the incoming MIDI event matches the filter, it will either **[toggle]**, **[on]**, or **[off]** the pattern/sequence, respectively. The layout of each filter inside the brackets is as follows:

[OPR INV STAT D1 D2min D2max]

- **OPR** = on/off
- **INV** = inverse
- **STAT** = MIDI status byte (channel ignored)
- **D1** = data1
- **D2min** = data2 min
- **D2max** = data2 max

If **OPR (on/off)** is set to 1, it will match the incoming MIDI against the **STAT (MIDI status byte)** pattern. and perform the action (on/off/toggle) if the data falls in the range specified. All values are in decimal.

Note: In legacy versions (*Seq24* and early versions of *Sequencer64*), the channel nybble of the MIDI control (and all other incoming MIDI events) were stripped off. This is no longer the case, and thus opens up many more events useful for MIDI control. But do note that events that are actually recorded end up getting the channel number of the pattern into which they are recorded.

The **INV (inverse)** field will make the pattern perform the opposite action (*off* for *on*, *on* for *off*) if the data falls outside the specified range. This is cool because one can map several sequences to a knob or fader.

The **STAT (MIDI status byte)** field is a MIDI status byte number in decimal notation. The channel nybble of this byte is ignored. One can look up the possible status values up in the MIDI messages tables; the relevant data can be found at [15]. As the channel on which the events are sent is ignored, it is sufficient to use the values for channel 1; that is, 0.

The last three fields describe the range of data that will match. The **D1 (data1)** field provides the actual MIDI event message number to detect, in decimal. This item could be a Note On/Off event or a Control/Mode change event, for example.

The **D2min (data2 min)** field is the minimum value of the event for the filter to match. For Note On/Off events, this would be the velocity value, for example.

The **D2max (data2 max)** field is the maximum value of the event for the filter to match.

As a quick example, let us set up a Note On event on channel 2 and key value 48 that will increment *Sequencer64*'s BPM value each time it is pressed. A Note On event is 0x90 hex, or 144 decimal. Channel 2 is 0x1 hex or 1 decimal. Adding the Note On value to the the channel number yields 0x91 hex, or 145 decimal. Then we pick a note value of 48, which is one of the C keys. We don't care about the velocity, so we allow all values (0 to 127). We add the following entry to `~/config/sequencer64/sequencer64.rc`:


```
[midi-control]
. . .
# bpm up:
64 [0 0 0 0 0 0] [1 0 145 48 0 127] [0 0 0 0 0 0]
```

Now, whenever we press key 48 (C), we see that the BPM value in the main patterns panel increments by 1.

9.1.1 Sequencer64 "rc" File / MIDI Control Pattern Group

Complex? Here is an example for the some of the first 32 lines, which comprise the *pattern group*. The following is an example of responding to Note On events for note 0, with any velocity, to turn the pattern on, and Note Off events for note 0, and any velocity, to turn the pattern off.

Toggle	On	Off
1 [0 0 0 0 0 0]	[1 0 144 0 0 127]	[1 0 128 0 0 127]

The first number, 1, indicates the second pattern (pattern numbering starts from 0). The first section, **Toggle**, is off (inactive). All values are 0. There is no setup to use MIDI control to toggle pattern 1 here.

On to the second section, **On**:

- The **On** section starts with **OPR** = 1, so it is on (1 = active).
- The **inverse** value is off (0 = inactive).
- The **MIDI status byte**, 144, which is 0x90 (hex), which is a Note On event on channel 0. However, the channel is ignored.
- The **data1** values sets the actual Note value to 0, meaning the lowest possible MIDI note (pitch) value.
- **data2 min** value sets the minimum value to 0.
- **data2 max** sets the maximum value to 127.

Thus, receiving any Note On velocity for note 0 will turn sequence 1 *on*. This is the second pattern; in the default setup, key **q** would operate on this pattern as well.

On to the **Off** section:

- The **Off** field is on (active).
- The **inverse** value is off (0 = inactive).
- The **MIDI status byte**, 128, which is 0x80 (hex), which 128, which is 0x80 (hex), which is a Note Off event on channel 0.
- The **data1** values sets the actual Note value to 0, meaning the lowest possible MIDI note (pitch) value.
- **data2 min** value sets the minimum value to 0.
- **data2 max** sets the maximum value to 127.

Thus, receiving any Note Off velocity for note 0 will turn sequence 1 *off*.

So, basically, pattern 1 starts when any Note On for MIDI note 0 is received, and it stops when any Note Off for MIDI note 0 is received. One can easily extend this so that Note On/Off values from 0 to 31 control the corresponding pattern slot.

Obviously, one might not want Note On/Off events from any channel to trigger events, so some other event would likely be more useful. (Hmmm, we could add an option to not strip the channel value....)

The following example would map a row of sequences to one knob sending out changes for Control Code 1:

	Toggle	On	Off
0	[0 0 0 0 0 0]	[1 1 176 1 0 15]	[0 0 0 0 0 0]
1	[0 0 0 0 0 0]	[1 1 176 1 16 31]	[0 0 0 0 0 0]
2	[0 0 0 0 0 0]	[1 1 176 1 32 47]	[0 0 0 0 0 0]
3	[0 0 0 0 0 0]	[1 1 176 1 48 63]	[0 0 0 0 0 0]
4	[0 0 0 0 0 0]	[1 1 176 1 64 79]	[0 0 0 0 0 0]
5	[0 0 0 0 0 0]	[1 1 176 1 80 95]	[0 0 0 0 0 0]
6	[0 0 0 0 0 0]	[1 1 176 1 96 111]	[0 0 0 0 0 0]
7	[0 0 0 0 0 0]	[1 1 176 1 112 127]	[0 0 0 0 0 0]

The **on** field is on (active). Inverse is active. The **MIDI status byte**, 176, is 0xB0 (hex), which is a Control Change event (channel ignored). **data1** is 1, which is the controller number for a Modulation Wheel. The **data2** ranges are set so that, as the controller data increases (as the modulation-wheel knob is turned, so to speak), patterns 0 through 7 come on one at a time until all are running.

Here is another example from [14], which shows how to set up the "Sustain" control-change event to queue or un-queue a sequence: The *Akai MPK Mini* has a Sustain button and we can set the Sustain MIDI event (with MIDI status byte 176 [0xB0] to represent a Controller event, and control/mode change number 64 [0x40] to represent the Sustain or Pedal control) up as the queue modifier in the `mod queue` entry:

```
# mod queue
# [ toggle-filter ] [ on-filter ] [ off-filter ]

70 [0 0 0 0 0 0] [1 0 176 64 127 127] [1 0 176 64 0 0]

# OPR INV STA D1 mn mx OPR INV STA D1 mn mx OPR INV STA D1 mn mx
# ^ ^ ^ ^
# | | | |
# | ----Sustain-----|--
# -----Control Change--
```

So when the Sustain button is held down, and one presses one of the pads on the *MPK Mini*, the corresponding sequence gets queued. Here's a little table of the decimal numbers for some commonly-used MIDI controls:

- **128** or **129** for any Note On or Note Off events.

- **160** Polyphonic aftertouch.
- **176** Controller event.
- **192** Program change.
- **208** Aftertouch.
- **224** Pitch wheel.

9.1.2 Sequencer64 "rc" File / MIDI Control Mute In Group

This section controls 32 groups of mutes in the same way as defined for `[midi-control]`, and is in fact placed in the `[midi-control]` section. A group is a set of patterns that can toggle their playing state together. Every group contains all 32 sequences in the active screen set. So, this part of the MIDI Control section is used for muting and unmuting (and toggling) a group of patterns.

What is the different between the **mute-in group** section and the **mute group** section? The former defines the MIDI control values that can affect the muting of a group, while the latter specifies the armed patterns that are part of a group.

9.1.3 Sequencer64 "rc" File / MIDI Control Automation Group

1. **bpm up.** Increases the BPM (speed) of the sequencer based on MIDI input.
2. **bpm down.** Decreases the BPM (speed) of the sequencer based on MIDI input.
3. **screen-set up.** Increases the active screen-set of the sequencer based on MIDI input.
4. **screen-set down.** Decreases the active screen-set of the sequencer based on MIDI input.
5. **mod replace.** This item provides a way to automate replacement.
6. **mod snapshot.** This item provides a way to automate snapshots.
7. **mod queue.** This item provides a way to automate queueing.
8. **mod gmute.** This item provides a way to automate group-muting.
9. **mod glearn.** This item provides a way to automate group-learning.
10. **screen-set play.** This item provides a way to automate screen set play.

9.2 Sequencer64 "rc" File / MIDI Control Extended Automation Section

This section shows how to set up an extended automation control.

Not all of the extended controls work; some that do are the *stop/pause/start* functionality (which requires that the pause functionality be enabled at build time, which is the default). Here, we will set up *Sequencer64* so that the first three MIDI white keys (notes 0, 2, and 4) will become "Stop", "Pause", and "Start" buttons.

The first step, if not already done, is to install the newest version (**0.91.** and above) of *Sequencer64*, run it, and then exit. Verify in the regenerated "rc" file (`~/.config/sequencer64/sequencer64.rc`) that the following lines exist:

```
84      # MIDI controls count (74 or 84)
```

```
# Extended MIDI controls:
```

```
# start playback (pause, start, stop):
```

```
74 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
```

MIDI control 74's toggle/on/off sections will be used to implement the stop/pause/start functionality. Replace the "74" line with the following line:

```
74 [1 0 144 2 0 127] [1 0 144 4 0 127] [1 0 144 0 0 127]
```

This sets up MIDI Note On (144) values 2 (toggle/pause), 4 (on/start), and 0 (off/stop). Any velocity (0 to 127) will work to trigger these actions. Now we are ready to test this feature. One can use a MIDI keyboard to do so, but here we will use the *VMPK* ([34]) virtual MIDI piano keyboard application for this test. Refer to the figure below. In addition, let's set up the standard and the new, extended, BPM (beats/minute) MIDI control values.

```
# bpm up: Note On 9
```

```
64 [0 0 0 0 0 0] [1 0 144 9 0 127] [0 0 0 0 0 0]
```

```
# bpm down: Note On 7
```

```
65 [0 0 0 0 0 0] [1 0 144 7 0 127] [0 0 0 0 0 0]
```

The section above sets up the standard (step-size) BPM controls, which correspond to the fine control possible with the up and down arrows of the BPM spinner in the main window. It sets up Note On 7 to be the BPM-down control, and Note On 9 to be the BPM-up control. These two keys are the dark-cyan keys shown in the figure.

```
# bpm page up: Note On 11
```

```
78 [0 0 0 0 0 0] [1 0 144 11 0 127] [0 0 0 0 0 0]
```

```
# bpm page down: Note On 5
```

```
79 [0 0 0 0 0 0] [1 0 144 05 0 127] [0 0 0 0 0 0]
```

That section uses the extended controls (74 to 83) set up the coarse (page-size) BPM controls, which correspond to the larger jumps possible with the Page Up and Page Down keys when the BPM spinner has focus. It sets up Note On 5 to be the BPM-page-down control, and Note On 11 to be the BPM-page-up control. These two keys are the bright-cyan keys shown in the figure.

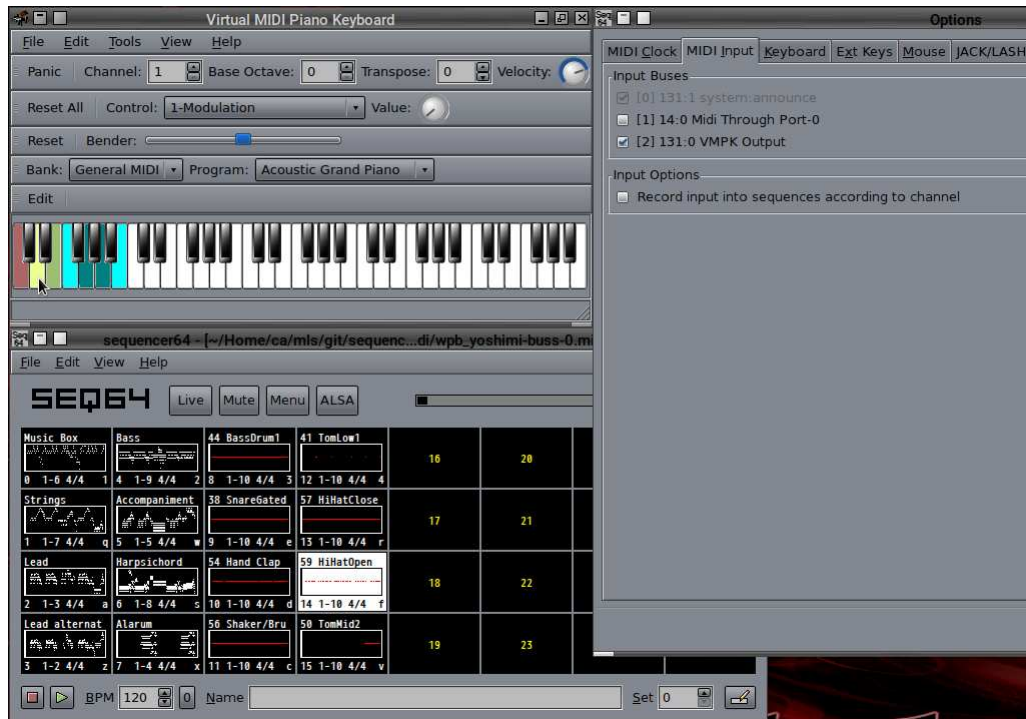


Figure 82: Stop/Pause/Start ALSA Test Setup

One can copy these settings from the sample file `contrib/simple-midi-control-section.rc`, if one wants to try them. It also illustrates some other setups that we use for testing purposes, but are not described here.

Set up **VMPK** to use the lowest octave by setting **Base Octave** to 0. The red, yellow, and green keys shown will be our stop, pause, and start keys. Also set the velocity to a value ranging from 1 to 127. Do not use a zero velocity, as it seems that VMPK will not transmit Note On messages with a zero velocity.

Next, run *Sequencer64*, using the following command line to make sure that it is using ALSA and using automatic mode to connect the ALSA MID ports:

```
$ seq64 -A -a
```

Then open a MIDI file. Next, open the **File / Options / MIDI Input** tab, and make sure that the **VMPK Output** is check-marked as shown in the figure. If desired, also connect up to some kind of synthesizer so that the song can be heard.

Finally, press the third white key (shown as green in the figure) to start playback. The second white key (yellow in the figure) will pause and resume playback. The first white key (red in the figure) will stop (and rewind) playback.

Then play with the BPM MIDI control keys. Note that the size of the BPM step-increment and the BPM page-increment are configurable in the `[user-midi-settings]` section of the "usr" configuration file, using the following values in that section:

```
1      # bpm_precision
```

```

1.0      # bpm_step_increment
10       # bpm_page_increment

```

See section [10.4 "Sequencer64 "usr" File / User MIDI Settings"](#) on page [140](#); it has information about the usage and enabling of these settings.

Obviously, this setup is not useful for performance, but serves as a good example to verify this MIDI control.

One thing we noticed while implementing this functionality is that there is really no need to have two lines for pairs such as BPM up/down and screen-set up/down. Also, is screen-set play now partly redundant? No matter, we will not break the user's existing setup.

9.3 Sequencer64 "rc" File / Mute-Group Section

This section is delimited by the `[mute-group]` construct. It controls 32 groups of mutes in the same way as defined for `[midi-control]`. A group is set of sequences that can toggle their playing state together. Every group contains all 32 sequences in the active screen set.

```

[mute-group]
1024      # group mute value count
0 [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0]
1 [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0]
2 [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0]
...      ...      ...      ...
31 [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0]

```

The initial number, 1024 is probably the total count of 32 x 32 sequences. In this group are the definitions of the state of the 32 sequences in the playing screen set when a group is selected. Each set of brackets defines a group:

```

[state of the first 8 sequences] [second 8] [third 8] [fourth 8]

```

After the list of sequences and their MIDI events, one can set *Sequencer64* to handle MIDI events and change some more settings in `sequencer64.rc`.

What is the different between the **mute-in group** section and the **mute group** section? The former defines the MIDI control values that can affect the muting of a group, while the latter specifies the patterns that are part of a group.

9.4 Sequencer64 "rc" File / MIDI-Clock Section

The MIDI Clock fields will contain the clocking state from the last time *Sequencer64* was run. Turn off the clock with a 0, or on with a 1 (which means to send MIDI Song Position, and MIDI Continue if starting after tick 0), or on with positioning with a 2, which sends MIDI Start and then begins clocking after the position reaches a modulo of the **Clock Start Modulo value**). Luckily, the user-interface

makes it easy to select the desire value, and has tool-tips to instruct the user. This section has 16 entries, one for each MIDI output buss that *Sequencer64* supports.

This configuration item is the same as the **MIDI Clock** tab described in paragraph [2.2.7.1 "Menu / File / Options / MIDI Clock"](#) on page [22](#)

Here is the format:

```
[midi-clock]
16
0 0 # [1] seq24 1
1 0 # [2] seq24 2
2 0 # [3] seq24 3
3 0 # [4] seq24 4
4 0 # [5] seq24 5
5 0 # [6] seq24 6
6 0 # [7] seq24 7
7 0 # [8] seq24 8
8 0 # [9] seq24 9
9 0 # [10] seq24 10
10 0 # [11] seq24 11
11 0 # [12] seq24 12
12 0 # [13] seq24 13
13 0 # [14] seq24 14
14 0 # [15] seq24 15
15 0 # [16] seq24 16
```

That sample would be written one had started up *Sequencer64* in manual-alsa-mode. On our system, where we have Timidity running, and erroneously have also specified 3 MIDI busses that we do not have, in the `sequencer64.usr` file:

```
[midi-clock]
5 # number of MIDI clocks/busses
# Output buss name: [0] 14:0 2x2 A (SuperNova,Q,TX81Z,DrumStation)
0 0 # buss number, clock status
# Output buss name: [1] 128:0 2x2 B (WaveStation,ESI-2000,MV4,ES-1,ER-1)
1 0 # buss number, clock status
# Output buss name: [2] 128:1 PCR-30 (303)
2 0 # buss number, clock status
# Output buss name: [3] 128:2 TiMidity port 2
3 0 # buss number, clock status
# Output buss name: [4] 128:3 TiMidity port 3
4 0 # buss number, clock status
```


9.5 Sequencer64 "rc" File / MIDI-Meta-Events Section

The new MIDI Meta events section is the start of additional options supporting meta events as normal events in *Sequencer64*.

```
[midi-meta-events]
10      # tempo_track_number
```

Normally, as per the MIDI specification, the first track (track 1 in track numbering, or pattern 0 in *Sequencer64* numbering) is *the* official track for certain MIDI meta events, such as Set Tempo and Time Signature. However, to accommodate existing tunes and their set arrangement, we allow the user to go into **File / Options / MIDI Clock** and change the tempo track to another pattern.

Please note that the user can insert Set Tempo events into any track via the pattern editor or the event editor. But, when recording tempo events, they will always be written to the pattern having the tempo-track number.

9.6 Sequencer64 "rc" File / Keyboard Control Section

The keyboard control is a dump of the keys that *Sequencer64* recognises, and each key's corresponding sequence number. Note that the first number corresponds to the number of sequences in the active screen set.

```
[keyboard-control]
32      # number of keys
# Key #  Sequence #  Key name
44  31      # comma
49   0      # 1
50   4      # 2
51   8      # 3
52  12      # 4
53  16      # 5
54  20      # 6
55  24      # 7
56  28      # 8
97   2      # a
98  19      # b
99  11      # c
100 10      # d
101  9      # e
102 14      # f
103 18      # g
104 22      # h
105 29      # i
106 26      # j
107 30      # k
109 27      # m
```

```

110 23      # n
113 1       # q
114 13      # r
115 6       # s
116 17      # t
117 25      # u
118 15      # v
119 5       # w
120 7       # x
121 21      # y
122 3       # z

```

9.7 Sequencer64 "rc" File / Keyboard Group Section

This section is the same as `[keyboard-control]`, but to control groups of patterns, rather than individual patterns, using keystrokes. The keyboard group specifies more automation for the application. The first number specifies the key number, and the second number specifies the Group number.

Additional control items:

1. **# bpm up and down.** Keys to control BPM (beats per minute).
2. **# screen set up and down.** Keys for changing the active screenset.
3. **# group functionality on, off, learn.** Note that the group learn key is a modifier key to be held while pressing a group toggle key.
4. **#replace, queue, snapshot_1, snapshot_2, keep queue.** These are the other modifier keys explained in section 3a.

To see the required key codes when pressed, run `seq24` with the `--show-keys`.

Some keys should not be assigned to control sequences in *Sequencer64* as they are already assigned in the *Sequencer64* menu (with `Ctrl`).

This configuration item is the same as the **Keyboard** tab described in section [2.2.7.3 "Menu / File / Options / Keyboard"](#) on page [27](#).

```

[keyboard-group]
# Key #, group #
32
33 0      # exclam
34 1      # quotedbl
35 2      # numbersign
36 3      # dollar
37 4      # percent
38 5      # ampersand
40 7      # parenleft
47 6      # slash
59 31     # semicolon
65 16     # A
66 28     # B
67 26     # C

```

```

68 18      # D
69 10      # E
70 19      # F
71 20      # G
72 21      # H
73 15      # I
74 22      # J
75 23      # K
77 30      # M
78 29      # N
81 8       # Q
82 11      # R
83 17      # S
84 12      # T
85 14      # U
86 27      # V
87 9       # W
88 25      # X
89 13      # Y
90 24      # Z
39 59      # bpm up, down: apostrophe semicolon
93 91 65360 # screen set up, down, play: bracketright bracketleft Home
236 39 65379 # group on, off, learn: igrave apostrophe Insert
# replace, queue, snapshot_1, snapshot 2, keep queue:
65507 65508 65513 65514 92 # Control_L Control_R Alt_L Alt_R backslash
1      # show_ui_sequence_key and pattern measures (1=true/0=false)
32     # space start sequencer
65307  # Escape stop sequencer
0 #   show sequence numbers (1 = true / 0 = false); ignored in legacy mode

```

Note that most of these group-control keys are shifted versions of the keystrokes that control the individual sequences. Also note the `Control_L` and `Control_R` notations a few lines above. Please avoid using any Control key combinations in the "rc"/Keyboard configuration. Control keys are the province of the user-interface (*Gtk+*) and assigning them can cause surprising behavior! It is also wise to avoid the `Alt` key.

When in group-learn mode, the **Shift** key cannot be hit, so the group-learn mode automatically converts the keys to their shifted versions. This feature known as *shift-lock* or *auto-shift*.

9.8 Sequencer64 "rc" File / JACK Transport

This section holds the settings for both JACK transport and for native JACK MIDI mode.

The JACK Transport options are also command-line options, as indicated in the comments below.

This configuration item is the same as the **Jack Sync** tab described in section [2.2.7.6 "Menu / File / Options / Jack Sync"](#) on page [35](#).

```
[jack-transport]
```

```
# jack_transport - Enable slave sync with JACK Transport.
0

# jack_master - Sequencer64 attempts to serve as JACK Master.
0

# jack_master_cond - Sequencer64 is master if no other master exists.
0

# song_start_mode (applies mainly if JACK is enabled)
# 0 = Playback in live mode. Allows muting and unmuting of loops.
# 1 = Playback uses the song editor's data.
1
```

An additional item, `new`, specifies if native JACK MIDI input/output is to be used.

```
# jack_midi - Enable JACK MIDI, which is a separate option from
# JACK Transport.
1
```

Please note that only *one* of `jack_transport`, `jack_master`, and `jack_master_cond` should be selected (set to 1) at a time. Also note that JACK transport is separately configurable from JACK MIDI, and each uses a different JACK client internally.

9.9 Sequencer64 "rc" File / Other Sections

This configuration item is the same as the **Clock Start Modulo** option described in paragraph [2.2.7.1 "Menu / File / Options / MIDI Clock"](#) on page [22](#).

```
[midi-clock-mod-ticks]
64
```

This configuration item is the same as the **MIDI Input** tab described in paragraph [2.2.7.2 "Menu / File / Options / MIDI Input"](#) on page [25](#). The "1" is undoubtedly a record count, and would equal the number of supported input ports. This "rc" entry here has two variables; the first is the record number or port number, and the second number indicates whether it is disabled (0), or enabled (1).

```
[midi-input]
1 # number of MIDI busses

# The first number is the port number, and the second number
# indicates whether it is disabled (0), or enabled (1).
```

```
# [0] 0:0 seq64 midi in
0 0

# If set to 1, this option allows the master MIDI bus to record
# (filter) incoming MIDI data by channel, allocating each incoming
# MIDI event to the sequence that is set to that channel.
# This is an option adopted from the Seq32 project at GitHub.

0 # flag to record incoming data by channel
```

There is no user-interface item for the following value, but it does correspond to the `--manual-alsa-ports` command-line option.

```
# Set to 1 to have sequencer64 create its own ALSA ports and not
# connect to other clients. Use 1 to expose all 16 MIDI ports to
# JACK (e.g. via a2jmidid). Use 0 to access the ALSA MIDI ports
# already running on one's computer, or to use the autoconnect
# feature (Sequencer64 connects to existing JACK ports on startup.

[manual-alsa-ports]
1
```

The opposite of `--manual-alsa-ports` is `--auto-alsa-ports`. The `auto-alsa-ports` option forces *Sequencer64* to use the system's existing ALSA ports. This is necessary in order to play tunes through software synthesizers that use ALSA MIDI.

Turning on the `manual-alsa-ports` option is necessary if one wants to use the legacy *Sequencer64* (`sequencer64`) with JACK. It is *not* necessary if using the native JACK MIDI version, `seq64`. However, if one needs to avoid the auto-connect feature of `seq64`, then the manual option is necessary.

It will create ports as per the settings in the "user" configuration file's `user-midi-bus-definitions` and `user-midi-bus-N` sections. These definitions can be used by JACK for connection, and these definitions can be used to specifically rename the ports that exist in the system. However, this option is misleading if one wants to have access to the actual ALSA ports that exist on the system. The next option gets around that issue.

```
# Set to 1 to have sequencer64 ignore any system port names
# declared in the 'user' configuration file. Use this option if
# you want to be able to see the port names as detected by ALSA.

[reveal-alsa-ports]
1 # flag for reveal ALSA ports
```

Turning on the `reveal-alsa-ports` option is necessary if one wants to see the actual ALSA port names defined by the system. It will ignore the settings in the "user" configuration file's `user-midi-bus-definitions`

and `user-midi-bus-N` sections. If this option is turned on, the definitions in the "user" configuration file are *not* read from that file.

This configuration item is the same as the **Mouse** tab described in paragraph 2.2.7.5 "Menu / File / Options / Mouse" on page 33.

```
[interaction-method]

# 0 - 'seq24' (original seq24 method)
# 1 - 'fruity' (similar to a certain fruity sequencer we like)

0    # interaction_method
```

New: There is now an option to use the Mod4 (Super, or Windows) key in the Pattern Editor to lock the editing of a note. When this mode is enabled, and Mod4 is pressed while the mouse right-button is released, the editing pencil icon remains, and notes can be added. This feature is useful for crippled trackpads and trackpad drivers that cannot provide two simultaneous button presses.

```
# Set to 1 to allow seq24 to stay in note-adding mode when
# the right-click is released while holding the Mod4 (Super or
# Windows) key.

1    # allow_mod4_mode
```

New: This option comes from the *seq32* project. It allows for pattern-splitting in the Song editor at snap points, rather than just at the middle of the pattern.

```
# Set to 1 to allow Sequencer64 to split performance editor
# triggers at the closest snap position, instead of splitting the
# trigger exactly in its middle. Remember that the split is
# activated by a middle click.

0    # allow_snap_split
```

New: This option allows one to enable/disable the ability to double-click in a pattern slot in the main window to bring it up for editing. This can interfere with a live performance where muting/unmuting come fast enough to be seen as a double-click.

```
# Set to 1 to allow a double-click on a slot to bring it up in
# the pattern editor. This is the default. Set it to 0 if
# it interferes with muting/unmuting a pattern.

1    # allow_click_edit
```

The following configuration item is the same as the `--lash` or `--no-lash` options described in section 11 "[Sequencer64 Man Page](#)" on page 145. If set to 0, LASH session support is disabled. If set to 1, LASH session support is enabled. However, if LASH support is not built into the application, neither option has any effect – there is no LASH support. To determine if LASH support is built in, run `sequencer64` from the command line with the `--version` option, and see if LASH is mentioned.

```
[lash-session]
# Set the following value to 0 to disable LASH session management.
# Set the following value to 1 to enable LASH session management.
# This value will have no effect is LASH support is not built into
# the application. Use the --help option to see if LASH is part of
# the options list.
1      # LASH session management support flag
```

This new item determines if the "rc" configuration file is saved upon exit of *Sequencer64*. The legacy behavior is to save it, which can sometimes be inconvenient when one is just trying out some command-line options.

```
[auto-option-save]
# Set the following value to 0 to disable the automatic saving of the
# current configuration to the 'rc' file. Set it to 1 to
# follow legacy seq24 behavior of saving the configuration at exit.
# Note that, if auto-save is set, many of the command-line settings,
# such as the JACK/ALSA settings, are then saved to the configuration,
# which can confuse one at first. Also note that one currently needs
# this option set to 1 to save the configuration, as there is not a
# user-interface control for it at present.
0      # auto-save-options-on-exit support flag
```

The following item refers to the last directory in which one opened or saved a MIDI file.

```
[last-used-dir]

# Last used directory.

/home/ahlstrom/Home/ca/mls/git/sequencer64/contrib/midi/
```

The following item preserves a list of the last few MIDI files loaded.

```
[recent-files]

# Holds a list of the last few recently-loaded MIDI files.
```



```
/home/ahlstrom/Home/ca/mls/git/sequencer64-alternate/contrib/midi/2Bars.midi
contrib/midi/b4uacuse-seq24.midi
contrib/midi/Bars.midi
contrib/midi/b4uacuse-GM-format.midi
```

10 Sequencer64 "usr" Configuration File

There are two *Sequencer64* configuration files: `sequencer64.rc` and `sequencer64 usr`. See section 9 "[Sequencer64 "rc" Configuration File](#)" on page 109; it describes the "rc" file. They are a bit different in how they are handled.

The *Sequencer64* "usr" (or "user") configuration file provides a way to give more informative names to the MIDI busses, MIDI channels, and MIDI controllers of a given system setup. This configuration will override the default values of some drop-down lists and menu items, and make them reflect your names for them. In *Sequencer64* it, also includes some items that affect the user-interface's look, and other new configuration items.

Unlike the "rc" file, the "user" file is *not* written every time *Sequencer64* exits. If the "user" file does not exist, one is created, but it is normally not overwritten thereafter. To cause it to be overwritten at exit, run *Sequencer64* with the `-u` or `--user-save` option:

```
$ seq64 --user-save
```

This option is recommended when one installs a new version of *Sequencer64*, which might add new options to the "user" file. See section 11 "[Sequencer64 Man Page](#)" on page 145; it discusses more options involving the "user" file.

Another difference between the "rc" file and the "user" file is that the "user" file currently has no graphical user-interface dialog to configure the "user" settings. One has to edit the file manually.

The original purpose for the "user" file was to create familiar names for the system MIDI devices. By default, the list of MIDI devices that *Sequencer64* shows depends on one's system setup and whether the `manual-alsa-port` option is specified or not. Here's our system, which has Timidity installed and running as a service, and the `[manual-alsa-port]` option turned off, shown in a composite view with all menus one can look at for MIDI settings:

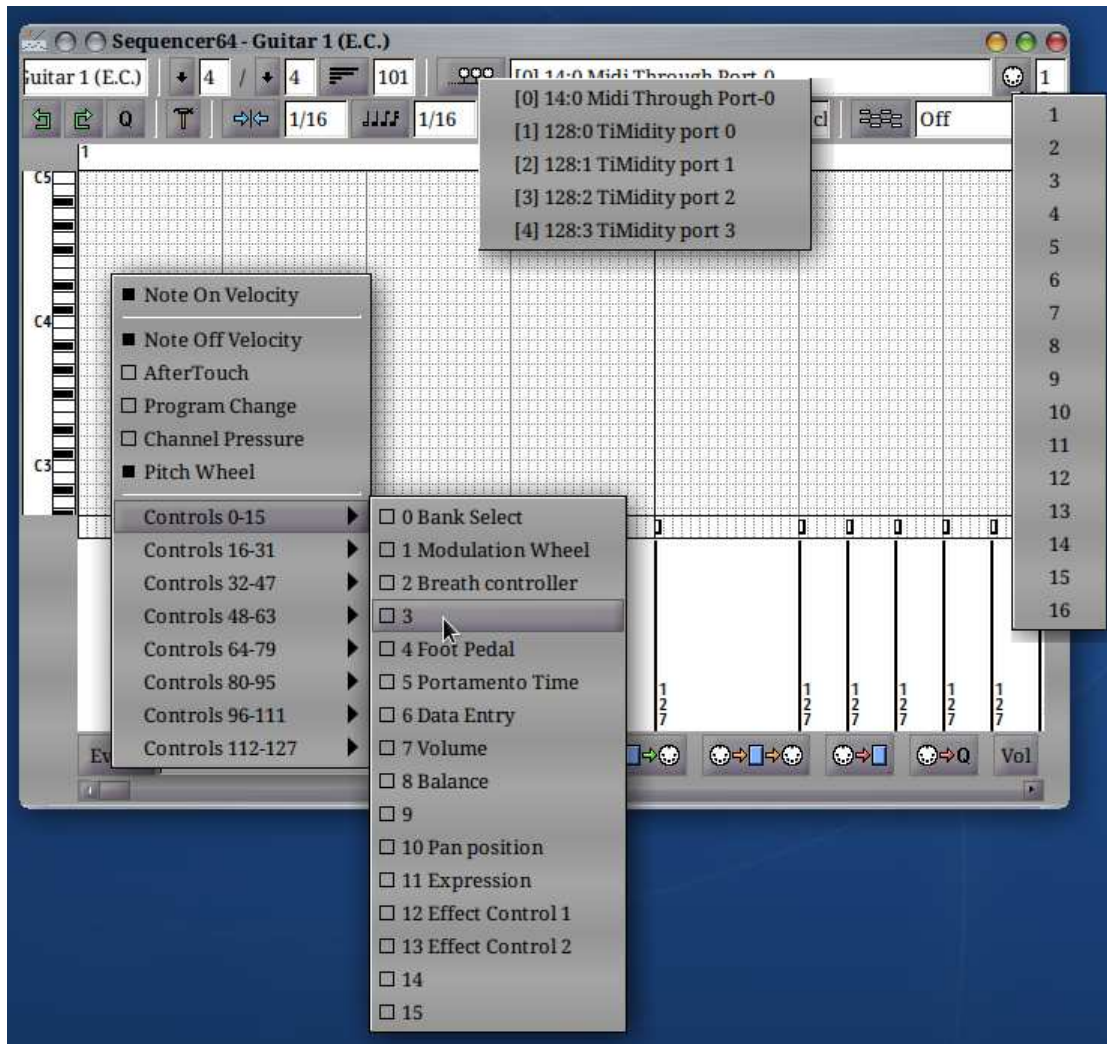


Figure 83: Sequencer64 Composite View of Native Devices

At the top center, the dropdown menu contains the 5 MIDI busses/ports supported by this computer. At right, the MIDI channel shows the channels numbers that can be picked for buss 0. At bottom left, we see the default controller values that *Sequencer64* includes. We have no idea if these correspond to any controllers that the selected MIDI buss supports. We can use this dropdown to see if any such controller events are in the loaded MIDI file, of course; a solid black square indicates that such an event was found in the pattern.

Now let's assume we have 3 MIDI "buss" devices hooked to our system: two Model "2x2" MIDI port devices, and an old PCR-30 MIDI controller keyboard. Let's number them:

1. Model 2x2 A
2. Model 2x2 B
3. PCR-30

Then assume that we have nine different MIDI instruments in our kit. Let's number them, too:

1. Waldorf Micro Q

2. SuperNova
3. DrumStation
4. TX81Z
5. WaveStation
6. ESI-2000
7. ES-1
8. ER-1
9. TB-303

The Waldorf Micro Q, the SuperNova, and the DrumStation all have a large number of special MIDI controller values for affecting the sound they produce. The DrumStation accepts MIDI controllers that change various features of the sound of each type of drum it supports.

The buss devices can be configured to route certain MIDI channels to certain MIDI devices. Assume we have them set up this way:

1. Model 2x2 A
 - SuperNova: channels 1 to 8
 - TX81Z: channels 9 to 11
 - Waldorf Micro Q: channels 12 to 15
 - DrumStation: channel 16
2. Model 2x2 B
 - WaveStation: channels 1 to 4
 - ESI-2000: channels 5 to 14
 - ES-1: channel 15
 - ER-1: channel 16
3. PCR-30
 - TB-303: channel 1

How can we get *Sequencer64* to show these items with the proper names associated with each device, channel, and controller value? We use the oddly-named **"user" configuration file**.

The *Seq24* configuration file was called `.seq24usr`, and it was stored in the user's `$HOME` directory. *Sequencer64* uses a new file-name to take its place, with a fall-back to the original file-name if the new file does not exist, or if *Sequencer64* is running in legacy mode. After one runs *Sequencer64* for the first time (or after deleting the configuration files), it will generate a `sequencer64 usr` file in your home directory:

```
/home/ahlstrom/.config/sequencer64/sequencer64.usr
```

It allows you to give an alias to each MIDI bus, MIDI channel, and MIDI control codes, per channel. The file-name is a bit misleading... do not confuse this file with the `sequencer64.rc` file.

The process for setting up the user file is to:

1. Define one or more MIDI busses, the name of each, and what instruments are on which channels. Each buss is configured in a section of the form `"[user-midi-bus-X]"`, where "X" ranges from 0 on up. Each buss then defines up to 16 channel entries. Each entry includes the channel number and the number of a section in the user-instrument section described next.

2. Define all of the instruments and their controller names, if they have them. Each instrument is configured in a section of the form "[user-instrument-X]", where "X" ranges from 0 on up.

Let's walk through the structure of this setup, since it is a little bit tricky. Here is a diagram of the relationships between the buss definitions and instrument definitions:

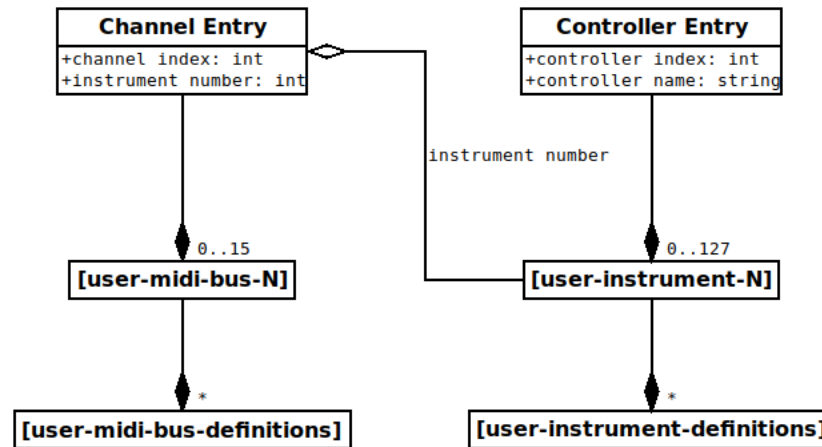


Figure 84: Busses and Instruments in the "usr" File

The first section in the "usr" file (after [comments]) is [user-midi-bus-definitions]. The solid diamond link, with the "*" marker, indicates that this section contains an arbitrary number ("*") of [user-midi-bus-N] sections, where "N" ranges from 0 on upward. These correspond to the MIDI busses expected to be in the system, ignoring the "announce" buss.

Each of the busses contains 16 (0 to 15) channel entries. These channels are referred to as "instrument numbers", and are represented as and linked to "instruments" in the [user-instrument-definitions] section. Each instrument contains up to 128 controller values; these controller values are available in the **Event** button in the Pattern Editor, and their names are shown.

So, each instrument is setup as a "channel" in a particular "buss". In the Pattern Editor, when a particular buss and channel is selected, the **Event** menu entries should match the controller entries set up in the "usr" file.

Taking our list of devices and channels we created above, which can be seen in the *Sequencer64* sample file `contrib/configs/sequencer64 usr.example`, and deducting 1 from each device number and channel number (so that numbering starts from 0), and consulting the device manuals to determine the controller values it supports, we can assemble a "user" configuration file that makes the setup visible in *Sequencer64*.

Peruse the next couple of sections to understand a bit about the format of this file. Look at the example files in the `contrib/configs` directory as well, to see the whole thing put together. Once satisfied, go to section [10.6 "Sequencer64 "usr" File / Device and Control Names"](#) on page 143, and see what it all looks like.

10.1 Sequencer64 "usr" File / MIDI Bus Definitions

This section begins with an "INI" group marker [user-midi-bus-definitions]. It defines the number of user busses that will be configured in this file.

```
[user-midi-bus-definitions]
3      # number of user-defined MIDI busses
```

This means that the `sequencer64 usr` file will have three MIDI buss sections: `[user-midi-bus-0]`, `[user-midi-bus-1]`, and `[user-midi-bus-2]`. Here's is an annotated example of one such section:

```
[user-midi-bus-0]
2x2 A (SuperNova,Q,TX81Z,DrumStation)      # name of the device
16                                           # number of channels

# NOTE: Channels are 0-15, not 1-16.  Instruments set to -1 = GM

0 1                                           # channel and instrument
1 1      # Instrument #1 of the [user-instrument-definitions] section
2 1
. . .
7 1
8 3      # Instrument #3 of the [user-instrument-definitions] section
9 3
10 3
11 0     # Instrument #0 of the [user-instrument-definitions] section
12 0     # This is the Waldorf Micro Q device defined below
13 0
14 0
15 2     # Instrument #2 of the [user-instrument-definitions] section
```

Here's an example of one that needs only one override:

```
[user-midi-bus-2]                          # Instrument 2, see ch. 15 above
PCR-30 (303)
1                                           # number of channels
0 8                                           # channel and instrument
# The rest default to -1... General MIDI
```

Note that these user-instrument entries can be quickly disabled by changing the count values to 0.

Please note that, as of version 0.9.10.1, these instrument-definition sections are read from the "user" configuration file only if the `--reveal-alsa-ports` option is *off* ("0"); this command-line option can also be specified in the `[reveal-alsa-ports]` section of the "rc" file, see section 9.9 "Sequencer64 "rc" File / Other Sections" on page 124, where this section is discussed. Otherwise, the actual port names reported by ALSA are shown. The `user-midi-bus-definitions` and `user-midi-bus-N` sections can be misleading if one wants to have access to the actual ALSA ports that exist on the system. Therefore, if the `--reveal-alsa-ports` option is turned on, then the definitions in the "user" configuration file are *not* read from that file. The following figures show the results of various settings with an active "user" file. They have been clipped to save space.

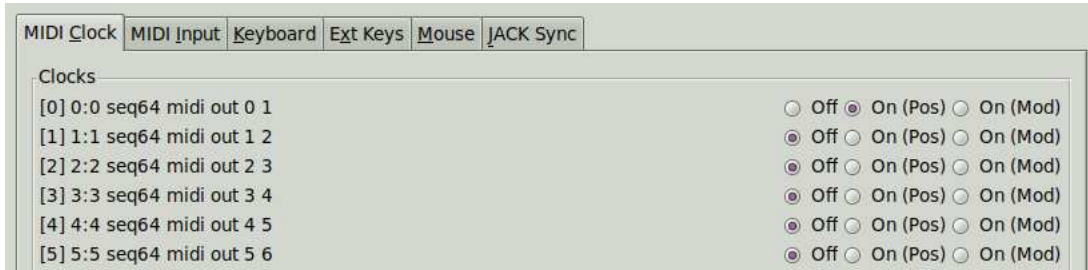


Figure 85: Clocks View, -m (-manual-alsa-ports)

Above, the virtual (manual) output ports are shown just as created by *Sequencer64*. The `--reveal-alsa-ports` option is *off* here.

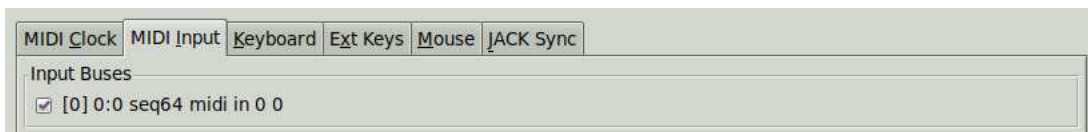


Figure 86: Inputs View with -m (-manual-alsa-ports) Option

Above, the single virtual (manual) input port is shown just as created by *Sequencer64*. Again, the `--reveal-alsa-ports` option is *off* here.

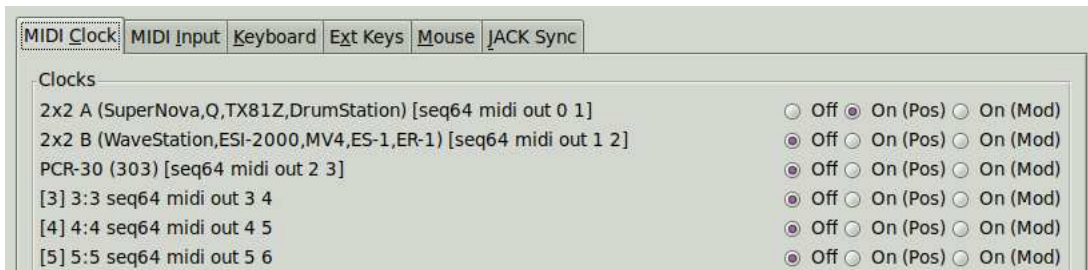


Figure 87: Clocks View, -m (-manual-alsa-ports) and -R (-hide-alsa-ports)

Above, by adding the "hide" ports option, the system port labels are replaced by the labels from the "usr" file.

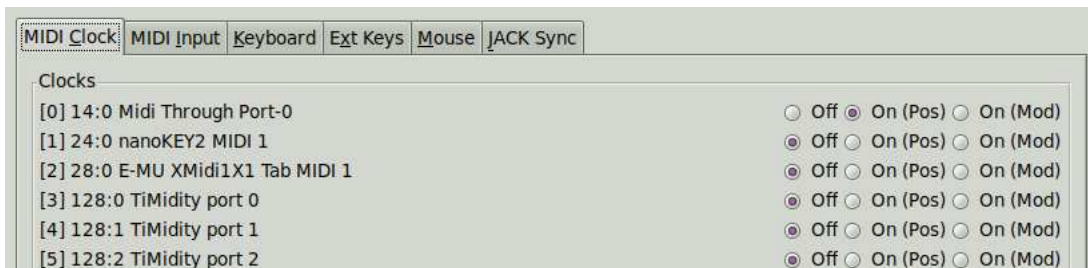


Figure 88: Clocks View, -r (-reveal-alsa-ports)

Above, the "reveal" ports option overrides the device names given in the "usr" file, so that the native system names of the output ports are shown.

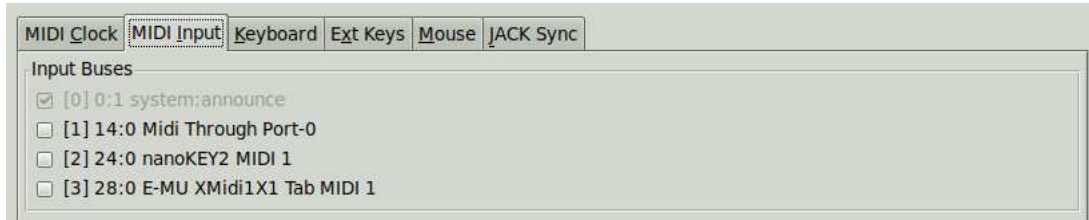


Figure 89: Inputs View with -r (--reveal-alsa-ports) Option

Above, the "reveal" ports option overrides the device names given in the "usr" file, so that the native system names of the input ports are shown.

However, note that *Sequencer64* no longer overrides the names of the input ports via the "usr" file. This is done to save some trouble in displaying the input port names, which are shown only in this dialog. We may consider offering a separate override section for the input ports in the future.

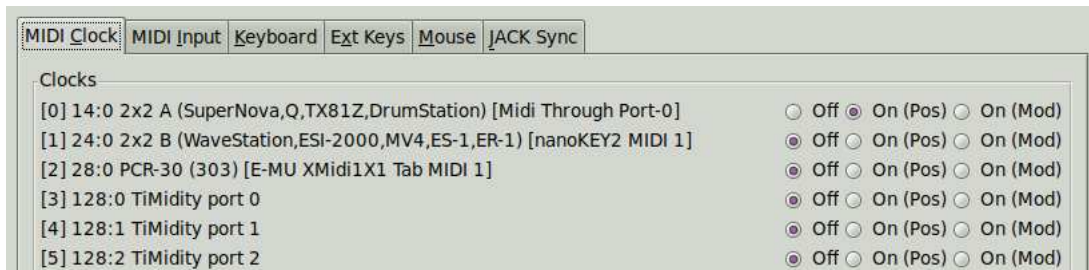


Figure 90: Clocks View with -R (--hide-alsa-ports) Option

The figure above shows how hiding the system port names shows the names defined in the "usr" file. But notice that the actual port names are shown in square brackets, for reference.

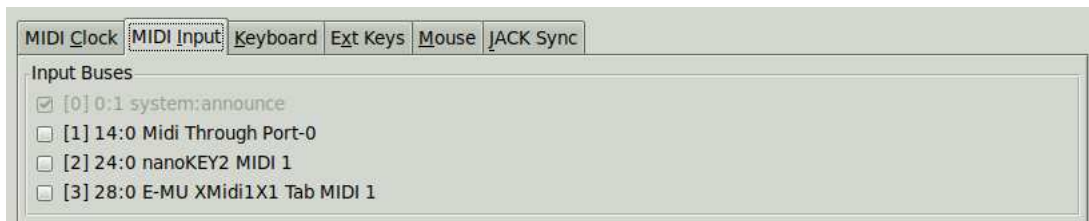


Figure 91: Inputs View with -R (--hide-alsa-ports) Option

Although the "hide" ports option is specified above, this view is currently also the normal view of the input ports, even with device names defined in the "usr" file. At this time, there's no real need to show the user-instrument names on the input port. If there turns out to be such a need, the definitions would likely need to be different from the definitions for the output ports. Another complexity is the possible existence, under ALSA, of the `system:announce` port.

10.2 Sequencer64 "usr" File / MIDI Instrument Definitions

This section begins with an "INI" group marker `[user-instrument-definitions]`. It defines the number of user instruments that will be configured in this file. This section defines characteristics, such as the

meanings of MIDI controller values, of the instruments themselves, not the MIDI busses to which they attached.

```
[user-instrument-definitions]
9      # number of user instrument
```

So this "usr" file will define 9 instruments. We provide only one section as an example. Note that items without text default to the values prescribed by the General MIDI (GM) specification.

```
[user-instrument-0]
Waldorf Micro Q           # name of instrument
128                       # number of MIDI controllers
0                          # first controller value, unnamed
1 Modulation Wheel
2 Breath Control
3
4 Foot Control
. . .
119
120 All Sound Off (0)
121 Reset All Controllers (0)
122 Local Control (0-127) (Off,On)
123 All Notes Off (0)
124                       # defaults to GM
125 Unsupported
126 Unsupported
127                       # defaults to GM
```

Note the unnamed control numbers above. An unnamed control number might be an unsupported control number. It is termed to be "inactive". In this case, the event menu of the pattern editor will show the default name of this controller. Again, though, the function denoted by this name might not be supported by the device. In that case, it might be better to call it "Unsupported". See the examples above. Here is an instrument that has synthesis parameters that can be controlled:

```
[user-instrument-1]
SuperNova
128
0 Bank Select MSB
1 Modulation Wheel
2 Breath Controller
3 Arp Pattern Select
. . .
121 Reset Controllers
122 Local Control [*]
123 All Notes Off
124 All Notes Off
```



```
125 All Notes Off
126 All Notes Off
127 All Notes Off
```

Here is an instrument that perhaps has no controllers, or perhaps is simply not configured by the musician yet:

```
[user-instrument-4]
WaveStation
0
```

The sample file `contrib/configs/sequencer64-timidity-yoshimi.usr.example` contains examples of some other kinds of instruments. It is a minimal resource, useful to study when creating one's own settings.

10.3 Sequencer64 "usr" File / User Interface Settings

This section, new to *Sequencer64*, begins with an "INT" group marker `[user-interface-settings]`.

It provides for a feature we will hopefully be able to complete some day: the complete specification of the appearance of the user interface. There is plenty of room to change the appearance of *Sequencer64* already! Please try the settings and see what you like.

```
# ===== Sequencer64-Specific Variables Section =====

[user-interface-settings]

# These settings specify the soon-to-be-modifiable sizes of
# the Sequencer64 user-interface elements.

# Specifies the style of the main-window grid of patterns.
# 0 = normal style, matches the GTK theme, has brackets.
# 1 = white grid boxes that have brackets.
# 2 = black grid boxes.
2      # grid_style

# Specifies box style box around a main-window grid of patterns.
# 0 = Draw a whole box around the pattern slot.
# 1 = Draw brackets on the sides of the pattern slot.
# 2 and up = make the brackets thicker and thicker.
# -1 = same as 0, draw a box one-pixel thick.
# -2 and lower = draw a box, thicker and thicker.
2      # grid_brackets
```

```
# Specifies the number of rows in the main window.
# Values of 4 (the default) through 8 (the best alternative value)
# are allowed.
4      # mainwnd_rows

# Specifies the number of columns in the main window.
# At present, only values from 8 (the default) to 12 are supported.
8      # mainwnd_cols

# Specifies the maximum number of sets, which defaults to 1024.
# It is currently never necessary to change this value.
32     # max_sets

# Specifies the border width in the main window.
0      # mainwid_border

# Specifies the border spacing in the main window.
2      # mainwid_spacing

# Specifies some quantity, it is not known what it means.
0      # control_height

# Specifies the initial zoom for the piano rolls.  Ranges from 1.
# to 32, and defaults to 2 unless changed here.
2      # zoom

# Specifies if the key, scale, and background sequence are to be
# applied to all sequences, or to individual sequences.  The
# behavior of Seq24 was to apply them to all sequences.  But
# Sequencer64 takes it further by applying it immediately, and
# by saving to the end of the MIDI file.  Note that these three
# values are stored in the MIDI file, not this configuration file.
# Also note that reading MIDI files not created with this feature
# will pick up this feature if active, and the file gets saved.
# It is contagious.
```

```
#
# 0 = Allow each sequence to have its own key/scale/background.
#   Settings are saved with each sequence.
# 1 = Apply these settings globally (similar to seq24).
#   Settings are saved in the global final section of the file.
1   # global_seq_feature

# Specifies if the old, console-style font, or the new anti-
# aliased font, is to be used as the font throughout the GUI.
# In legacy mode, the old font is the default.
#
# 0 = Use the old-style font.
# 1 = Use the new-style font.
1   # use_new_font

# Specifies if the user-interface will support two song editor
# windows being shown at the same time. This makes it easier to
# edit songs with a large number of sequences.
#
# 0 = Allow only one song editor (performance editor).
# 1 = Allow two song editors.
1   # allow_two_perfedits

# Specifies the number of 4-measure blocks for horizontal page
# scrolling in the song editor. The old default, 1, is a bit
# small. The new default is 4. The legal range is 1 to 6, where
# 6 is the width of the whole performance piano roll view.
4   # perf_h_page_increment

# Specifies the number of 1-track blocks for vertical page
# scrolling in the song editor. The old default, 1, is a bit
# small. The new default is 8. The legal range is 1 to 18, where
# 18 is about the height of the whole performance piano roll view.
8   # perf_v_page_increment

# Specifies if the progress bar is colored black, or a different
# color. The following integer color values are supported:
#
# 0 = black
```

```
# 1 = dark red
# 2 = dark green
# 3 = dark orange
# 4 = dark blue
# 5 = dark magenta
# 6 = dark cyan
6      # progress_bar_colored

# Specifies if the progress bar is thicker. The default is 1
# pixel. The 'thick' value is 2 pixels. (More than that is not
# useful. Set this value to 1 to enable the feature, 0 to disable
# it.
1      # progress_bar_thick

# Specifies using an alternate (darker) color palette. The
# default is the normal palette. Not all items in the user
# interface are altered by this setting, and it's not perfect.
# Set this value to 1 to enable the feature, 0 to disable it.
0      # inverse_colors

# Specifies the window redraw rate for all windows that support
# that concept. The default is 40 ms. Some windows used 25 ms.
40     # window_redraw_rate

# Specifies using icons for some of the user-interface buttons
# instead of text buttons. This is purely a preference setting.
# If 0, text is used in some buttons (the main window buttons).
# Otherwise, icons are used. One will have to experiment :-).
0      # use_more_icons (currently affects only main window)

# Specifies the number of set window ('wid') rows to show.
# The long-standing default is 1, but 2 or 3 may also be set.
# Corresponds to 'r' in the '-o wid=rx,c,f' option.
2      # block_rows (number of rows of set blocks/wids)

# Specifies the number of set window ('wid') columns to show.
# The long-standing default is 1, but 2 may also be set.
```

```

# Corresponds to 'c' in the '-o wid=rx,c,f' option.
2      # block_columns (number of columns of set blocks/wids)

# Specifies if the multiple set windows are 'in sync' or can
# be set to arbitrary set numbers independently.
# The default is false (0), means that there is a single set
# spinner, which controls the set number of the upper-left 'wid',
# and the rest of the set numbers follow sequentially. If true
# (1), then each 'wid' can be set to any set-number.
# Corresponds to the 'f' (true, false, or 'indep') in the
# '-o wid=rx,c,f' option. Here, 1 is the same as 'indep' or false,
# and 0 is the same as f = true. Backwards, so be careful.
1      # block_independent (separate set spinner for blocks/wids)

```

Note that the window-redraw rate option is meant more for experimentation than anything else. It probably doesn't affect CPU usage much, but might provide a smoother-running cursor on some systems.

10.4 Sequencer64 "usr" File / User MIDI Settings

This section begins with an "INI" group marker [user-midi-settings]. It supports files with different PPQN, and allows one to specify the global defaults for tempo, beats per measure, and so on.

```

[user-midi-settings]

# These settings specify MIDI-specific value that might be
# better off as variables, rather than constants.
# Specifies parts-per-quarter note to use, if the MIDI file.
# does not override it. Default is 192, but we'd like to go
# higher than that. BEWARE: STILL GETTING IT TO WORK!
192      # midi_ppqn

# Specifies the default beats per measure, or beats per bar.
# The default value is 4.
4        # midi_beats_per_measure/bar

# Specifies the default beats per minute. The default value
# is 120, and the legal range is 1 to 600.
120      # midi_beats_per_minute

```

```
# Specifies the default beat width. The default value is 4.
4      # midi_beat_width

# Specifies the buss-number override. The default value is -1,
# which means that there is no buss override. If a value
# from 0 to 31 is given, then that buss value overrides all
# buss values specified in all sequences/patterns.
# Change this value from -1 only if you want to use a single
# output buss, either for testing or convenience. And don't
# save the MIDI afterwards, unless you really want to change
# all of its buss values.
-1     # midi_buss_override
```

For the new 0.90 series, additional values for the [user-midi-settings] section have been added:

```
# Specifies the default velocity override when adding notes in the
# sequence/pattern editor. This value is obtained via the 'Vol'
# button, and ranges from 0 (not recommended :-) to 127. If the
# value is -1, then the incoming note velocity is preserved.
80     # velocity_override (-1 = 'Free')

# Specifies the precision of the beats-per-minutes spinner and
# MIDI control over the BPM value. The default is 0, which means
# the BPM is an integer. Other values are 1 and 2 decimal digits
# of precision.
1      # bpm_precision

# Specifies the step increment of the beats/minute spinner and
# MIDI control over the BPM value. The default is 1. For a
# precision of 1 decimal point, 0.1 is a good value. For a
# precision of 2 decimal points, 0.01 is a good value, but one
# might want somethings a little faster, like 0.05.
0.1    # bpm_step_increment

# Specifies the page increment of the beats/minute field. It is
# used when the Page-Up/Page-Down keys are pressed while the BPM
# field has the keyboard focus. The default value is 10.
5.0    # bpm_page_increment
```

```
# Specifies the minimum value of beats/minute in tempo graphing.
# By default, the tempo graph ranges from 0.0 to 127.0.
# This value can be increased to give a magnified view of tempo.
0      # midi_bpm_minimum

# Specifies the maximum value of beats/minute in tempo graphing.
# By default, the tempo graph ranges from 0.0 to 127.0.
# This value can be increased to give a magnified view of tempo.
360    # midi_bpm_maximum
```

The `velocity-override` option fixes a long standing (from *Seq24*) bug where the actual incoming note velocity was always replaced by a hard-wired value.

The `bpm-precision`, `bpm-step-increment`, and `bpm-page-increment` values allow more precise control over tempo, which makes it easier to match the tempo of external music sources. Note that the step-increment is used by the up/down arrow buttons, the up/down arrow keys, and the MIDI BPM control values. The page-increment is used if the BPM field has focus and the Page-Up/Page-Down keys are pressed, and new MIDI control values have been added to support coarse MIDI control of tempo.

The `midi-bpm-minimum` and `midi-bpm-maximum` settings are used in scaling the display of Tempo events. By adjusting these values, one can more easily see the variations in tempo. In a main window pattern slot, or in the song editor tempo track, this range is scaled to the full range of note values, 0 to 127. Generally, one wants to select a range that keeps the main tempo line at the middle height of the pattern display.

To obtain these new settings, remember to backup the existing *sequencer64 usr*, then run *Sequencer64* with the `--user-save` option, and then do a "diff" on the new file and the original to merge any old value that need to be preserved. Then make any further tweaks to the new values.

10.5 Sequencer64 "usr" File / User Options

This section begins with an "INI" group marker `[user-options]`. It provides for additional options keyed by the `-o/--option` options. This group of options serves to expand the options that are available, since *Sequencer64* is running out of single-character options. This group of options are shown below.

```
# The daemonize option is used in seq64cli to indicate that the
# application should be gracefully run as a service.
0      # option_daemonize
```

If this option is not used when running `seq64cli`, then the application stays in the console window and dumps informational output to it. If this option is in force, then the only way to affect `seq64cli` is to send a signal (e.g. `SIGKILL`) to it, or use MIDI control.

```
# This value specifies an optional log-file that replaces output
# to standard output and standard error. To indicate no log-file,
```

```
# the string "" is used.  
"seq64.log"
```

This log-file is written to the same directory as the "rc" and "usr" files. If this file-name is empty, then a valid file-name must be specified in the "--option log=filename.log" option. Note that this file is always written to the *Sequencer64* configuration directory.

10.6 Sequencer64 "usr" File / Device and Control Names

Okay, now we have this file copied to our home directory:

```
/home/ahlstrom/.config/sequencer64/sequencer64 usr
```

If we'd already run *Sequencer64* at least once, we'd have overwritten the skeleton sample file that *Sequencer64* writes by default. We now have a full-fledged "user" file.

However, because we don't actually have all that equipment (we got the example from the Web, for cryin' out loud), let's see what we end up with when we run *Sequencer64* this time and show the pattern editor settings:

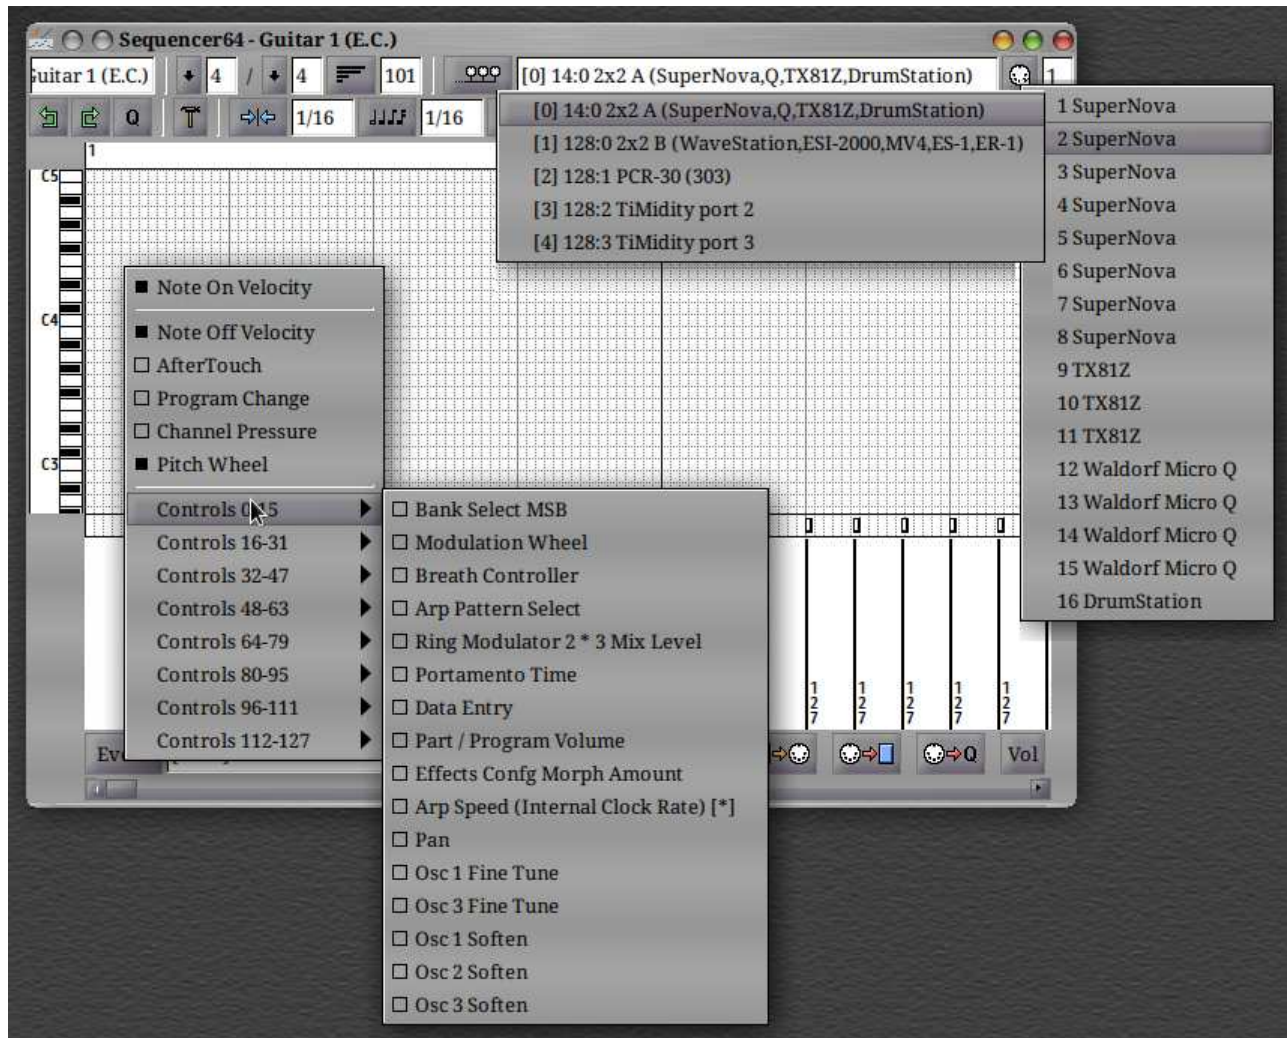


Figure 92: Sequencer64 Composite View of Non-Native Devices

Compare that diagram to figure 83 "Sequencer64 Composite View of Native Devices" on page 129. If the original figure, we saw the 5 native busses (ports) on our system, their bare-bones channel numbers, and the default controller values. In this new figure, we see the three buss devices (ports), plus the two Timidity ports. If we stopped the Timidity service, these would go away.

Look at the selected buss, "[0]". It's 16 channels are now associated with the devices to which the channels have been assigned.

Thus, when we have a new pattern we've created in *Sequencer64*, can assign it to exactly the buss and device we want.

If we don't have port-mappers installed, and thus have only one playback device plugged into the buss, we can still create a setup that shows the device and a specific program setup. Doing so would be tedious, but perhaps there's some automated way to do it?

Lastly, note the following figure.

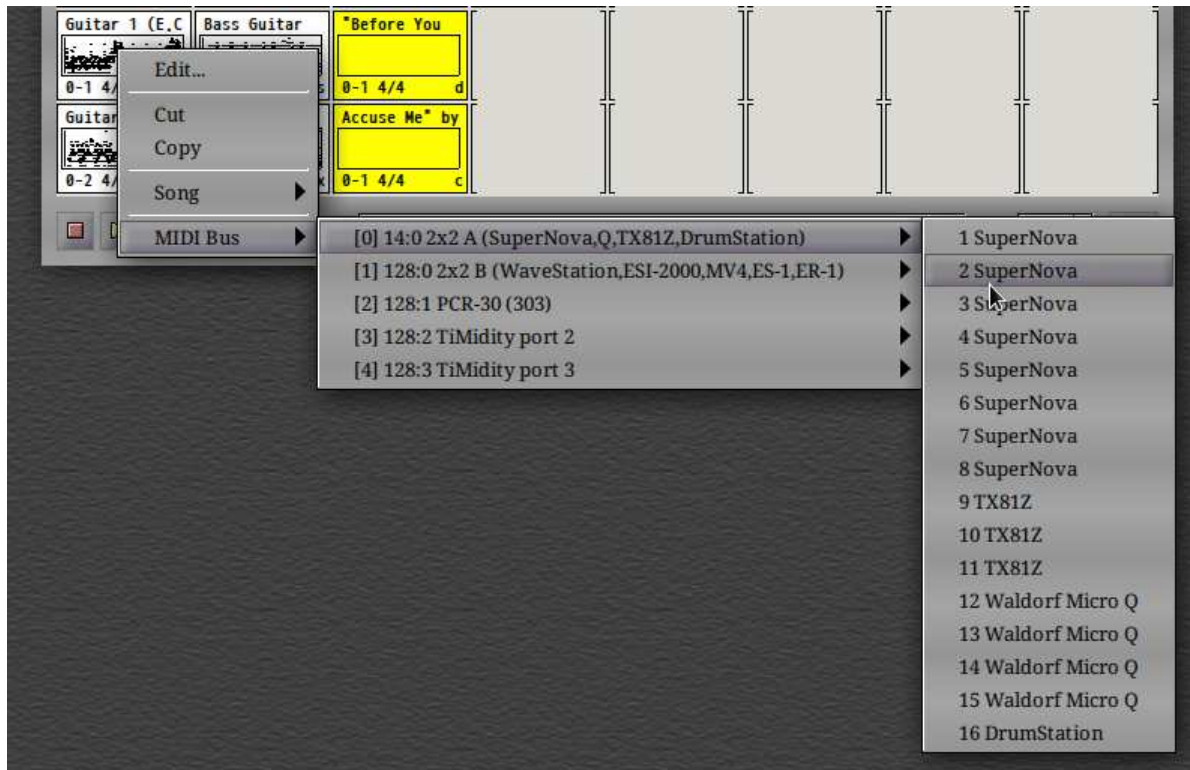


Figure 93: The MIDI Bus Menu for a Specific Pattern

This figure shows that we can also select the desired port and channel directly from the main window. There's more to the "user" configuration file than we've exposed here.

11 Sequencer64 Man Page

This section presents the contents of the *Sequencer64* man page, but not exactly in *man* format. Also, an item or two are shown that somehow didn't make it into the man page, and minor corrections and formatting tweaks were made. For example, we replaced the underscore with the hyphen in the names of some options. The legacy Seq24 options, which use underscores or are missing the option hyphen, are still unofficially supported.

`$HOME/.config/sequencer64/sequencer64.rc` holds the "rc" settings for *Sequencer64*.

`$HOME/.config/sequencer64/sequencer64.usr` holds the "user" settings for *Sequencer64*.

But the old style names are used for the "legacy" mode. See the `--legacy` option below. Here is the basic command line:

```
sequencer64 [OPTIONS] [FILENAME]
seq64 [OPTIONS] [FILENAME]
```

Sequencer64 accepts the following options, plus an optional name of a MIDI file. Please note that many of the options are 'sticky'. If they are used on the command-line, their settings are saved to the configuration files when *Sequencer64* exits.

-h --help

Display a list of all command-line options, then exit.

-v --version

Display the program version, then exit.

-H --home [directory]

New: Change the "home" directory from `.contrib/sequencer64` (always relative to `$HOME`). This option causes the `sequencer64.rc` and `sequencer64.usr` files to be loaded from or saved to a different directory. Format: `--home dirname`.

-l --legacy

New: Save the MIDI file in the old Seq24 format, as unspecified binary data, instead of as a legal MIDI track with meta events. Also read the configuration, if provided, from the "legacy" `~/.seq24rc` and `~/.seq24usr` files.

The user-interface will indicate this mode with a small text note. This mode is also used if *Sequencer64* is invoked as the `seq24` command (one can create a soft link to the `sequencer64` executable to make that happen).

-b --bus [buss]

New: Supports modifying the buss number on all tracks when a MIDI file is read. All tracks are loaded with this buss-number override. This feature is useful for testing, making it easy to map the MIDI file onto the system's current hardware/software synthesizer setup. Also note that this option applies the MIDI buss override to any new sequences, as well.

Format: `--bus bussnumber` or `--buss bussnumber`.

Most of the time, one will want to set this value to -1.

-q --ppqn [ppqn]

New: Supports modifying the PPQN value of Sequencer64, which defaults to a value of 192. This setting should allow MIDI files to play back at the proper speed, and be written with the new PPQN value. This feature is basically done. One can load MIDI files of arbitrary PPQN, and they play normally and look normal in the editor windows. They can also be saved, and reloaded with the new PPQN value. Format: `--ppqn ppqnnumber`. The *ppqnnumber* can range from 32 to 19200. It can also be set to 0... in this case, *Sequencer64* uses the PPQN from the loaded file as its internal PPQN value.

-L --lash

New: If LASH support is compiled into the program, this option enables it. If LASH support is not compiled into the program, this option will not be shown in the output of the `-help` option.

-n --no-lash

New: If LASH support is compiled into the program, this option disables it, even if the default or configuration file set it. If LASH support is not compiled into the program, this option will not be shown in the output of the `-help` option.

N/A --file [filename]

Load a MIDI file on startup. **Bug:** This option does not exist. Instead, specify the file itself as the last command-line argument.

-m --manual-alsa-ports

Sequencer64 won't attach the system's existing ALSA ports. Instead, it will create its own set of input and output busses/ports.

-a --auto-alsa-ports

Sequencer64 will attach the system's existing ALSA ports. This variant is useful for overriding the rc configuration file.

-r --reveal-alsa-ports

New: *Sequencer64* will show the names of the ALSA port that the system defines, rather than the names defined in the 'user' configuration file.

-R --hide-alsa-ports

Sequencer64 will show the names of the ALSA port that the 'user' configuration file define, rather than the names defined by ALSA.

-A --alsa

Sequencer64 will not run the JACK support, even if specified in the configuration file. The configuration options are sticky (they are saved), and sometimes they aren't what you want to run.

-s --show-midi

Dumps incoming MIDI to the screen.

-p --priority

Runs at higher priority with a FIFO scheduler.

N/A --pass-sysex

Passes any incoming SYSEX messages to all outputs. Not yet supported.

-i --ignore [number]

Ignore ALSA device [number].

-k --show-keys

Prints pressed key value.

-K --inverse

Changes the color scheme for the sequence editor and performance editor piano rolls. It basically inverts the colors. It can be considered kind of a "night mode".

-x --interaction-method [number]

Select the mouse interaction method. 0 = seq24 (the default); and 1 = fruity loops method. The latter does not completely support all actions supported by the Seq24 interaction method, at this time.

The following options will not be shown by `-help` if the application is not compiled for JACK support.

-j --jack-transport

Sequencer64 will sync to JACK transport.

-J --jack-master

Sequencer64 will try to be JACK master.

-C --jack-master-cond

JACK master will fail if there is already a master.

-M --jack-start-mode [x]

When *Sequencer64* is synced to JACK, the following play modes are available: 0 = live mode; and 1 = song mode, the default.

-S --stats

Print statistics on the command-line while running. Not available unless this option has been compiled in at build time, which can be determined by using the `--version` option.

-U --jack-session-uuid [uuid]

Set the UUID for the JACK session.

-u --user-save

Save the "user" configuration file when exiting Sequencer64. Normally, it is saved only if not present in the configuration directory, so as not to get stuck with temporary settings such as the `-bus` option. Note that the "rc" configuration option are generally also saved. But see the "auto-option-save" directive in the "rc" file. It is new with version 0.9.9.15.

-f --rc filename

Use a different "rc" configuration file. It must be a file in the user's `$HOME/.config/sequencer64` directory or the directory specified by the `-home` option. Not supported by the `-legacy` mode. The '.rc' extension is added if no extension is present in the filename.

-F --usr filename

Use a different "usr" configuration file. It must be a file in the user's `$HOME/.config/sequencer64` directory or the directory specified by the `-home` option. Not supported by the `-legacy` mode. The '.usr' extension is added if no extension is present in the filename.

-c --config basename

Use a different configuration file base name for the 'rc' and 'usr' files. For example, one can specify a full configuration for "testing", for "jack", or for "alsa", to set up `testing.rc` and `testing.usr`, `jack.rc` and `jack.usr`, `alsa.rc` and `alsa.usr`.

-o --option opvalue

Provides additional options, since the application is running out of single-character options. The `opvalue` set supported is:

- **daemonize**. Makes the `seq64cli` application fork to the background.
- **no-daemonize**. Makes the `seq64cli` application run in the foreground, where it is easy to see the informational output written to the console.
- **log=filename.log**. Reroutes standard error and standard output messages to the given log-file. This file is located in the directory for the "rc" and "usr" files (which can be altered via the `-H/--home` directory option). If this file is already present, additional log information is appended to it. If the "=filename.log" portion is missing, the log-file name in the `[user-options]` section of the "usr" file is used as the default log-file, if this file-name is not empty.
- **wid=3x2,i**. Provides for multiple main windows ("mainwids") to be shown in a big grid, so that multiple sets can be viewed at the same time. The default is to show the usual single mainwid. The first number specified is the row count, which can range from 1 to 3. The second number specified is the column count, which can only be 1 or 2. The third parameter starts with 't' ("true") to indicate that the multiple sets will be controlled by a single set spinner, which is the default. Specifying 'f' ("false") or 'i' ("indep") will show one set spinner for each mainwid. Note that it is possible, in this mode, to show the same set in two different mainwids, but this is not recommended, as there are minor unavoidable issues with that. Also note that the format for this command line option is very strict, no deviations or added spaces. Finally, to save these options to the "usr" file, add the `--user-save` option to the command line. In that file, the options modified are `block_rows` and `block_columns`.
- **sets=8x8**. This option, informally known as "variset", allow some changes in the set size and layout from the default `4x8 = 32` sets layout. **Warning:** `seq24` was fairly hardwired for supporting 32 patterns per set, and there are still places where that is true. Thus, consider this option to be experimental. To save these options to the "usr" file, add the `--user-save` option to the command line. In that file, the options modified are `mainwnd_rows` and `mainwnd_cols`.

- **scale=x.y.** This option scales the main window by the factor x.y, which can range from 0.75 to 3.0. This makes the main window larger, and most of its contents larger. It does not currently scale the fonts used in the display. A scale factor of 2.5 is about the maximum useful value. If multi-wid is active, then you probably need a larger monitor to use this factor.

`$HOME/.config/sequencer64.rc` holds the main configuration settings for all versions of Sequencer64. If it does not exist, it will be generated when Sequencer64 exits. If it does exist, it will be rewritten with the current configuration of Sequencer64. Many, or most, of the command-line options are "sticky", in that they will be written to the configuration file.

`$HOME/.config/sequencer64 usr` stores the MIDI-configuration settings and some of the user-interface settings for Sequencer64. If it does not exist, it will be generated with a minimal configuration when Sequencer64 exits. If it does exist, it will be rewritten with the current configuration of Sequencer64, but *only* if the `--user-save` option was provided on the command-line. Note that the `--legacy` option causes the old configuration-file names (`.seq64rc` and `.seq64usr` in the `$HOME` directory) to be used.

The current Sequencer64 project homepage is a git repository at

<https://github.com/ahlstromcj/sequencer64.git>.

Up-to-date instructions can be found in the project at

<https://github.com/ahlstromcj/sequencer64-doc.git>.

The old Seq24 project homepage is at <http://www.filter24.org/seq24/> the new one is at <https://edge.launchpad.net/seq24/>. It is released under the GNU GPL license. Sequencer64 is also released under the GNU GPL license.

Sequencer64 was written by Chris Ahlstrom ahlstromcj@gmail.com (with a fair amount of help). *Seq24* was written by Rob C. Buse seq24@filter24.org and the *Sequencer64* team.

This manual page was written by Dana Olson <mailto:seq24@ubuntustudio.com> with additions from Guido Scholz <mailto:guido.scholz@bayernline.de> and Chris Ahlstrom <mailto:ahlstromcj@gmail.com>.

12 Sequencer64 Qt5/PortMidi

With version 0.95.1 of *Sequencer64*, we now provides builds using the *Qt 5* GUI framework and a heavily modified version of the PortMidi framework. With this additional work, we now have *Sequencer64 for Windows*.

Currently, the Qt 5 user-interface is fundamentally the same as the *Kepler34* project ([9]). But it uses the internal functions of *Sequencer64* and adds a few features not yet present in *Kepler34*. It uses a tabbed interface, and slightly different ways of handling the main window (the "Live" tab), the performance window (the "Song" tab), and the editing window (the "Edit" tab).

There is still a little amount of *Sequencer64* functionality that the Qt5/PortMidi version lacks:

1. No support for the special coloring of empty pattern slots or the pattern currently being edited.
2. A reduced-functionality options/preferences dialog, lacking an editor for keystroke commands.
3. Keystroke support is not as comprehensive as the Linux version.
4. No support yet for variset or multi-wid. What we will probably implement is variset and allow for any number of external live frames so that an arbitrary number of sets (banks) can be shown at once, each in its own window.

We are incorporating existing *Sequencer64* user-interface features into this Qt5/PortMidi version as time and bug-fixes allow.

With version 0.95.1, we have improved the Qt/Windows version by adding the following features:

1. An external pattern editor has been added that pretty much matches the standard *Sequencer64* pattern editor. The tabbed pattern editor is still in place, but, due to space considerations, it will never support all of the features of the external window.
2. The LFO (low-frequency oscillator) window now exists, and it can be called up from the external pattern editor.
3. The external pattern editor supports background sequences, chord entry, event merging and extension, scales, snap, etc.
4. The song editor has been improved, and also made available as an external window.
5. The pattern and song editors now have better support for zooming via keystrokes.

Some ill-advised features from *Sequencer64* will not be migrated. Ultimately, we want to replace the Gtkmm-2.4 user-interface completely. But this is awhile down the road.

There are a number of alternate versions of *Sequencer64* using PortMidi:

1. A Gtkmm-2.4 user interface and PortMidi. This version is Linux-only, and is useful for debugging the internal PortMidi code without worrying about the Qt5 user interface.
2. A Qt 5 user interface and PortMidi on Linux. This version is useful for people who like to experiment, and for debugging Qt5 and PortMidi issues at the same time.
3. A Qt 5 user interface and PortMidi on Windows. This version is basically working, but takes some special setup. See section [12.2 "Sequencer64 Windows Setup"](#) on page [155](#) for details.

We also have code in place to support Mac OSX, but currently have no OSX system on which to build and test this code. HELP WANTED!

In the following sections, we cover the basic differences between the Gtkmm-2.4 and Qt 5 versions of the application, as well as how to set up *Sequencer64* for Windows.

We will not show all of the user interface elements, but we will mention some differences one will find.

12.1 The Qt 5 User Interface

This section is out-of-date; many upgrades were made for version 0.95.1. And there is more to come. Once we get it all finalized, we will update this section and its screen-shots.

The Qt5/PortMidi version of *Sequencer64* has an executable name of **qpseq64** (Linux) or **qpseq64.exe** (Windows). To keep explanations simple, we will refer to the Qt5/PortMidi version of *Sequencer64* as **qpseq64**. The Gtkmm-2.4/RtMidi version (Linux only) will be referred to as **seq64**.

Here is a screenshot of the main user interface of *qpseq64*, with some of the patterns colored for emphasis.

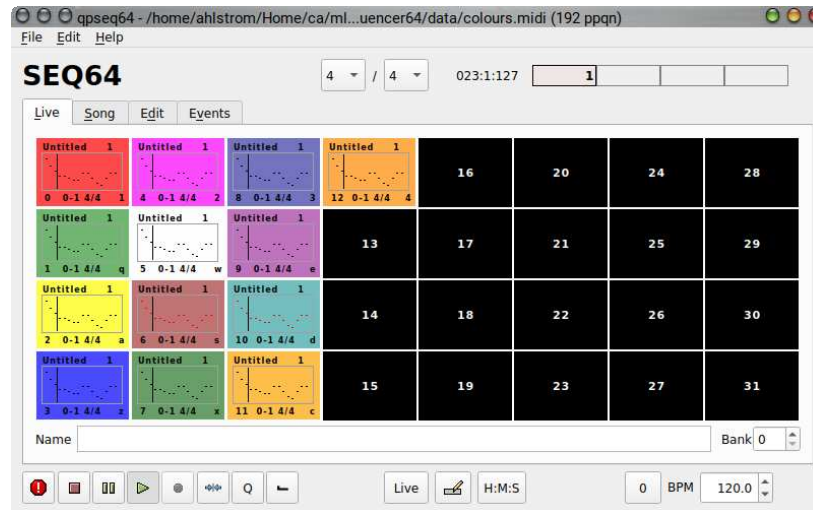


Figure 94: Qt 5 Main Window, Linux

Note the difference in layout from the Gtkmm-2.4 version. Also notice that a number of controls from the Gtkmm version are missing. Some of these missing item will ultimately be added.

Here is a similar screenshot in Windows 10.

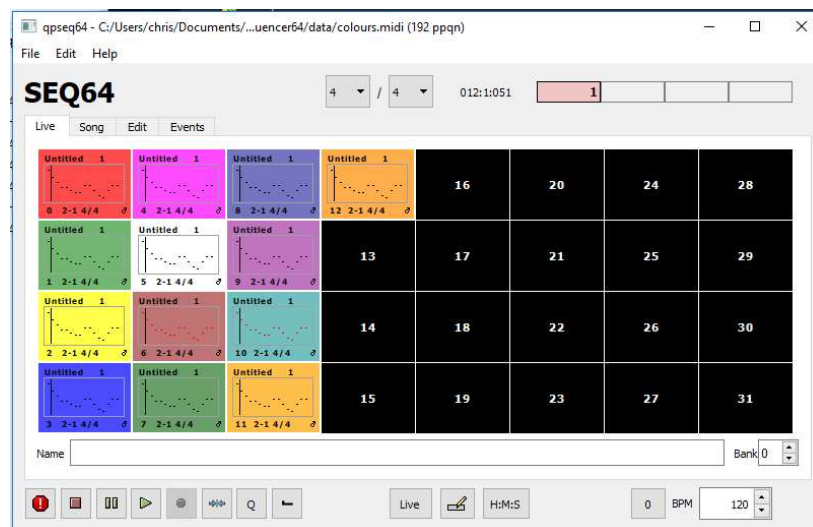


Figure 95: Qt 5 Main Window, Windows 10

Coding an application for both Windows and Linux is very instructive, and often improves the overall code significantly.

12.1.1 Qt 5 Live Tab

The **Live** tab of *qpseq64*, as shown above, is very similar to the *seq64* version. However, it currently doesn't support the varisets mode and the alternate row-by-column sizes of *seq64*. Additional features will be added as time goes on.

The size of this window can be changed to a certain degree via the command-line option `--option scale=x.y`, where `x.y` can range from 0.4 to 3.0. This can be made permanent via the `window-scale` setting in the "usr" file.

In fact, all of the tabs except for the Events tab will expand properly to use additional space if the application is resized.

In the future, we will likely provide external windows so that the user can view and work with a number of set/banks at the same time.

12.1.2 Qt 5 Song Tab

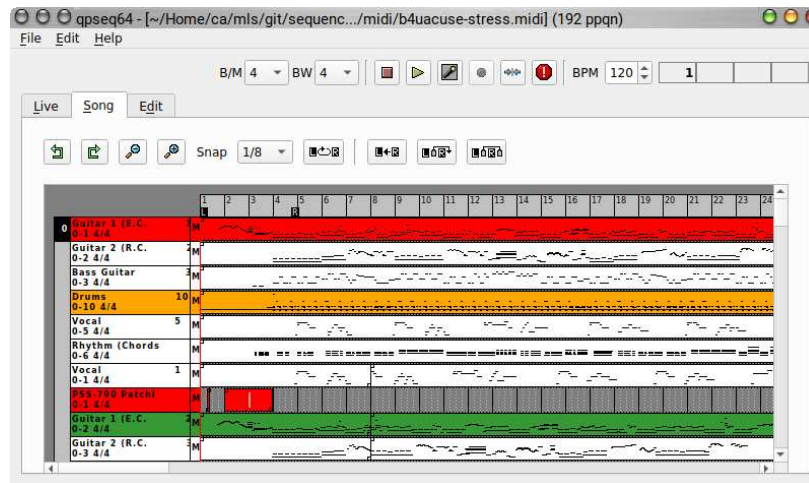


Figure 96: Qt 5 Song Window, Linux

This window is very similar to the *seq64* version. Additional features may be added as time goes on. In addition, this frame can be opened in its own external window by pressing the "Song Editor" button at the bottom of the main window.

12.1.3 Qt 5 Edit Tab

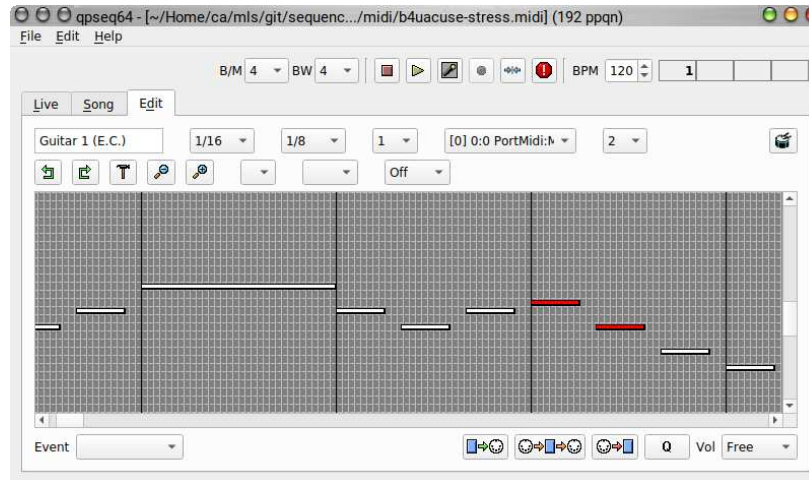


Figure 97: Qt 5 Edit Window, Linux

This version of the pattern editor is a bit behind *seq64* for features, and currently looks more like the Gtkmm-2.4 version.

In addition, note that the event-data editor panel is not visible here. One must scroll down to the bottom of the window to see it and use it. Also note that that the **LFO** window is not accessible here. Finally, note that the note heights and vertical grid spacing are modifiable via

With version 0.95.1, the pattern/slot popup menu has an option to open the pattern in an external window that has a lot more features than the pattern editor in the tab. It also has a different scrolling mechanism, more like that of *seq64*. Note that only one of the tab/external pattern editors can be shown at the same time for a given pattern. This pattern editor is pretty much identical to the Gtkmm-2.4 version, except that it does not provide a "fruity" mode of mouse usage.

12.1.4 Qt 5 Events Tab

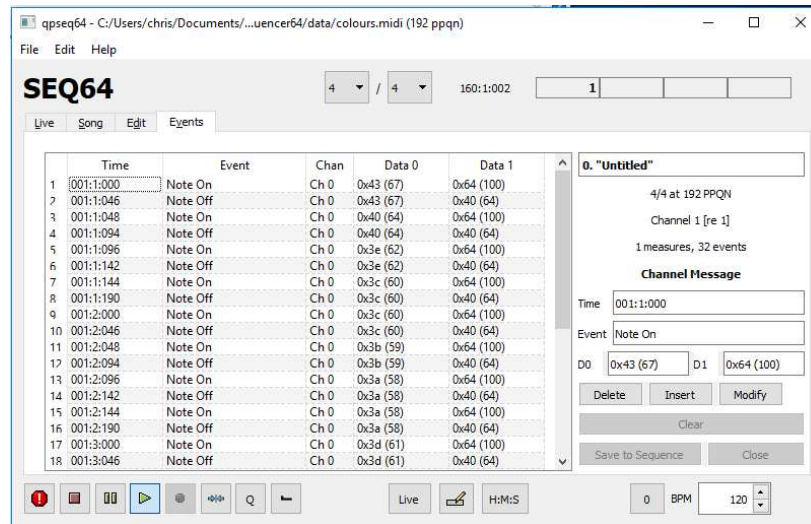


Figure 98: Qt 5 Events Window

This window works a lot like section 6 "Event Editor" on page 93; please see that section for user instructions. Please remember that, at the present time, this view is meant only for viewing events and making minor tweaks to a pattern, such as eliminating problematic events. It is not intended to be a full-featured event editor. In particular, note that editing within each cell in the event table is not supported. Event editing must be done in the right panel. An event must be explicitly selected by clicking on it, before it can be modified or deleted.

Also, if one adds or modifies an event to show up at the end of the pattern, by modifying the time stamp, the event will appear there, but the user-interface will remain at the current event.

12.1.5 Qt 5 Edit / Preferences

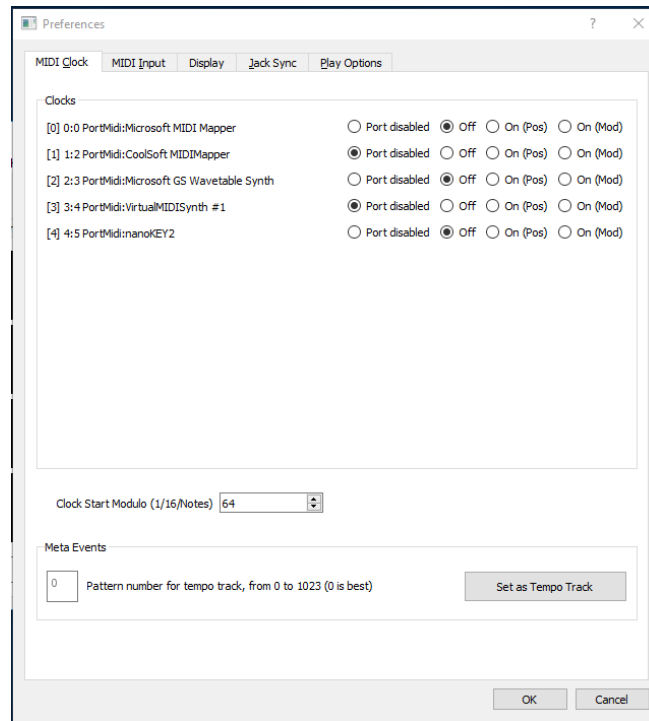


Figure 99: Qt 5 Clock Preferences, Windows

In a newer version of this document, we will show the other preferences tabs. There are many tabs we still need to add to this dialog.

In particular, be sure to go to the **MIDI Input** tab and make sure that your desired input device (e.g. a MIDI keyboard) are shown and are enabled.

Since the Qt GUI pretty much hardwires the keystrokes used for various functions such as muting and queuing, we might not provided a keystroke mapping editor. To be determined.

In any event, many of the keystrokes configured in the "rc" file are supported, but one might have to edit the "rc" file directly, keeping in mind that it uses Gtkmm-2.4 conventions for keystrokes.

12.2 Sequencer64 Windows Setup

Sequencer64 for Windows (*qps64*) can be installed as a portable Zip package anywhere the user desires. The package is self-contained, and contains all the the DLLs needed to run the program. *qps64* can also be installed via an NSIS-based installer, currently *sequencer64_setup-0.95.0-0.exe*.

12.2.1 Sequencer64 Windows Issues

When first starting *qps64* on *Windows*, one might experience some issues. One issue is that the *Microsoft MIDI Mapper*, rumored to be removed in *Windows 8* and beyond, is still detected by the internal PortMidi library used in *qps64*. Another issue is that the built-in *Microsoft* wave-table synthesizer might not be accessible.

We installed the *CoolSoft MIDIMapper* ([4]) and *VirtualMIDISynth* ([5]) to try to get around these issues, and tried to turn off the Windows System Sound setup of "Allow applications to restrict access to this device." But we still had inaccessible devices, and the resulting errors would cause *qpseq64* to abort. So we had to spend a lot of time adding support for the disabling of inaccessible ports, and saving and restoring the "rc" setup properly in the face of device-access errors.

Here is some output logging on our Windows, generated using the *qpseq64* command-line option `-o log=virtualmidi.log`, which dumps the log file into `C:/Users/chris/AppData/Local/sequencer64/virtualmidi.log`.

```
qpseq64
C:/Users/chris/AppData/Local/sequencer64/virtualmidi.log
2018-05-13 09:06:58
[MIDIMAPPER] 'mapper in : midiInGetDevCaps() error for device 'MIDIMAPPER':
    'The specified device identifier is out of range'
pm_winmm_general_inputs(): no input devices
PortMidi MMSystem 0: Microsoft MIDI Mapper output opened
PortMidi MMSystem 1: CoolSoft MIDIMapper output closed
PortMidi MMSystem 2: Microsoft GS Wavetable Synth output opened
PortMidi MMSystem 3: VirtualMIDISynth #1 output closed
[Opened MIDI file,
    'C:/Users/chris/Documents/Home/sequencer64/data/b4uacuse-gm-patchless.midi']
[Writing rc configuration C:/Users/chris/AppData/Local/sequencer64/qpseq64.rc]
PortMidi call failed: [-1] 'Bad pointer'
PortMidi call failed: [-1] 'Bad pointer'
Begin closing open devices...
Warning: devices were left open. They have been closed.
```

We still have some minor issues at start up and at exit, but are now able to play a tune on the wavetable synthesizer using the `--bus 2` option, which forces output to PortMidi buss 2, "Microsoft GS Wavetable Synth".

12.2.2 Sequencer64 Windows Configuration Files

When you first run *qpseq64* on Windows, it will create a new configuration file, with inaccessible devices denoted in the [midi-clock] section of `C:/Users/username/AppData/Local/sequencer64/qpseq64.rc` by a -1 value.

On Linux, the normal directory location of the *Sequencer64* configuration files is `/home/username/.config/sequencer64`. There are various configuration file names, depending on the name of the built application:

<code>sequencer64.rc</code>	The RtMidi Native ALSA/JACK version.
<code>sequencer64.usr</code>	The same, but for user-interface settings.
<code>seq64portmidi.rc</code>	The PortMidi Gtkmm 2.4 version.
<code>seq64portmidi.usr</code>	The same, but for user-interface settings.
<code>qpseq64.rc</code>	The PortMidi Qt 5 version.
<code>qpseq64.usr</code>	The same, but for user-interface settings.

On Windows, the conventional location is different, and the location used is `C:/Users/username/AppData/Local/sequencer64`. The files are:

qpseq64.rc	The PortMidi Qt 5 version for Windows.
qpseq64.usr	The same, but for some user-interface settings.

Typical of *Microsoft*, access to the `AppData` directory is not obvious... "we cannot have users monkey-ing with the configuration". To access `AppData`, highlight the user-name directory (e.g. `C:/Users/chris`, then append "`AppData`" to the end of it. Voila! It is now visible in *Windows Explorer*. It is a Windows thang.

Then click on the `sequencer64` directory. Open `qplseq64.rc` and see what is in it (scroll down a bit):

```
[midi-clock]

2      # number of MIDI clocks/busses

# Output buss name: [0] 0:0 PortMidi:Microsoft MIDI Mapper
0 0    # buss number, clock status

# Output buss name: [2] 1:1 PortMidi:Microsoft GS Wavetable Synth (virtual)
1 0    # buss number, clock status

# Output buss name: [3] 1:1 PortMidi:nanoKEY2
2 0    # buss number, clock status

[midi-input]

1      # number of input MIDI busses

# The first number is the port number, and the second number
# indicates whether it is disabled (0), or enabled (1).

# [1] 0:1 PortMidi:nanoKEY2
0 1
```

These settings can be accessed via **Edit / Preferences / MIDI Clock** and **Edit / Preferences / MIDI Input** to alter the ports accessible, in the *Windows* version of *Sequencer64*. The operating system may have some devices locked out, though.

Generally, the device needs to have a "System Sound" setting that allows an application to grab exclusive access to the device. For now, do a web search for this error message:

```
'The specified device is already in use.  Wait until it is free, and then
try again.'
```

13 Concepts

The *Sequencer64* program is basically a loop-playing machine with a fairly simple interface. Before we describe this interface, it is useful to present some concepts and definitions of terms as they are used in

Sequencer64. Various terms have been used over the years to mean the same thing (e.g. "sequence", "pattern", "loop", and "slot"), so it is good to clarify the terminology.

13.1 Concepts / Terms

This section doesn't provide comprehensive coverage of terms. It covers terms that puzzled the author at first or that are necessary to understand the *Sequencer64* program.

13.1.1 Concepts / Terms / armed

An armed sequence is a sequence (see section [13.1.18 "Concepts / Terms / sequence"](#) on page 160) that will be heard. "Armed" is the opposite of "muted". Performing an *arm* operation in *Sequencer64* means clicking on an "unarmed" sequence in the patterns panel (the main window of *Sequencer64*). An unarmed sequence will not be heard, and it has a white background. When the sequence is *armed*, it will be heard, and it has a black background. A sequence can be armed or unarmed in three ways:

- Clicking or Shift-clicking on a sequence/pattern box.
- Pressing the hot-key for that sequence/pattern box.
- Opening up the Song Editor and starting playback; the sequences arm/unarm depending on the layout of the sequences and triggers in the piano roll of the Song Editor.

13.1.2 Concepts / Terms / buss (bus)

A *buss* (also spelled "bus" these days; <https://en.wikipedia.org/wiki/Busbar>) is an entity onto which MIDI events can be placed, in order to be heard or to affect the playback. A *buss* is just another name for port. See section [13.1.12 "Concepts / Terms / port"](#) on page 159.

13.1.3 Concepts / Terms / export

A *export* in *Sequencer64* is a way of writing a song-performance to a more standard MIDI file, so that it can be played by other sequencers. An export collects all of the unmuted tracks that have performance information (triggers) associated with them, and creates one larger trigger for each track, repeating the events as indicated by the original performance.

13.1.4 Concepts / Terms / group

A *group* in *Sequencer64* is one of up to 32 previously-defined mute/unmute patterns in the active screen set. A group is a set of patterns, in the current screen-set, that can arm (unmute) their playing state together. Every group contains all 32 sequences in the active screen set. This concept is similar to mute/unmute groups in hardware sequencers. Also known as a "mute-group".

13.1.5 Concepts / Terms / loop

Loop is a synonym for *pattern* or *sequence*, when used in existing *Seq24* documentation. Each loop is represented by a box (pattern slot) in the Pattern (main) Window.

13.1.6 Concepts / Terms / measures ruler

The *measures ruler* is the bar at the top of the Pattern Editor and Song Editor windows that shows the numbering of the measures in the song. Left, right, or end markers can be dropped on this ruler to set durations to be played, looped, expanded, or collapsed.

Note: The original *Seq24* documentation calls this item the *bar indicator*.

13.1.7 Concepts / Terms / event strip

The *event strip* is the bar at the bottom of the Pattern Editor window that shows the location of events in the pattern. For Note On and Note Off events, it is shown in gray to warn the user to be careful in moving these events.

13.1.8 Concepts / Terms / muted

The opposite of section [13.1.1 "Concepts / Terms / armed"](#) on page [158](#).

13.1.9 Concepts / Terms / MIDI clock

MIDI clock is a MIDI timing reference signal used to synchronize pieces of equipment together. MIDI clock runs at a rate of 24 ppqn (pulses per quarter note). This means that the actual speed of the MIDI clock varies with the tempo of the clock generator (as contrasted with time code, which runs at a constant rate). *Sequencer64* emits MIDI clock events, but does not (yet) follow MIDI clock.

13.1.10 Concepts / Terms / pattern

A *Sequencer64 pattern* (also called a "sequence" or "loop") is a short unit of melody or rhythm in *Sequencer64*, extending for a small number of measures (in most cases). Each pattern is represented by a box in the Patterns window.

Each pattern is editable on its own. All patterns can be layed out in a particular arrangement to generate a more complex song.

pattern is a synonym for *loop* or *sequence*. It is our preferred term.

13.1.11 Concepts / Terms / performance

In the jargon of *Sequencer64*, a *performance* is an organized collection of patterns. This layout of patterns is created using the Song Editor, sometimes called the "performance editor". This window controls the song playback in "Song Mode". The playback of each track is controlled by a set of triggers created for that track.

13.1.12 Concepts / Terms / port

A *port* is just another name for buss. See section [13.1.2 "Concepts / Terms / buss \(bus\)"](#) on page [158](#). Each port can support 16 MIDI channels.

13.1.13 Concepts / Terms / pulses per quarter note

The concept of "pulses per quarter note", or PPQN, is very important for MIDI timing. To make it a bit more confusing, sometimes these pulses are referred to as "ticks", "clocks", and "divisions". To make it even more confusing, there are separate timing concepts to understand, such as "tempo", "beats per measure", "beats per minute", "MIDI clocks", and more.

While a full description of all these terms, and how they are calculated, is beyond the scope of this document, we will try to clarify the discussion when such confusion could be an issue.

13.1.14 Concepts / Terms / queue mode

To "queue" a pattern means to ready it for playback on the next repeat of a pattern. A pattern can be armed immediately, or it can be queued to play back the next time the pattern restarts. Pattern toggles occur at the end of the pattern, rather than being set immediately.

A set of queued patterns can be temporarily stored, so that a different set of playbacks can occur, before the original set of playbacks is restored.

The "keep queue" functionality allows the queue to be held without holding down a button the whole time. Once this key is pressed, then the hot-keys for any pattern can be pressed, over and over, to queue each pattern.

13.1.15 Concepts / Terms / replace

Replacement is a form of muting/unmuting. When the "replace" key is pressed while click a sequence, that sequence is unmuted, and all of the other sequences are muted.

13.1.16 Concepts / Terms / screen set

The *screen set* is a set of patterns that fit within the 8x4 grid of loops/patterns in the Patterns panel. *Sequencer64* supports multiple screens sets, up to 32 of them, and a name can be given to each for clarity. Some day *Sequencer64* will support an 8x8 grid and 64 patterns per screen set.

13.1.17 Concepts / Terms / bank

The term *bank* comes from the *Kepler34* application. It means the same thing as *screen set*.

13.1.18 Concepts / Terms / sequence

Sequence is another synonym for *pattern*, used in some of the *Seq24* documentation. *Loop* is another synonym. Each sequence is represented by a box (pattern slot) in the Patterns window.

Note that many, for other sequencer applications) use the term "sequence" to apply to the complete song, and not just to one track or pattern in the entire song.

13.1.19 Concepts / Terms / snapshot

A *Sequencer64 snapshot* is simply a briefly preserved state of the patterns. One can press a snapshot key, change the state of the patterns for live playback, and then release the snapshot key to revert to the state when it was first pressed. (One might call it a "revert" key, instead.)

13.1.20 Concepts / Terms / song

A *song* is a collection of patterns in a specific layout, as assembled via the Song Editor window. Also see [13.1.11](#)

13.1.21 Concepts / Terms / trigger

A *trigger* is a small data structure that indicates when a sequence should be played, and how much of the sequence (including repeats) should be played. A song performance consists of a number of sequences, each triggered in ways that the musician can lay out.

13.2 Concepts / Sound Subsystems

13.2.1 Concepts / Sound Subsystems / ALSA

ALSA is a sound and MIDI system for Linux, with components built into the Linux kernel. It is the main subsystem used by *Sequencer64*. The name of the library used to build *ALSA* projects is `libasound`. See reference [1].

13.2.2 Concepts / Sound Subsystems / PortMIDI

PortMIDI is a cross-platform API (applications programming interface) for MIDI. It seems to be used in the "portmidi" C++ modules included with the base source-code repository of *Seq24* available (for example) from Debian Linux. See reference [17] for the PortMIDI home page. Unfortunately, the code in the Debian package is not quite ready to build on Windows. We might fix that someday, though Windows is not a high priority.

The SubatomicGlue Windows port of *Seq24* (see reference [32]) bundles a version of the PortMIDI project with the source code for the port. It also provides a complete bundle of the other products (e.g. gtkmm 2.4) needed to build and run the project. (By the way, the Windows port is built with MingW, which provides the GNU compilers and tools. This is a good thing, as Visual Studio Community, though "free", is not "Free".)

13.2.3 Concepts / Sound Subsystems / JACK

JACK is a cross-platform (with an emphasis on Linux) API and infrastructure for making it easier to connect and reroute MIDI and audio event between various applications and hardware ports. See reference [8].

14 Building Sequencer64 From Source Code

The current packaging for Sequencer64 is primarily aimed at developers. But note that we're starting to add Debian packages to a new "Sequencer64 Packages" project ([31]). If one has packages built for other Linux distributions, let us know, and we can stick them there for others to use.

This section presents a how-to on building the various versions of *Sequencer64* from source code. It's actually pretty easy, with these instructions.

14.1 INSTALL

There are many build options. Some are modifiable via the normal GNU **configure** script method. Many more are modifiable by editing the source code to **define** and **undefine** certain macros. If you don't care about options, start here. If you want to see what options are available, skip to section 14.2.1 "Using More "configure" Options" on page 163, which has many details one can adjust.

There is currently no **configure** script... it must be created by using the **bootstrap** script, as the following instructions make clear.

Steps:

1. Preload any dependencies, as listed in section 14.3 "Sequencer64 Build Dependencies" on page 169. However, if some are missing, the configure script will tell you, or, at worst, a build error will.
2. Check-out the branch you want; normally you will be happy to get "master". Make a branch if you want to make changes.
3. From the top project directory, run the commands:

```
$ ./bootstrap
$ ./configure
```

4. For debugging without libtool getting in the way, just run one of the following commands, which will run the **configure** script, adding the **--enable-debug** and **--disable-shared** options to it.

```
$ ./bootstrap --enable-debug
$ ./bootstrap -ed
```

5. Run the make command:

```
$ make
```

6. To install *Sequencer64*, become root and run:

```
# make install
```

Note that one has to build the documentation and debian packaging separately, they are not part of the default build.

Please note that there are other things one can do to speed up the build process. Already noted above is the **--enable-debug** option. The following command will bootstrap the code and then configure for release mode, and greatly reduce the amount of compiler output:

```
$ ./bootstrap --enable-release
$ ./bootstrap -er
```

This option will run the following command:

```
$ ./configure --enable-silent-rules
```

It results in abbreviated output, which makes it easier to see any warnings that might pop up. This anti-verbosity option can be overridden at "make" time:

```
$ make V=1
```

(Using `V=0` is another way to quiet down the build.)

Also note that the build can be sped up by telling make to use more cores. For example, if one has an 8-core system:

```
$ make -j 9
```

Of course, one can use fewer than the number of cores, if desired.

14.2 Options for Sequencer64 Features

Sequencer64 comes with options for the `configure` command and options represented by definable macros in the source code.

14.2.1 Using More "configure" Options

The following `configure` options can be specified on the command line:

1. `--enable-rtmidi`. This option can be bootstrapped directly using (for example) `./bootstrap -er -rm`. However, this option is currently the default build. It creates the default version of *Sequencer64*, an executable named `seq64`. This version adds the ability to do JACK input/output using the native API... no more need to use `a2jmidid` to bridge from ALSA to JACK. It provides a JACK client that is separate from the pre-existing JACK-transport client. In addition, this executable will fall back to using ALSA if JACK is not running. Like the ALSA support, the JACK support has an auto-connect feature that can be disabled using the "manual" ("virtual-port") mode of `seq64`.

One other note. We term this version "rtmidi" because we originally used the RtMidi ([18]) project as the basis for the native JACK support, until we realized it does not really fit the usage model of *Sequencer64*. So we heavily refactored how it works, keeping a couple of key features, and keeping the moniker "rtmidi".

2. `--enable-cli`. This option can be bootstrapped directly using (for example) `./bootstrap -er -cli`. It builds a command-line version of `seq64` that has the command name `seq64cli`. Currently, this application can only be controlled via MIDI controls set up in the [midi-control] section of the "rc" file. See section 9.1 "Sequencer64 "rc" File / MIDI Control Section" on page 109, for more information on those controls, which now also include start, stop, and pause commands. Also, currently the only way to load a MIDI file is as the last command-line argument. There is also an option to make the application fork into the background as a daemon. We're looking in to using OSC as a control mechanism, but, until then, this executable is of limited usefulness.

3. **--enable-alsamidi.** This option can be bootstrapped directly using (for example) `./bootstrap -er -am`. This executable is basically the original version of *Sequencer64*, with the original executable name of `sequencer64`, which we're keeping around as a backup while we work the remaining nits out of the "rtmidi" version of the application.
4. **--enable-portmidi.** This option can be bootstrapped directly using (for example) `./bootstrap -er -pm`. This option builds the PortMIDI version of the application, named `seq64portmidi`. This version works with Linux, but was meant as a way to port *seq24* to Windows ("Google" for "seq24 subatomic glue"). However, the *Sequencer64* project deprecates this version. Eventually, we hope to migrate in the Windows and Mac OSX support modules of the RtMidi ([18]) project.
5. **--disable-highlight.** This option undefines the `SEQ64_HIGHLIGHT_EMPTY_SEQS` macro, which is otherwise defined by default. If defined, the application will highlight empty sequences/patterns by coloring them yellow. If not defined, empty sequences/patterns are shown in the normal black-on-white coloring. In either case, empty patterns will not be played.
6. **--disable-lash.** This option undefines the `SEQ64_LASH_SUPPORT` macro, which is otherwise defined by default. Even if this option is left defined, however, *Sequencer64* will still not use LASH support unless one specifies `--lash` on the `sequencer64` command-line or turn on the new `[lash-session]` option in the "rc" configuration file, `~/.config/sequencer64/sequencer64.rc`.
7. **--disable-jack.** This option undefines the `SEQ64_JACK_SUPPORT` macro, which is otherwise defined by default. Even if this option is left defined, however, *Sequencer64* will still not use JACK support unless one specifies the various JACK options on the `sequencer64` command-line or turn them on in the "rc" configuration file, `~/.config/sequencer64/sequencer64.rc`.
8. **--disable-jack-session.** This option undefines the `SEQ64_JACK_SESSION` macro, which is defined if JACK support is defined, and the `jack/session.h` file is found. Again, this option, if left defined, can be affected by command-line options and options in the "rc" configuration file.
9. **--disable-pause.** This option undefines the `SEQ64_PAUSE_SUPPORT` macro, which is defined by default, and provides support for toggling between a Play button and a Pause button, for actually pausing playback in Live mode, and for a new Pause key, which defaults to a period (".").
10. **--disable-chords.** This option undefines the `SEQ64_STAZED_CHORD_GENERATOR` macro. If this macro is defined, then the application is built with support for a Chord button in the pattern editor, which enables entering whole chords with a single click. This feature is grabbed from *Seq32* ([26]).
11. **--disable-transpose.** This option undefines the `SEQ64_STAZED_TRANSPOSE` macro. If this macro is defined, then the application is built with support for a Transpose button in the pattern editor and the song editor. The Transpose button in the pattern editor allows a pattern to be exempt from transposition, while the Transpose button in the song editor allows transposing the entire song (except for exempt patterns). This feature is grabbed from *Seq32* ([26]).
12. **--disable-multiwid.** This option undefines the `SEQ64_MULTI_MAINWID` macro. If this macro is defined (currently the default), then it is possible to show multiple sets in the main window. See section 3.4 "Patterns / Multiple Panels" on page 61, which describes this mode.

To summarize, these options undefine the following build macros:

- `SEQ64_HIGHLIGHT_EMPTY_SEQS`
- `SEQ64_LASH_SUPPORT`
- `SEQ64_JACK_SUPPORT`
- `SEQ64_JACK_SESSION`

- SEQ64_PAUSE_SUPPORT
- SEQ64_STAZED_CHORD_GENERATOR
- SEQ64_MULTI_MAINWID

14.2.2 Manually-defined Macros in the Code

As we have explored what *Seq24* does while we add improvements to *Sequencer64*, we've found a lot of things that might change the code for the worse in some people's minds. So we've been careful to mark those changes with macros. And sometimes we tried a change, but left it disabled. You are free to look at those macros, modify them, and build the source code to one's preferences. If one does not see a macro described below, it means we need to catch up with the documentation.

The following items are not yet part of the configure script, but can be edited manually to achieve the desired settings:

1. SEQ64_EDIT_SEQUENCE_HIGHLIGHT. Already defined in the `perform` module. Provides the option to highlight the currently-editing sequence in the main window view and in the song editor. If the sequence is muted, it is highlighted in black text on a cyan background. If it is unmuted, it is highlighted in cyan text on a black background. The highlighting follows whichever pattern editor or event editor has the focus.

2. SEQ64_USE_NEW_FONT. Already defined in the `font` module. If defined, a new, anti-aliased, bold font is used in the user-interface. This new font is implemented in new XPM files in `resources/pixmaps` directory: `wen*.xpm`. The font is slightly larger, but changes the user-interface sizes only to an infinitesimal degree. Using this new font is the default.

Obsolete: This option is no longer a compile-time option, but a run-time option. It is now the default, but the usage of the old versus new font can be set in the "user" configuration file. Also, if the legacy mode is specified, the old font becomes the default.

3. SEQ64_USE_EVENT_MAP. Already defined in the `event_list` module. It enables the usage of an `std::multimap`, instead of an `std::list`, to store MIDI events. Because the code does a lot of sorting of events, using the `std::multimap` is actually a lot faster (especially under debug mode, where it takes many seconds for a medium-size MIDI file to load using the `std::list` implementation).

There is still a chance that the `std::multimap` might prove the limiting factor during playback. If that is the case, then we would probably implement dumping the multimap to a vector before playback. We shall see!

4. SEQ64_USE_MIDI_VECTOR. Already defined in the `midifile` module. It enables the usage of an `std::vector`, instead of an `std::list`, to store MIDI data bytes. It provides the preferred alternative to the list for storing and counting the bytes of MIDI data. It is an attempt to stop reversing certain events due to the peculiarities of using `std::list` to store MIDI bytes from a sequence. This new implementation uses `std::vector` and does not use `pop_back()` to retrieve the bytes for writing to a file.

5. SEQ64_FOLLOW_PROGRESS_BAR. Already defined in the `app_limits.h` module. It enables the automatic scrolling (horizontal paging) of the pattern editor and song editor piano rolls, to keep the progress bar in view at all times. This feature is useful for patterns that are longer than the span of the editor windows. Such scrolling is a common feature of software MIDI sequencers.

Obsolete: Still need to replicate the descriptions that follow in the proper sections.

6. SEQ64_USE_GREY_GRID. **This item is no longer defined.** Instead, the option is now part of the "rc" configuration file. This description will be moved to the correct section eventually.

This configuration item causes the pattern slots/boxes to be colored grey (actually, they will be colored normally as per the current GTK theme). Otherwise, they are colored black. By default, this value is defined (in the `mainwid` module).

7. SEQ64_USE_WHITE_GRID. **This item is no longer defined.** Instead, the option is now part of the "user" configuration file. This description will be moved to the correct section eventually.

This configuration item causes the pattern slots/boxes to be colored white. Also definable(in the `mainwid` module).

8. SEQ64_USE_BRACKET_GRID. **This item is no longer defined.** Instead, the option is now part of the "user" configuration file. This description will be moved to the correct section eventually. This configuration box that outlines the pattern slots/boxes is painted over to convert the box to look like a pair of brackets. By default, this value is defined (in the `mainwid` module).

9. SEQ64_SEQNUMBER_ON_GRID. **This item is no longer defined.** Instead, the option is now part of the "rc" configuration file. This description will be moved to the correct section eventually.

If the "show sequence numbers" option is on, then each of the blank pattern slots in the main window show the would-be sequence number for that slot. The background color of the numbers will not match the background color of the grid (which matches the chosen GTK theme). But, no matter what the GTK background color, they will at least be visible. There is a little image of this style inside the screenshot shown on the first page of this manual.

If `SEQ64_USE_WHITE_GRID` are defined, so that the grid cells are white, then the sequence numbering looks a little nicer, as can be seen in the following figure:

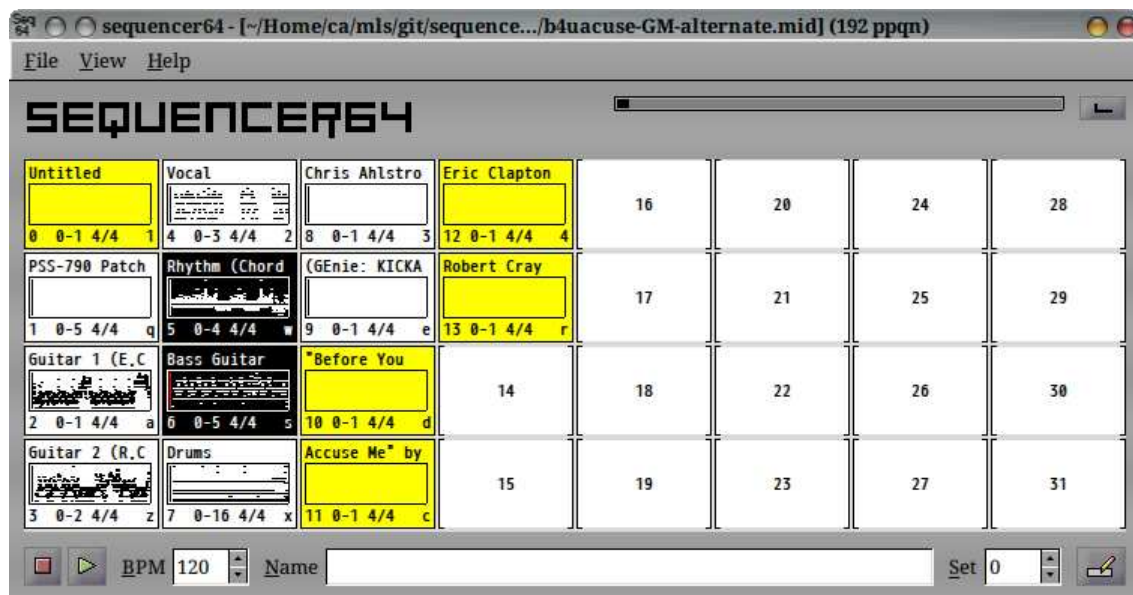


Figure 100: Pattern Window Built for White Grid with Numbering

There is a little image of this style inside the screenshot shown on the first page of this manual, as well.

If neither `SEQ64_USE_GREY_GRID` nor `SEQ64_USE_WHITE_GRID` are defined, so that the grid slots are black, then the numbering will be yellow on a black background, and match perfectly. This style is shown in the following figure:

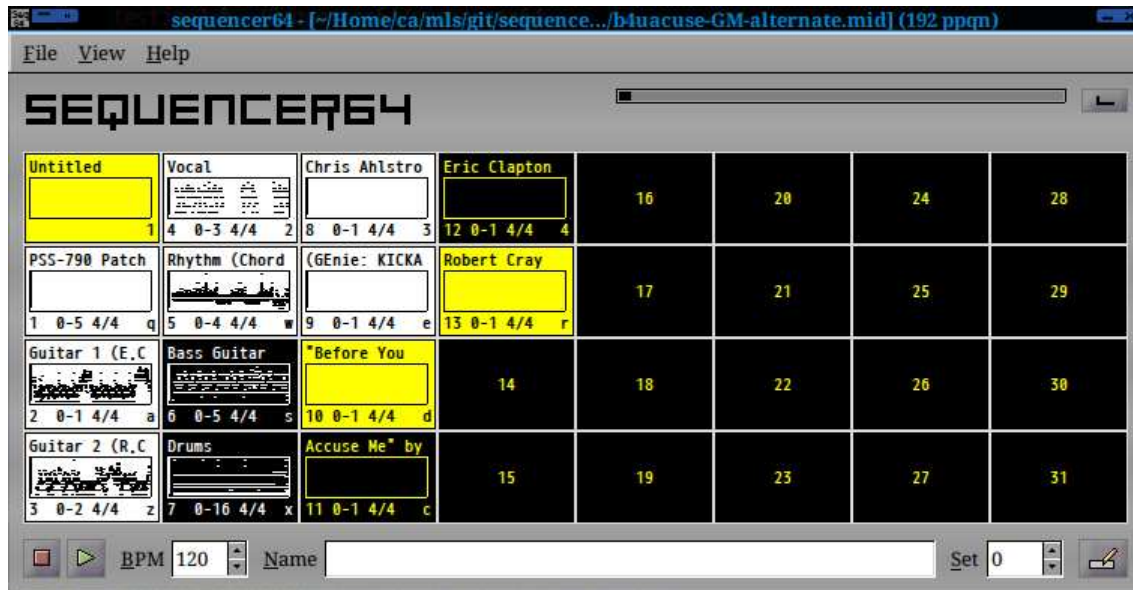


Figure 101: Pattern Window Built for Black Grid with Numbering

There is a little image of this style inside the screenshot shown on the first page of this manual, as well.

Take your pick, modify the code accordingly before building it. Perhaps these can eventually be options for the `configure` script, or even run-time options! Let us know!

10. SEQ64_SOLID_PIANOROLL_GRID. Enabling this macro makes the grid lines for the piano rolls more solid, with about the same perception of lightness. It also calls in some other tweaks, such as the positioning of markers. We currently like this look a little better, and so it is the default. See the `app_limits.h` header file for the definition of this variable.

Here is the pattern editor (sequence editor) with this alternate look.

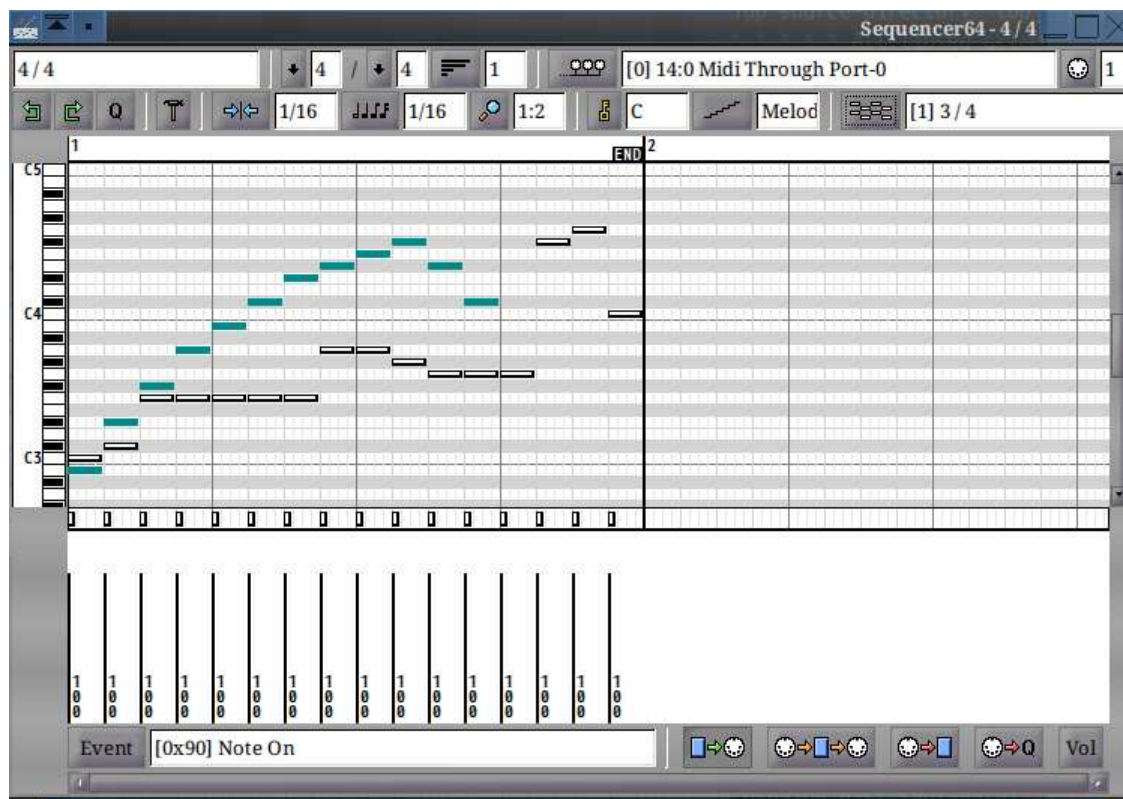


Figure 102: Sequence Pattern Editor Alternate Look

Note the smoothness of the grid lines, the extra emphasis of the C notes at each octave, the emphasis of the note-drawing snap lines that mark the default length of a click-to-add note, the emphasis of the beat and bars, and, finally, the new location of the **END** marker. Also note the dark-cyan background pattern, discussed elsewhere in this document.

Here is the grid-styling for an 8/4 time signature in the song editor:

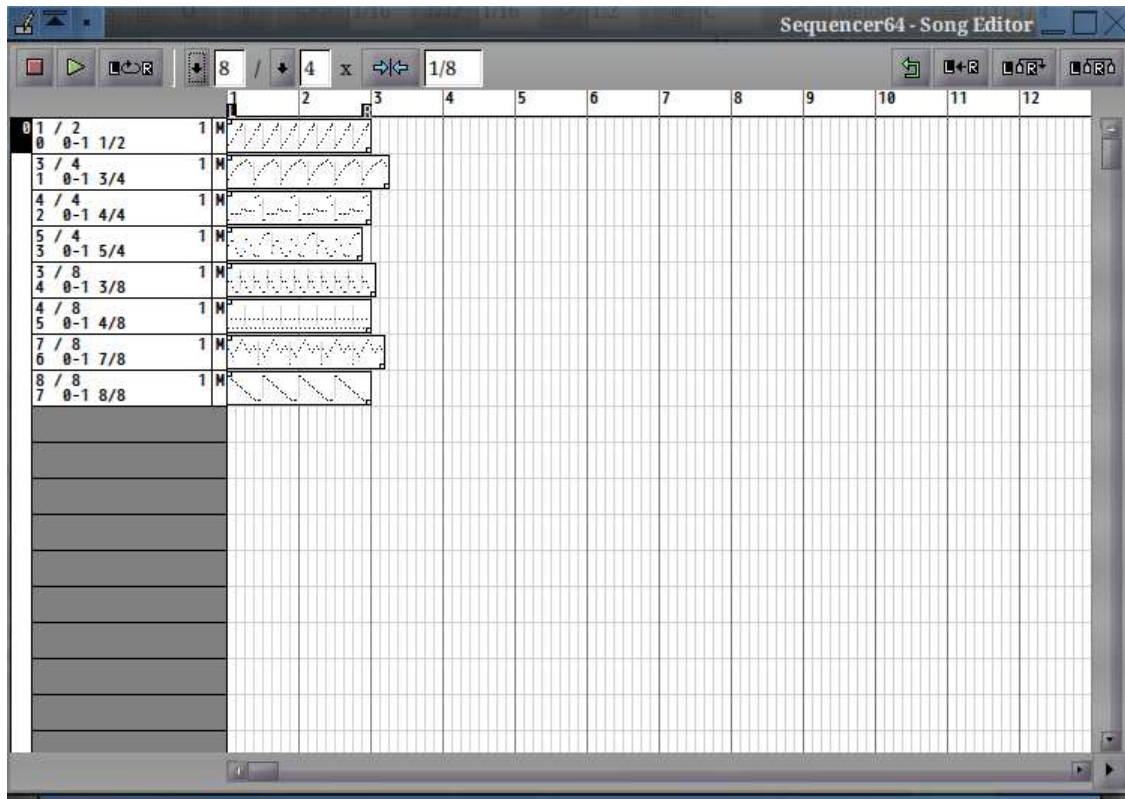


Figure 103: Song Editor Alternate Look

Also note the sequence numbers shown in the bottom left of each pattern name box. This is a new feature, and, as noted elsewhere, is a new option in the *File / Options / Keyboard* tab and in the "rc" configuration file.

11. SEQ64_USE_VI_SEQROLL_MODE. Definable in the seqroll module, this macro allows the vi hjkl keys to be used as arrow keys for moving notes. Not yet tested. We will not make this a default, because it could drive non-vi users nuts.

12. SEQ64_USE_DEBUG_OUTPUT. Enable this macro in the globals.h header file, to see extra console output if the application is compiled for debugging. This macro can be activated only if `PLATFORM_DEBUG` is defined, which is taken care of by the build process. If set, this macro turns on extra console output for the following modules:

- globals
- jack_assistant
- optionsfile
- user_settings

14.3 Sequencer64 Build Dependencies

With luck, the following dependencies will bring in their own dependencies when installed.

Code:

- libgtkmm-2.4-dev (dev is the header-file package)

- libsigc++-2.0-dev
- libjack-jackd2-dev
- liblash-compat-dev (optional)

Runtime:

- libatk-adaptor (and its dependencies)
- libgail-common (and its dependencies)
- valgrind (optional, very useful for debugging)
- gdb (optional, very useful for debugging)
- gprof and gcov (optional, very useful for debugging)

Build tools:

- automake and autoconf
- autoconf-archive
- g++
- make
- libtool
- More?

Documentation:

- doxygen and doxygen-latex
- graphviz
- texlive
- More?

Debian packaging:

- debhelper
- fakeroot
- More?

15 MIDI Format and Other MIDI Notes

15.1 Standard MIDI Format 0

New: *Sequencer64* can now read and import SMF 0 MIDI files, and performs channel splitting automatically.

When an SMF 0 format is detected, *Sequencer64* reads the file as if were an SMF 1 file, but puts all of the events into the same sequence/pattern. While the file is being processed, a list of the channels present in the track is maintained.

Tempo and Time Signature events are also read, if present in the file. (This new feature also holds for SMF 1 songs. In addition, when saving a *Sequencer64* MIDI file, in non-legacy mode, the Tempo

and Time Signature events are now also saved as MIDI events. This allows other sequencers to more thoroughly read a *Sequencer64* MIDI file.)

This addition of Tempo can also fix imported tracks that don't have a measure value (e.g. it has 0 instead of at least one measure) associated with them; unfixed, these tracks have racing progress bars that don't reflect the actual progress through the track.

Once the end-of-track is encountered for that sequence, one new empty sequence is created for each channel found in the original (main) sequence. The events in the main sequence are scanned, one by one, and added at the end of the appropriate sequence. If the event is a channel event, then the event is inserted into the sequence that was created for that channel. If the event is a non-channel event, then each sequence gets a copy of that event.

After processing, the MIDI buss information, track name, and other pieces of information are attached to each sequence. The following figure shows in imported SMF 0 tune, split into tracks.

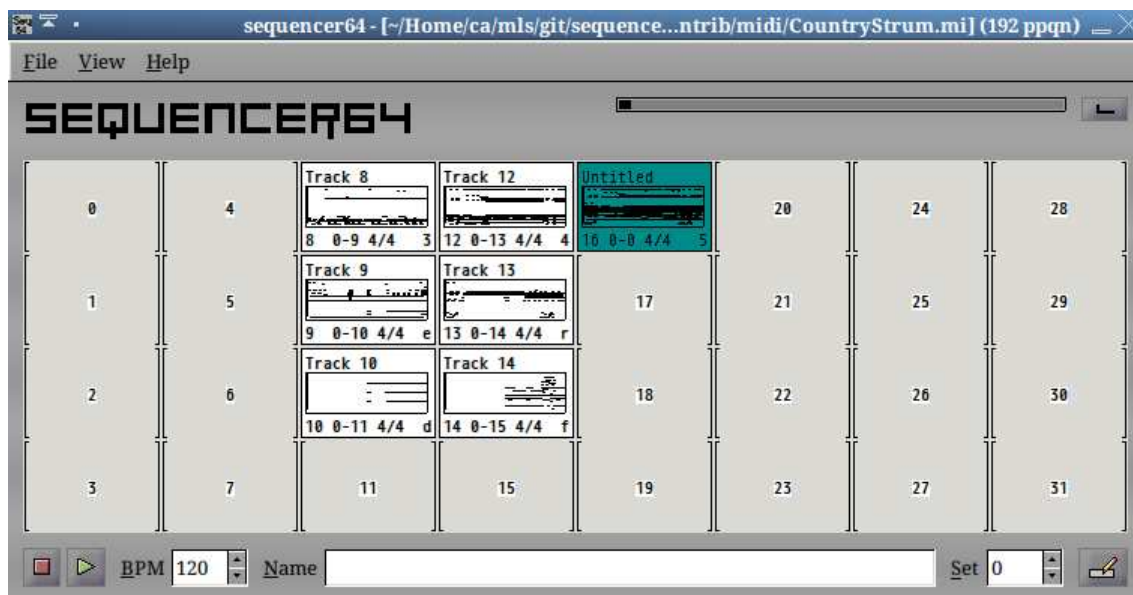


Figure 104: Imported SMF 0 MIDI Song

The original imported SMF 0 track is preserved, intact, in main window pattern slot #16. It is highlighted in a dark cyan color to remind the user that it is not a normal, playable *Sequencer64* sequence. It has no channel number. It is assigned the non-existent MIDI channel of 0. If the original track had no title, this track is named "Untitled". Normally, one will either delete this track before saving the file, or at least keep it muted.

Each new, single-channel track is given a title of either the form "N: Track-name" or, if the song was untitled, "Track N". The sequence number of each new track is the internal channel number (which is always the actual MIDI channel number minus one).

The time-signature of each track is currently set to defaults, unless a time-signature event is encountered in the imported file.

New: *Sequencer64* adds support for obtaining some of the other information a MIDI SMF 0 track might have, such as the Tempo and the Time Signature. It also now will save this information in the first track of the MIDI file.

The original SMF 0 track is also shown in the song editor, as shown in the following figure.

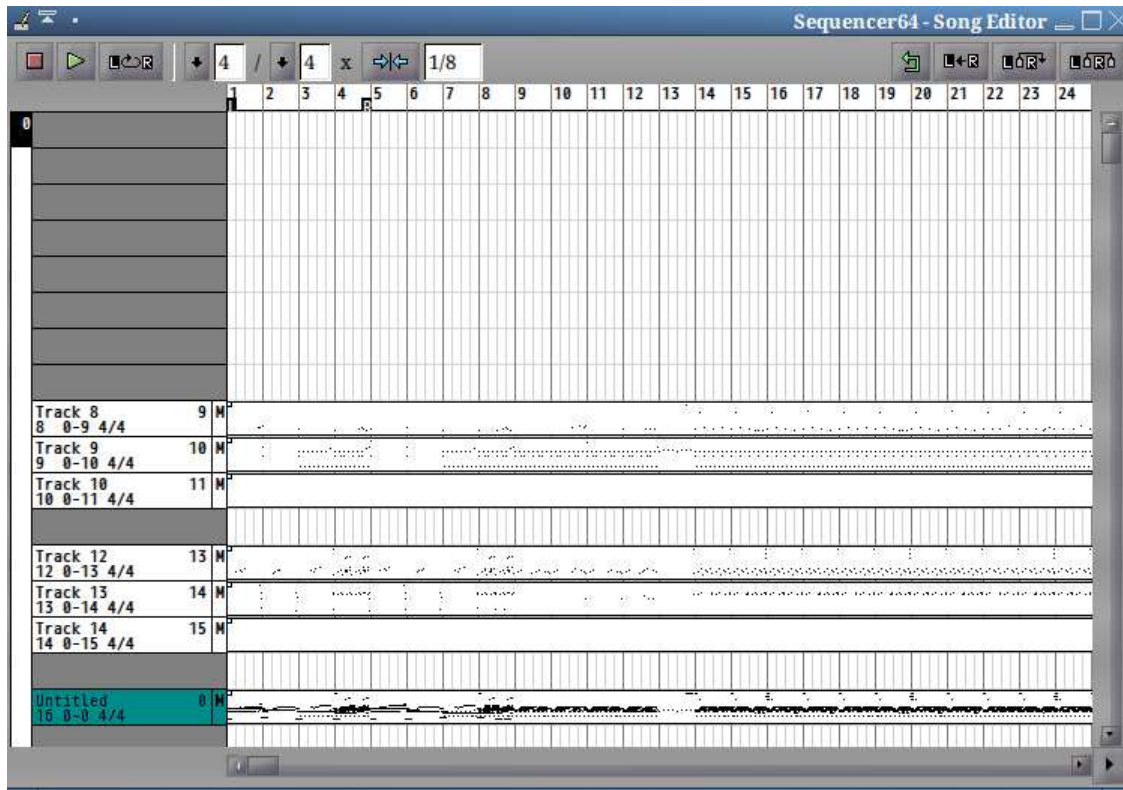


Figure 105: SMF 0 MIDI Song in the Song Editor

One is free to edit the imported tune to heart's content. Here, we added one instance of each track, including the SMF 0 track, to show what the imported song looks like.

15.2 Legacy Proprietary Track Format

The authors of *Seq24* took the trouble to make sure that the format of the MIDI files it write are compatible with other MIDI applications. *Seq24* also stores its own information (triggers, MIDI control information, etc) in the file, but marked so that other sequencers can read the file and ignore the *Seq24*-specific information.

Sequencer64 continues that MIDI-compliant behavior, but has improved the compliance just a little bit. We call that last chunk of sequencer-specific information the "proprietary track". Before we discuss that last, proprietary track, note that the normal MIDI tracks that precede it include the SeqSpec ("sequencer-specific", sort of) control tags shown in table 7 "[SeqSpec Items in Normal Tracks](#)" on page 173. These control tags are global constants in the *Seq24* source code, ranging from 0x24240001 to 0x24240013.

The `c_triggers` tag is obsolete.

New: The `c_musickey`, `c_musicscale`, and `c_backsequence` control tags are new with *Sequencer64* version 0.9.9.7 and above. They are now saved as additional information in each sequence in which they have been specified in the sequence editor. However, for backward compatibility (and because it is probably the more common use case), these items can also be saved globally for the whole MIDI song, as an option.

Table 7: SeqSpec Items in Normal Tracks

<code>c_midibus</code>	24 24 00 01 00 00 00 00
<code>c_midich</code>	24 24 00 02 00 00 00 00
<code>c_triggers</code>	24 24 00 04 00 00 00 00
<code>c_timesig</code>	24 24 00 06 00 00 00 00
<code>c_triggers_new</code>	24 24 00 08 00 00 00 00
<code>c_musickey</code>	24 24 00 11 00
<code>c_musicscale</code>	24 24 00 12 00
<code>c_backsequence</code>	24 24 00 13 00 00 00 00

Note that these tags (created by the application, but not present in the proprietary track, and perhaps also created by other MIDI applications) are preceded by the standard MIDI "FF 7F length" meta-event sequence.

The following discussion applies to the final "proprietary" track as saved in the legacy *Seq24* format.

After all the counted MIDI tracks are read, *Seq24* checks for extra data. If there is extra data, *Seq24* reads a long value. The first one encountered is a MIDI "sequencer-specific" (*SeqSpec*) section. It starts with

```
0x24240010 == a Seq24 c_midictrl proprietary value
```

Getting this value first is simplified MIDI in two ways. First, the second does not begin with any kind of track marker. MIDI requires an "MTrk" marker to start a track, though it also requires unknown markers to be supported. Some applications, like *timidity*, handle this situation. Others, like *midicvt*, complain about an unexpected header marker. Second, normally, MIDI wants to see the triad of

```
status = FF, type= 7F (proprietary), length = whatever
```

to precede proprietary data. Now, as shown by table 11 "Application Support for MIDI Files" on page 177, most applications accept the shortcut legacy format, but *midicvt* does not.

So, as a "bug" fix, we now write and read this information properly in *Sequencer64*; it is now preceded by the `0xFF 0x7F` marker.. We also need to be able to read legacy *Seq24* MIDI files, so that ability has been preserved in *Sequencer64*..

Anyway, at this point, we have the `c_midictrl` information now. Next, we read a long value, seqs. It is 0.

```
24 24 00 10 00 00 00 00
```

Read the next long value, `0x24240003`. This is `c_midiclocks`. We get a value of 0 for "TrackLength" (now a local variable called "busscount"):

```
24 24 00 03 00 00 00 00
```

If the buss-count was greater than 0, then for each value, we would read a byte value represent the bus a clock was on, and setting the clock value of the master MIDI buss. Another check for more data is made.

```
24 24 00 05 00 20 00 00
```

0x24240005 is **c_notes**. The value screen_sets is read (two bytes) and here is 0x20 = 32. For each screen-set:

```
len = read\_short()
```

If non-zero, each of the **len** bytes is appended as a string. Here, len is 0 for all 32 screensets, so the screen-set notepad is set to an empty string. Another check for more data is made.

```
24 24 00 07 00 00 00 78
```

0x24240007 is **c_bpmtag**. The long value is read and sets the perform object's bpm value. Here, it is 120 bpm. Another check for more data is made.

```
24 24 00 09 00 00 04 00
```

0x24240009 is **c_mutegroups**. The long value obtained here is 1024. If this value is not equal to the constant **c_gmute_tracks** (1024), a warning is emitted to the console, but processing continues anyway, 32 x 32 long values are read to select the given group-mute, and then set each of its 32 group-mute-states.

In our sample file, 32 groups are specified, but all 32 group-mute-state values for each are 0.

So, to summarize the legacy proprietary track's data, ignoring the data itself, which is mostly 0 values, as shown in table 8 "[SeqSpec Items in Legacy Proprietary Track](#)" on page 174

Table 8: SeqSpec Items in Legacy Proprietary Track

c_midictrl	24 24 00 10 00 00 00 00
c_midiclocks	24 24 00 03 00 00 00 00 (buss count = 0)
c_notes	24 24 00 05 00 20 00 00 (screen sets = 32)
c_bpmtag	24 24 00 07 00 00 00 78 (bpm = 120)
c_mutegroups	24 24 00 09 00 00 04 00 (mg = 1024)

The new format (again, ignoring the data) takes up a few more bytes. It starts with the normal track marker and size data, followed by a made-up track name ("Sequencer64-S"), as shown in table 9 "[SeqSpec Items in New Proprietary Track](#)" on page 175.

For the new format, the components of the final proprietary track size are as shown here:

1. **Delta time.** 1 byte, always 0x00.
2. **Sequence number.** 5 bytes. OPTIONAL.

Table 9: SeqSpec Items in New Proprietary Track

"MTrk" etc.	4d 54 72 6b 00 00 11 0d 00 ...
Track name	53 65 71 75 65 6e 63 65 72 32 34 2d 53
c_midictrl	ff 7f 04 24 24 00 10 00 (???)
c_midiclocks	ff 7f 04 24 24 00 03 00 (buss count = 0)
c_notes	ff 7f 46 24 24 00 05 00 20 00... (screen sets = 32)
c_bpmtag	ff 7f 08 24 24 00 07 00 00 00 78 (bpm = 120)
c_mutegroups	ff 7f a1 08 24 24 00 09 00 00 04 00... (mg = 1024)

3. **Track name.** 3 + 10 or 3 + 15

4. **Series of proprietary specs:**

- **Prop header:**

- If legacy format, 4 bytes.
- Otherwise, 2 bytes + `varinum_size(length) + 4` bytes.
- Length of the prop data.

5. **Track End.** 3 bytes.

15.3 MIDI Information

This section provides some useful, basic information about MIDI data.

15.3.1 MIDI Variable-Length Value

A variable-length value (VLV) is a quantity that uses additional bytes and continuation bits to encode large numbers without confusing a MIDI interpreter. See https://en.wikipedia.org/wiki/Variable-length_quantity.

The length of a variable length value obviously depends on the value it represents. Here is a simple list of the numbers that can be represented by a VLV:

- 1 byte: 0x00 to 0x7F
- 2 bytes: 0x80 to 0x3FFF
- 3 bytes: 0x4000 to 0x001FFFFF
- 4 bytes: 0x200000 to 0x0FFFFFFF

15.3.2 MIDI Track Chunk

Track chunk == MTrk + length + track_event [+ track_event ...]

- *MTrk* is 4 bytes representing the literal string "MTrk". This marks the beginning of a track.
- *length* is 4 bytes the number of bytes in the track chunk following this number. That is, the marker and length are not counted in the length value.
- *track_event* denotes a sequenced track event; usually there are many track events in a track. However, some of the events may simply be informational, and not modify the audio output.

Table 10: MIDI Meta Event Types

Type	Event
0x00	Sequence number
0x01	Text event
0x02	Copyright notice
0x03	Sequence or track name
0x04	Instrument name
0x05	Lyric text
0x06	Marker text
0x07	Cue point
0x20	MIDI channel prefix assignment
0x2F	End of track
0x51	Tempo setting
0x54	SMPTE offset
0x58	Time Signature
0x59	Key Signature
0x7F	Sequencer-Specific event

A track event consists of a delta-time since the last event, and one of three types of events.

```
track_event = v_time + midi_event | meta_event | sysex_event
```

- *v_time* is the variable length value for elapsed time (delta time) from the previous event to this event.
- *midi_event* is any MIDI channel message such as note-on or note-off.
- *meta_event* is an SMF meta event.
- *sysex_event* is an SMF system exclusive event.

15.3.3 MIDI Meta Events

Meta events are non-MIDI data of various sorts consisting of a fixed prefix, type indicator, a length field, and actual event data..

```
meta_event = 0xFF + meta_type + v_length + event_data_bytes
```

- *meta_type* is 1 byte, expressing one of the meta event types shown in the table that follows this list.
- *v_length* is length of meta event data, a variable length value.
- *event_data_bytes* is the actual event data.

Timidity reads the legacy and new formats and plays the tune. *Sequencer64* saves the "b4uacuse" tune out, in both formats, with a "MIDI divisions" value of 192, versus its original value of 120. The song plays a little bit faster after this conversion.

The *midicvt* application does not read the legacy *Seq24* file format. It expects to see the MTrk marker. Even if the *midicvt* `--ignore` option is provided, *midicvt* does not like the legacy *Seq24* format, and ends with an error message. However, as shown by table 11 "Application Support for MIDI Files" on page 177, most applications are more forgiving, and can read (or ignore) the legacy format. The *gsequencer* application has some major issues in our installation, but it is probably our setup. (No JACK running?)

Table 11: Application Support for MIDI Files

Application	Legacy	New	Original File
ardour	TBD	TBD	TBD
composite	TBD	TBD	TBD
gsequencer	No	No	No
lmms	Yes	Yes	Yes
midi2ly	Yes	Yes	TBD
midicvt	No	Yes	Yes
midish	TBD	TBD	TBD
muse	TBD	TBD	TBD
playmidi	TBD	TBD	TBD
pmidi	TBD	TBD	TBD
qtractor	Yes	Yes	Yes
rosegarden	Yes	Yes	Yes
superlooper	TBD	TBD	TBD
timidity	Yes	Yes	Yes

15.4 More MIDI Information

This section goes into even more detail about the MIDI format, especially as it applies to the processing done by *Sequencer64*. The following sub-sections describe how *Sequencer64* parses a MIDI file.

15.4.1 MIDI File Header, MThd

The first thing in a MIDI file is The data of the header:

Header ID:	"MThd"	4 bytes
MThd length:	6	4 bytes
Format:	0, 1, 2	2 bytes
No. of track:	1 or more	2 bytes
PPQN:	192	2 bytes

The header ID and it's length are always the same values. The formats that Sequencer64 supports are 0 or 1. SMF 0 has only one track, while SMF 1 can support an arbitrary number of tracks. The last value in the header is the PPQN value, which specifies the "pulses per quarter note", which is the basic time-resolution of events in the MIDI file. Common values are 96 or 192, but higher values are also common. Sequencer64 and its precursor, Seq24, default to 192.

15.4.2 MIDI Track, MTrk

The next part of the MIDI file consists of the tracks specified in the file. In SMF 1 format, each track is assumed to cover a different MIDI channel, but always the same MIDI buss. (The MIDI buss is not a data item in standard MIDI files, but it is a special data item in the sequencer-specific section of *Seq24/Sequencer64* MIDI files.) Each track is tagged by a standard chunk marker, "MTrk". Other

markers are possible, and are to be ignored, if nothing else. Here are the values read at the beginning of a track:

Track ID:	"MTrk"	4 bytes
Track length:	varies	4 bytes

The track length is the number of bytes that need to be read in order to get all of the data in the track.

Delta time. The amount time that passes from one event to the next is the *delta time*. For some events, the time doesn't matter, and is set to 0. This value is a *variable length value*, also known as a "VLV" or a "varinum". It provides a way of encoding arbitrarily large values, a byte at a time.

Delta time:	varies	1 or more bytes
-------------	--------	-----------------

The running-time accumulator is incremented by the delta-time. The current time is adjusted as per the PPQN ratio, if needed, and passed along.

15.4.3 Channel Events

Status. The byte after the delta time is examined by masking it against 0x80 to check the high bit. If not set, it is a "running status", it is replaced with the "last status", which is 0 at first.

Status byte:	varies	1 byte
--------------	--------	--------

If the high bit is set, it is a status byte. What does the status mean? To find out, the channel part of the status is masked out using the 0xF0 mask. If it is a 2-data-byte event (note on, note off, aftertouch, control-change, or pitch-wheel), then the two data bytes are read:

Data byte 0:	varies	1 byte
Data byte 1:	varies	1 byte

If the status is a Note On event, with velocity = data[1] = 0, then it is converted to a Note Off event, a fix for the output quirks of some MIDI devices. If it is a 1-data-byte event (Program Change or Channel Pressure), then only data byte 0 is read. The one or two data bytes are added to the event, the event is added to the current sequence, and the MIDI channel of the sequence is set.

15.4.4 Meta Events Revisited

If the event status masks off to 0xF0 (0xF0 to 0xFF), then it is a Meta event. If the Meta event byte is 0xFF, it is called a "Sequencer-specific", or "SeqSpec" event. For this kind of event, then a type byte and the length of the event are read.

Meta type:	varies	1 byte
Meta length:	varies	1 or more bytes

If the type of the SeqSpec (0xFF) meta event is 0x7F, parsing checks to see if it is one of the Seq24 "proprietary" events. These events are tagged with various values that mask off to 0x24240000. The parser reads the tag:

Prop tag:	0x242400nn	4 bytes
-----------	------------	---------

These tags provide a way to save and recover Seq24/Sequencer64 properties from the MIDI file: MIDI buss, MIDI channel, time signature, sequence triggers, and (new), the key, scale, and background sequence to use with the track/sequence. Any leftover data for the tagged event is let go. Unknown tags are skipped.

If the type of the SeqSpec (0xFF) meta event is 0x2F, then it is the End-of-Track marker. The current time marks the length (in MIDI pulses) of the sequence. Parsing is done for that track.

If the type of the SeqSpec (0xFF) meta event is 0x03, then it is the sequence name. The "length" number of bytes are read, and loaded as the sequence name.

If the type of the SeqSpec (0xFF) meta event is 0x00, then it is the sequence number, which is read:

Seq number:	varies	2 bytes
-------------	--------	---------

Note that the sequence number might be modified latter to account for the current *Seq24* screenset in force for a file import operation.

Anything other SeqSpec type is simply skipped by reading the "length" number of bytes.

The remaining sections simply describe MIDI meta events in more detail, for reference.

15.5 Meta Events

Here, we summarize the MIDI meta events.

1. FF 00 02 ssss: Sequence Number.
2. FF 01 len text: Text Event.
3. FF 02 len text: Copyright Notice.
4. FF 03 len text: Sequence/Track Name.
5. FF 04 len text: Instrument Name.
6. FF 05 len text: Lyric.
7. FF 06 len text: Marker.
8. FF 07 len text: Cue Point.
9. FF 08 through 0F len text: Other kinds of text events.
10. FF 2F 00: End of Track.
11. FF 51 03 tttttt: Set Tempo, us/qn.
12. FF 54 05 hr mn se fr ff: SMPTE Offset.
13. FF 58 04 nn dd cc bb: Time Signature.

14. FF 59 02 sf mi: Key Signature.
15. FF 7F len data: Sequencer-Specific.
16. FF F0 len data F7: System-Exclusive

The next sections describe the events that *Sequencer* tries to handle. These are:

- Sequence Number (0x00)
- Track Name (0x03)
- End-of-Track (0x2F)
- Set Tempo (0x51) (Sequencer64 only)
- Time Signature (0x58) (Sequencer64 only)
- Sequencer-Specific (0x7F) (Handled differently in Sequencer64)
- System Exclusive (0xF0) Sort of handled, functionality incomplete.

15.5.1 Sequence Number (0x00)

FF 00 02 ss ss

This optional event must occur at the beginning of a track, before any non-zero delta-times, and before any transmittable MIDI events. It specifies the number of a sequence.

15.5.2 Track/Sequence Name (0x03)

FF 03 len text

If in a format 0 track, or the first track in a format 1 file, the name of the sequence. Otherwise, the name of the track.

15.5.3 End of Track (0x2F)

FF 2F 00

This event is not optional. It is included so that an exact ending point may be specified for the track, so that it has an exact length, which is necessary for tracks which are looped or concatenated.

15.5.4 Set Tempo Event (0x51)

The MIDI Set Tempo meta event sets the tempo of a MIDI sequence in terms of the microseconds per quarter note. This is a meta message, so this event is never sent over MIDI ports to a MIDI device. After the delta time, this event consists of six bytes of data:

FF 51 03 tt tt tt

Example:

```
FF 51 03 07 A1 20
```

1. 0xFF is the status byte that indicates this is a Meta event.
2. 0x51 the meta event type that signifies this is a Set Tempo event.
3. 0x03 is the length of the event, always 3 bytes.
4. The remaining three bytes carry the number of microseconds per quarter note. For example, the three bytes above form the hexadecimal value 0x07A120 (500000 decimal), which means that there are 500,000 microseconds per quarter note.

Since there are 60,000,000 microseconds per minute, the event above translates to: set the tempo to $60,000,000 / 500,000 = 120$ quarter notes per minute (120 beats per minute).

This event normally appears in the first track. If not, the default tempo is 120 beats per minute. This event is important if the MIDI time division is specified in "pulses per quarter note", which does not itself define the length of the quarter note. The length of the quarter note is then determined by the Set Tempo meta event.

Representing tempos as time per beat instead of beat per time allows absolutely exact DWORD-term synchronization with a time-based sync protocol such as SMPTE time code or MIDI time code. This amount of accuracy in the tempo resolution allows a four-minute piece at 120 beats per minute to be accurate within 500 usec at the end of the piece.

15.5.5 Time Signature Event (0x58)

After the delta time, this event consists of seven bytes of data:

```
FF 58 04 nn dd cc bb
```

The time signature is expressed as four numbers. **nn** and **dd** represent the numerator and denominator of the time signature as it would be notated. The denominator is a negative power of two: 2 represents a quarter-note, 3 represents an eighth-note, etc. The **cc** parameter expresses the number of MIDI clocks in a metronome click. The **bb** parameter expresses the number of notated 32nd-notes in a MIDI quarter-note (24 MIDI Clocks).

Example:

```
FF 58 04 04 02 18 08
```

1. 0xFF is the status byte that indicates this is a Meta event.
2. 0x58 the meta event type that signifies this is a Time Signature event.
3. 0x04 is the length of the event, always 4 bytes.
4. 0x04 is the numerator of the time signature, and ranges from 0x00 to 0xFF.
5. 0x02 is the log base 2 of the denominator, and is the power to which 2 must be raised to get the denominator. Here, the denominator is 2 to 0x02, or 4, so the time signature is 4/4.

6. 0x18 is the metronome pulse in terms of the number of MIDI clock ticks per click. Assuming 24 MIDI clocks per quarter note, the value here (0x18 = 24) indicates that the metronome will tick every 24/24 quarter note. If the value of the sixth byte were 0x30 = 48, the metronome clicks every two quarter notes, i.e. every half-note.
7. 0x08 defines the number of 32nd notes per beat. This byte is usually 8 as there is usually one quarter note per beat, and one quarter note contains eight 32nd notes.

If a time signature event is not present in a MIDI sequence, a 4/4 signature is assumed.

In *Sequencer64*, the `c_timesig` SeqSpec event is given priority. The conventional time signature is used only if the `c_timesig` SeqSpec is not present in the file.

15.5.6 SysEx Event (0xF0)

If the meta event status value is 0xF0, it is called a "System-exclusive", or "SysEx" event.

Sequencer64 has some code in place to store these messages, but the data is currently not actually stored or used. Although there is some infrastructure to support storing the SysEx event within a sequence, the SysEx information is simply skipped. *Sequencer64* warns if the terminating 0xF7 SysEx terminator is not found at the expected length. Also, some malformed SysEx events have been encountered, and those are detected and skipped as well.

15.5.7 Sequencer Specific (0x7F)

This data, also known as SeqSpec data, provides a way to encode information that a specific sequencer application needs, while marking it so that other sequences can safely ignore the information.

FF 7F len data

In *Seq24* and *Sequencer64*, the data portion starts with four bytes that indicate the kind of data for a particular SeqSpec event:

<code>c_midibus</code>	^	0x24240001	Track buss number
<code>c_midich</code>	^	0x24240002	Track channel number
<code>c_midiclocks</code>	*	0x24240003	Track clocking
<code>c_triggers</code>	^	0x24240004	See <code>c_triggers_new</code>
<code>c_notes</code>	*	0x24240005	Song data, notes
<code>c_timesig</code>	^	0x24240006	Track time signature
<code>c_bpmtag</code>	*	0x24240007	Song beats/minute
<code>c_triggers_new</code>	^	0x24240008	Track trigger data
<code>c_mutegroups</code>	*	0x24240009	Song mute group data
<code>c_midictrl</code>	*	0x24240010	Song MIDI control
<code>c_musickey</code>	+	0x24240011	Track key (<i>Sequencer64</i> only)
<code>c_musicscale</code>	+	0x24240012	Track scale (<i>Sequencer64</i> only)
<code>c_backsequence</code>	+	0x24240013	Track background sequence (<i>Sequencer64</i> only)

* = global only; ^ = track only; + = both

In *Seq24*, these events are placed at the end of the song, but are not marked as SeqSpec data. Most MIDI applications handle this situation fine, but some (e.g. *midicvt*) do not. Therefore, *Sequencer64* makes sure to wrap each data item in the 0xFF 0x7F wrapper.

Also, the last three items above (key, scale, and background sequence) can also be stored (by *Sequencer64*) with a particular sequence/track, as well as at the end of the song. Not sure if this bit of extra flexibility is useful, but it is there.

15.5.8 Non-Specific End of Sequence

Any other statuses are deemed unsupportable in *Sequencer64*, and abort parsing with an error.

If the `-bus` option is in force, it overrides the buss number (if any) stored with the sequence. This option is useful for testing a setup. Note that it also applies to new sequences.

At the end, *Sequencer64* adds the sequence to the encoded tune.

16 Sequencer64 JACK Support

This section describes some details concerning the JACK support of *Sequencer64*. As with *Seq24*, *Sequencer64* has JACK transport support. But, if one wants to use the older version of *Sequencer64* (versions 0.9.x) with JACK MIDI, one needs to expose the ALSA ports to JACK using `a2jmidid --export-hw` and connect the resultant MIDI JACK ports oneself, using *QJackCtl*, for example.

To enable the JACK transport support at run-time, the options `-j/--jack-transport`, `-J/--jack-master`, and `-C/--jack-master-cond` are available.

With version 0.90, *Sequencer64* can be built to support the legacy ALSA interface, the PortMIDI interface, or, best of all, the native JACK MIDI interface, loosely based on the RtMIDI project (see [18]). This mode also supports fallback-to-ALSA if the JACK server is not running.

- *Sequencer64*. . This application is built when the `--enable-alsamidi` option is specified at "configure" time. It is basically the 0.9.x version of *Sequencer64* application. However, this build is no longer the default.
- *seq64*. . This application is built when the `--enable-rtmidi` option is specified at "configure" time. This build is now the default build.
- *seq64portmidi*. . This application is built when the `--enable-portmidi` option is specified at "configure" time. This build is *deprecated*. It works with Linux, but, for Windows support, we will instead add Windows API calls to the "rtmidi" build of the project. We won't discuss this version at all. We've tested it for playback, but nothing else.

The following sections discuss the JACK transport support and the native JACK MIDI support.

16.1 Sequencer64 JACK Transport

This section is just underway. Here are some of the topics to be discussed:

1. What JACK functions are supported for JACK Transport.
2. Exposing the ALSA MIDI ports to JACK, when using the legacy ALSA version of *Sequencer64*.

3. Fixes to JACK Master mode.
4. Interactions with the Klick and Hydrogen applications.
5. Patches from the new (!) version of Seq24, 0.9.3, to correct for MIDI Clock drift over long durations.

In the meantime, the text files in the project's `contrib/notes` directory provide some useful setup notes.

JACK transport support is *separate* from native JACK MIDI support. The JACK transport client is an invisible client with the name "seq64-transport", while the JACK MIDI client is visible in *QJackCtl*, and the ports created are part of the "seq64" client.

The first thing to note about JACK transport with *Sequencer64* is that the progress bars will not move unless *Sequencer64* is connected to a JACK client, such as *Hydrogen* (in JACK MIDI mode) or *Yoshimi*. Currently, *Sequencer64* will connect to a JACK client automatically only at startup, where it will connect to all JACK clients that it finds. If it can't find a JACK client, then it will fail to register a JACK port, and cannot play.

The second thing is that *Sequencer64* still has the issue where it must be JACK Master to follow transport. More on this issue later.

16.2 Sequencer64 Native JACK MIDI

This section discusses the new *seq64* application, which supports native JACK MIDI. It is now the *official* version of *Sequencer64*, and new bugs will be fixed mainly in this version.

The first thing to note about *seq64* is that it supports both ALSA and JACK MIDI. If one runs it to support JACK, and JACK is not present, then *seq64* falls back to ALSA support.

To run *seq64* to support JACK, for now, one must add the `-t` or `--jack-midi` option. Why `-t`? We are running out of option letters. And eventually we will make the `-t` option the default. If *Sequencer64* (in its native JACK mode, using the `-t` or `--jack-midi` option) is run in JACK mode *without JACK running* on the system, it will take awhile to come up (in ALSA mode). If run from the console, one will see:

```
$ ./Seq64rtmidi/seq64 -t
[Activating native JACK MIDI]
[Reading rc configuration /home/ahlstrom/.config/sequencer64/sequencer64.rc]
[Reading user configuration /home/ahlstrom/.config/sequencer64/sequencer64.usr]
[Activating native JACK MIDI]
Cannot connect to server socket err = No such file or directory
Cannot connect to server request channel
jack server is not running or cannot be started
. . .
[JACK server not running?]
connect: JACK server not running?
rtmidi_info: no compiled support for specified API      (???)
[Initialized, running without JACK sync]
9 rtmidi ports created:
Input ports (3):
[0] 0:1 system:announce (system)
[1] 14:0 Midi Through:Midi Through Port-0
```

```
[2] 24:0 nanoKEY2:nanoKEY2 MIDI 1
Output ports (6):
[0] 14:0 Midi Through:Midi Through Port-0
[1] 24:0 nanoKEY2:nanoKEY2 MIDI 1
[2] 128:0 TiMidity:TiMidity port 0
[3] 128:1 TiMidity:TiMidity port 1
[4] 128:2 TiMidity:TiMidity port 2
[5] 128:3 TiMidity:TiMidity port 3
```

To enable native JACK MIDI, use the `-t/--jack-midi` options. When enabled, the "transport" button in the main window will show the word "JACK" (no matter whether JACK transport is also enabled or not). Please note that, if you select the JACK-MIDI option and JACK is not available, *seq64* will start in ALSA mode and *it will save that mode when exiting*.

The JACK (`-t`) and ALSA (`-A`) options are sticky options. That is, they are saved to the "rc" configuration file at exit, so one does not have to specify them in subsequent *seq64* sessions.

16.2.1 Sequencer64 JACK MIDI Output

By default (or depending on the "rc" configuration file), the new *seq64* version of *Sequencer64* will automatically connect the ports that it finds to *seq64*, as shown in the following figure:

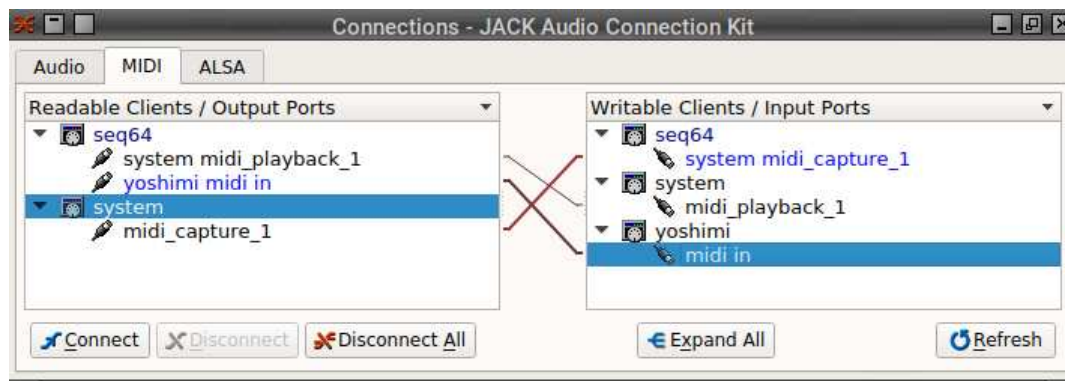


Figure 106: JACK MIDI Ports and Auto-Connect

The `seq64:system midi_playback_1` output port shown in the left panel is created by *seq64*. It connects it to the `system:midi_playback_1` port in the right panel, which is actually the input for the *Korg nanoKEY2* controller. ALSA detects the real name of this USB MIDI device, but JACK does not. Thus, the MIDI tab shows the "system" name of the USB MIDI port, while the ALSA tab does show the name.



Figure 107: ALSA MIDI Ports

Note that the input connection is not useful unless `seq64` could send setup information to the `nanoKEY2`. Korg provides a configuration application for *Windows*. For *Linux*, a Python application called *Nano-Basket* ([16]) is available.

More useful is the automatic connection between `seq64:yoshimi midi in` in the left (output) panel and `yoshimi:midi in` in the right (input) panel. With it it, *Sequencer64* patterns with the proper output-buss setting can play to the *Yoshimi* software synthesizer.

The output ports available are shown in *seq64*'s **File / Options / MIDI Clock** tab, shown here:



Figure 108: JACK MIDI Ports in Seq64

Note that the index, client, and buss numbers are all the same. There's actually a bug here, since all `seq64` ports should have the same client number. However, in JACK, clients and ports are referred to by name, not number, and so functionality is not affected.

Entry 0 (`seq64:system midi_playback_1`) is, as already noted, not useful unless the `nanoKEY2` can accept input control. Entry 1 allows `seq64` to send MIDI to *Yoshimi*. A pattern must specify output buss 1 in order for the MIDI to reach *Yoshimi*. Another option, normally for testing only, is to specify the "bus" option on the command line:

```
$ seq64 --jack-midi --bus 1
```

With that option, all patterns send to buss 1.

16.2.2 Sequencer64 JACK MIDI Input

One more connection to note is the input connection to `seq64`. Referring back to figure 106 ”[JACK MIDI Ports and Auto-Connect](#)” on page 185 we see that `system:midi_capture_1` in the left (output) panel is connected to `seq64:system midi_capture_1` in the right (input) panel. This allows the *nanoKEY2* MIDI output port to feed `seq64`, which can then record the input notes, and also forward them to *Yoshimi* so that they can be heard.

This input port is also shown in the **File / Options / MIDI Input** tab, shown here:

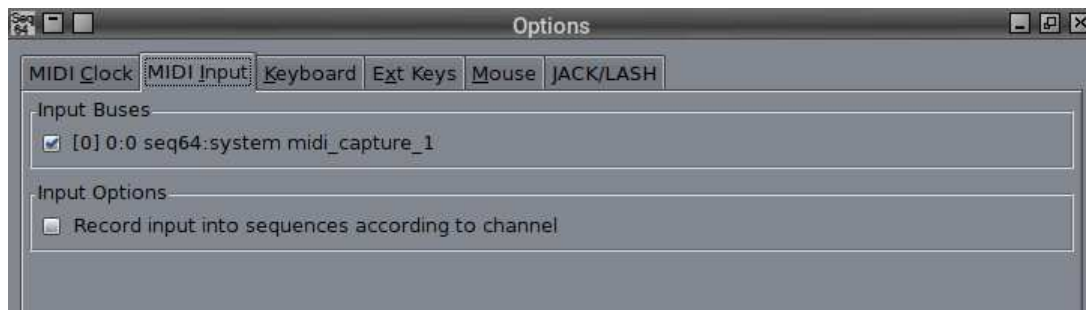


Figure 109: JACK MIDI Input Ports

When the check-box for that buss is selected, the input can be captured by `seq64`.

16.2.3 Sequencer64 JACK MIDI Virtual Ports

The manual-versus-normal port support for JACK MIDI is essentially the same as that for ALSA. Currently, the same option name is used (we will provide a more generic option-name soon). The `-m/--manual-alsa-ports` option actually provides what are known as ”virtual” ports. These are ports that do not represent hardware, but are created by applications to allow them to connect to other applications or MIDI devices.

The difference between manual/virtual ports and normal ports is that, while normal ports are automatically connected to the remote ports that exist in the system, the manual/virtual ports are just created, and one must manually connect them via, for example, the *QJackCtl* connections dialog.

So, if one wants `seq64` to automatically connect to all existing JACK MIDI ports, *do not* use the `-m/--manual-alsa-ports` option... use the `-a/--auto-alsa-ports` option. Both options apply to both ALSA and JACK, but we do not want to change the option-names at this time.

If one wants the freedom to make the connections oneself, or with a session manager, then use the manual/virtual option. Here are the ports created in manual/virtual mode:

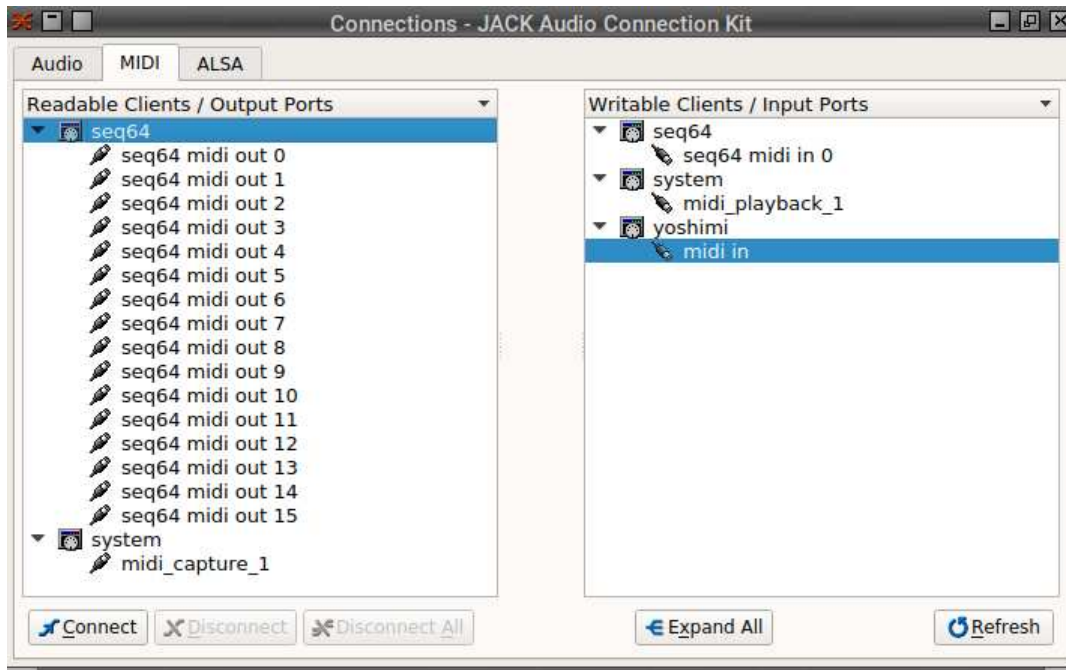


Figure 110: JACK MIDI Manual Ports

One sees that `seq64` creates 16 output ports (busses), and one input port (buss). One also sees that `seq64` *does not* connect the ports automatically. The user or the session manager will have to make those connections.

The **MIDI Clock** and **MIDI Input** tabs reflect in an obvious manner what is seen in *QJackCtl*, so we won't bother to show those tabs.

16.2.4 Sequencer64 JACK MIDI and a2jmidid

One more thing to show is that `seq64` can deal with the odd naming of JACK ports created by the *a2jmidid* application.

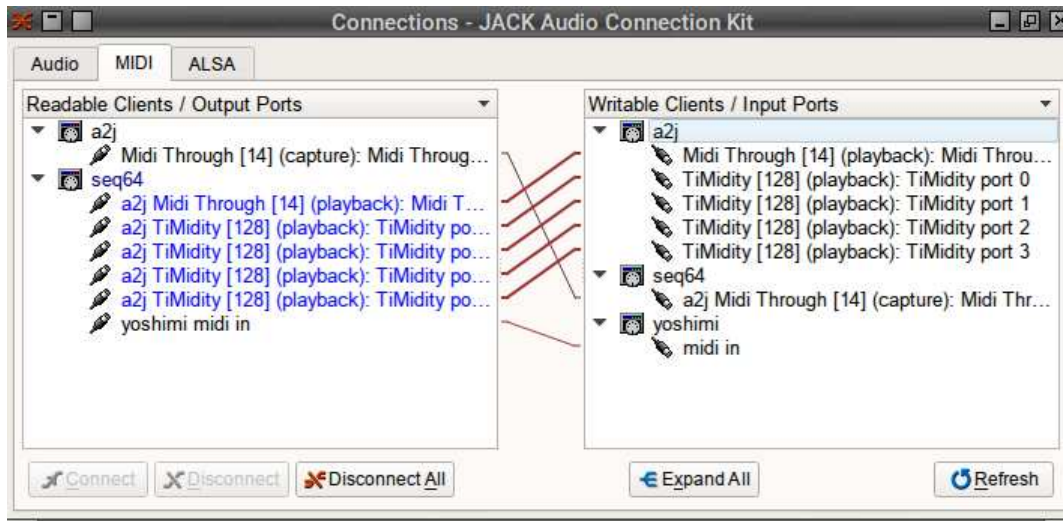


Figure 111: JACK MIDI a2jmidid Ports

One can see in the right (input) panel that the `a2j` client creates 5 entries, one for "Midi Through", and four for the `TiMidity` client. In the left (output) panel, one sees (in blue) the output ports that `seq64` creates to connect to the ports created by `a2jmidid`.

Also note the true JACK output port, `seq64:yoshimi midi in` to connect to the input port `yoshimi:midi in`.

Again, if these automatic connections get in the way, run `seq64` in manual/virtual mode.

When recording, do not forget the step option. If one paints notes with the mouse, the note is previewed, and the note position advances with each click. If one paints notes via an external MIDI keyboard, the notes are painted and advanced, but they are not previewed. To preview them, click the "pass MIDI in to output" button in the pattern editor window to activate so that they will be passed to your sound generator. Be careful of MIDI loops!

17 Kudos

This section gives some credit where credit is due. We have contributors to acknowledge, and have not caught up with all the people who have helped this project:

- *Tim Deagan (tdeagan)*: fixes to the mute-group support.
- *Orel*: an important fix to add and relink notes after a paste action in the pattern editor.
- *arnaud-jacquemin*: a bug report and fix for a regression in mute-groups support.
- *Stan Preston (stazed)*: ideas for some upcoming improvements based on his `seq32` project. A lot of ideas. And a lot of code!
- *Animtim*: a number of bug reports and a new logo.
- *jean-emmanuel*: scrollable main-window support, other features and reports.
- *Olivier Humbert (trebmuh)*: French translation for the desktop files.
- *Oli Kester*: The creator of `Kepler34`, from which we are getting clues on porting the user interface to Qt 5 and Windows.

Also some bug-reporters and testers:

- *F0rth*: a request for scripting support, a possible future feature.
- *gimmeapill*: testing, bug-reports, and, um, "marketing".
- *georgkrause*: a number of helpful bug reports.
- *goguetchapuisb*: found that Seq64 native JACK did not properly handle the copious Active Sensing messages emitted by Yamaha keyboards.
- *milkmiruku*: mainwids issues and ideas.
- *muranyia*: feature request for numbered piano keys and bug-reports.
- *pixelrust*: reports of issues with "fruity" interaction.
- *simonvanderveldt*: issues with window sizing and more.
- *ssj71*: a request for an LV2 plugin version, a possible future feature.
- *triss*: a request for OSC support, a possible future feature.
- *layk*: some bug reports, and, we are pretty sure, some nice videos that demonstrate *Sequencer64* on *YouTube*. See [10].

... and there are more to add to this list....

There are a number of authors of *Seq24*. ideas from other *Seq24* fans), and some deep history, as one can see in figure 25 "Help Credits" on page 40, and in figure 26 "Help Documentation" on page 40. All of these authors, and more, have contributed to *Sequencer64*, whether they know it or not. The original author is Rob C. Buse; where the word "I" occurs, that is probably him. Without his work, we would never have started *Sequencer64*.

From the original author:

Seq24 is a real-time MIDI sequencer. It was created to provide a very simple interface for editing and playing MIDI 'loops'. After searching for a software based sequencer that would provide the functionality needed for a live performance, there was little found in the software realm. I set out to create a very minimal sequencer that excludes the bloated features of the large software sequencers, and includes a small subset of features that I have found usable in performing.

Written by Rob C. Buse. I wrote this program to fill a hole. I figure it would be a waste if I was the only one using it. So, I released it under the GPL.

This project deserves to stay alive! (And it is alive! A new version, 0.9.3, has come out from the LaunchPad group! It corrects a problem with MIDI Clock drift). Taking advantage of Rob's generosity, we've created a reboot, a refactoring, an improvement (we hope) of *Seq24*. It preserves (we hope) the lean nature of *Seq24*, while adding a few features we've found useful, to make it the "vi of sequencers".

Always remember that, without *Seq24* and its authors, *Sequencer64* would never have come into being.

18 Summary

In summary, we can say that you will find *Sequencer64* intriguing.

Contact: If you have ideas about *Sequencer64* or a bug report, please email us (at <mailto:ahlstromcj@gmail.com>). If it's a bug report, please add [BUG] to the Subject, or use the GitHub bug-reporting interface.

19 References

The *Sequencer64* reference list.

References

- [1] ALSA team. *Advanced Linux Sound Architecture (ALSA) project homepage*. <http://www.alsa-project.org/>. ALSA tools through version 1.0.29. 2015.
- [2] amSynth team, Nick Dowell. *amSynth and Demos with Calf Effects*. <http://amsynth.com/amsynth.html>. Includes links to demos and the source code. 2015.
- [3] Bristol team, Nick Copeland. *Bristol: A Vintage Synthesizer Emulator*. <http://www.linuxsynths.com/BristolPatchesDemos/bristol.html>. 2014.
- [4] Coolsoft. *Coolsoft MIDIMapper (Windows)*. <https://coolsoft.altervista.org/en/midimapper>. 2018.
- [5] Coolsoft. *Coolsoft VirtualMIDISynth (Windows)*. <https://coolsoft.altervista.org/en/virtualmidisynth>. 2018.
- [6] FluidSynth team. *FluidSynth: A SoundFont Synthesizer*. <http://www.fluidsynth.org/>. 2014.
- [7] Jay Capela Music. *"Combine": A Seq24 Demonstration*. <https://www.youtube.com/watch?v=fUiXbVT0bJQ>. 2010.
- [8] JACK team. *JACK Audio Connection Kit*. <http://jackaudio.org/>. 2015.
- [9] Oli Kester. *Kepler34: Seq24 for the 2010s*. <https://github.com/oli-kester/kepler34>. 2010-2016.
- [10] Lassi Ylikojola. *Many demo videos of Sequencer64* <https://www.youtube.com/watch?v=YStYVjFv1TM>, <https://www.youtube.com/watch?v=GB1EP8Ffqss>, <https://www.youtube.com/watch?v=4gG8SvJxJkA&t=28s>, <https://www.youtube.com/watch?v=n4Z4WPK6FpA>. 2010-2017.
- [11] LinuxSynths team, briandc@linuxsynths.com. *A Sonic Palette on the Linux Platform*. <http://www.linuxsynths.com/>. 2015.
- [12] Dave Phillips. *At the Sounding Edge: Introducing seq24*. <http://www.linuxjournal.com/article/8304>. Linux Journal, May 12, 2005.
- [13] Chris Ahlstrom. *Extension of midicomp/midi2text to convert between MIDI and ASCII text format*. <https://github.com/ahlstromcj/midicvt>. 2015-2016.
- [14] linuxaudio.org. *seq24: toggle sequences with a MIDI controller*. <http://wiki.linuxaudio.org/wiki/seq24togglemiditutorial>. 2013.
- [15] midi.org. *Summary of MIDI Messages*. <https://www.midi.org/specifications/item/table-1-summary-of-midi-message#2>. Year unknown.
- [16] Roy Vegard. *Configurator software for the Korg nanoSERIES of MIDI controllers*. <https://github.com/royvegard/Nano-Basket>. 2015.
- [17] PortMedia team. *Platform Independent Library for MIDI I/O*. <http://portmedia.sourceforge.net/portmidi/>. 2010.
- [18] Gary P. Scavone. *The RtMIDI Tutorial*. <https://www.music.mcgill.ca/~gary/rtmidi/>. 2016.
- [19] Seq24 Team. *The home site for the Sequencer64 looping sequencer*. <http://www.filter24.org/seq24/download.html>. 2010.

- [20] pneumanlsd. *Linux audio demo: Live sequencing with seq24*. <https://www.youtube.com/watch?v=f8zLV0v1SpY>. 2010.
- [21] synthWF. *Misty Corridor - Seq24 (with QSynth)*. <https://www.youtube.com/watch?v=RH99zHvffGQ>. 2012.
- [22] pneumanlsd. *Linux music tutorial: seq24, part 1*. <https://www.youtube.com/watch?v=J2WDHS1wYeM>. 2010.
- [23] pneumanlsd. *Linux music tutorial: seq24, part 2*. <https://www.youtube.com/watch?v=i3Vpi3oxdqk>. 2010.
- [24] Seq24 Team. *The home site for the Sequencer64 looping sequencer*. <https://launchpad.net/seq24>. 2016.
- [25] Excds. *A simple mapping for toggling the LEDs on the Novation launchpad together with seq24*. <https://github.com/Excds/seq24-launchpad-mapper>. 2013.
- [26] Stan Preston (stazed). *The home site for the Seq32 looping sequencer*. <https://github.com/Stazed/seq32>. 2016.
- [27] sbrauer. *The home site for the original Seq42 looping sequencer*. <https://github.com/sbrauer/seq42>. 2016.
- [28] Stan Preston (stazed). *A fork of the Seq42 looping sequencer*. <https://github.com/Stazed/seq42>. 2016.
- [29] Chris Ahlstrom. *A reboot of the Seq24 project as "Sequencer64"*. <https://github.com/ahlstromcj/sequencer64/>. 2015-2017.
- [30] Chris Ahlstrom. *The Sequencer64 User Manual*. <https://github.com/ahlstromcj/sequencer64-doc/>. 2015-2017.
- [31] Chris Ahlstrom. *Sequencer64 Debian Packages*. <https://github.com/ahlstromcj/sequencer64-packages/>. 2017.
- [32] Kevin at subatomicglue.com. *Subatomic Mods for Seq24 Win32*. <http://www.subatomicglue.com/seq24/>. 2010.
- [33] Timidity++ Team. *Download site for Timidity++ source code*. <http://sourceforge.net/projects/timidity/>. 2015.
- [34] VMPK Team. *Virtual MIDI Piano Keyboard*. <http://vmpk.sourceforge.net/>. 2015.
- [35] The Wootangent man. *Sequencer64 Tutorial Video, Part 1*. <http://wootangent.net/2010/10/linux-music-tutorial-seq24-part-1/>. 2010.
- [36] The Wootangent man. *Sequencer64 Tutorial Video, Part 2*. <http://wootangent.net/2010/10/linux-music-tutorial-seq24-part-2/>. 2010.
- [37] Yoshimi team abrolag@users.sourceforge.net. *The download site for the Yoshimi software synthesizer*. <http://yoshimi.sourceforge.net/>. 2015.
- [38] Yoshimi team. *The alternate location for the Yoshimi source-code*. <https://github.com/abrolag/yoshimi/>. 2015.

- [39] Chris Ahlstrom. *A Yoshimi User Manual*. <https://github.com/ahlstromcj/yoshimi-doc/>. 2015-2017.
- [40] Chris Ahlstrom. *A Yoshimi Cookbook*. <https://github.com/ahlstromcj/yoshimi-cookbook/>. 2015.
- [41] Mark McCurry, Paul Nasca (ZynAddSubFX team). *The download site for the ZynAddSubFX software synthesizer*. <http://zynaddsubfx.sourceforge.net/>. 2015.

Index

- alsa, 147
- auto-alsa-ports, 125, 147
- bus [buss], 146
- config basename, 148
- file [filename], 146
- help, 146
- hide-alsa-ports, 147
- home [directory], 146
- ignore [number], 147
- interaction-method [number], 147
- inverse, 147
- jack-master, 123, 147
- jack-master-cond, 123, 147
- jack-midi, 124
- jack-session-uuid [uuid], 148
- jack-start-mode, 123
- jack-start-mode [x], 147
- jack-transport, 123, 147
- lash, 146
- legacy, 146
- manual-alsa-ports, 146
- no-lash, 146
- option opvalue, 148
- pass-sysex, 147
- ppqn [ppqn], 146
- priority, 147
- rc filename, 148
- reveal-alsa-ports, 147
- show-keys, 147
- show-midi, 147
- stats, 147
- user-save, 148
- usr filename, 148
- version, 146
- A, 147
- C, 147
- F, 148
- H, 146
- J, 147
- K, 147
- L, 146
- M, 147
- R, 147
- S, 147
- U, 148
- a, 147
- b, 146
- c, 148
- f, 148
- h, 146
- i, 147
- j, 147
- k, 147
- l, 146
- m, 146
- n, 146
- o, 148
- p, 147
- q, 146
- r, 147
- s, 147
- u, 148
- v, 146
- x, 147
- [allow-click-edit], 126
- [allow-mod4-mode], 126
- [allow-snap-split], 126
- [auto-option-save], 127
- [interaction-method], 126
- [jack-transport], 123
- [keyboard control], 121
- [keyboard-group], 122
- [lash-session], 126
- [last-used-dir], 127
- [manual-alsa-ports], 125
- [midi-clock-mod-ticks], 124
- [midi-clock], 119
- [midi-control], 109, 111
 - automation group, 116
 - bpm down, 116
 - bpm up, 116
 - mod glearn, 116
 - mod gmute, 116
 - mod queue, 116
 - mod replace, 116
 - mod snapshot, 116
 - mute-in group, 116
 - screen-set down, 116
 - screen-set play, 116
 - screen-set up, 116

- [midi-input], [124](#)
- [midi-meta-events], [121](#)
- [recent-files], [127](#)
- [reveal-alsa-ports], [125](#)
- [sequencer64.rc], [109](#)
- [sequencer64.usr], [130](#)
- [user-instrument-definitions], [134](#)
- [user-instrument-n], [135](#)
- [user-interface-settings], [136](#)
- [user-midi-bus-definitions], [131](#)
- [user-midi-bus-n], [132](#)
- [user-midi-settings], [140](#)
- [user-options], [142](#)
- disable-chords, [164](#)
- disable-highlight, [164](#)
- disable-jack-session, [164](#)
- disable-jack, [164](#)
- disable-lash, [164](#)
- disable-multiwid, [164](#)
- disable-pause, [164](#)
- disable-transpose, [164](#)
- enable-alsamidi, [164](#)
- enable-cli, [163](#)
- enable-portmidi, [164](#)
- enable-rtmidi, [163](#)
- SEQ64_EDIT_SEQUENCE_HIGHLIGHT, [165](#)
- SEQ64_FOLLOW_PROGRESS_BAR, [165](#)
- SEQ64_SEQNUMBER_ON_GRID, [166](#)
- SEQ64_SOLID_PIANOROLL_GRID, [167](#)
- SEQ64_USE_BRACKET_GRID, [166](#)
- SEQ64_USE_DEBUG_OUTPUT, [169](#)
- SEQ64_USE_EVENT_MAP, [165](#)
- SEQ64_USE_GREY_GRID, [165](#)
- SEQ64_USE_MIDI_VECTOR, [165](#)
- SEQ64_USE_NEW_FONT, [165](#)
- SEQ64_USE_VI_SEQROLL_MODE, [169](#)
- SEQ64_USE_WHITE_GRID, [166](#)
- Add Notes, [76](#)
- ALSA/JACK Modes, [42](#)
- Apply song transpose, [37](#)
- armed, [158](#)
- auto-connect, [185](#)
- auto-note, [77](#)
- auto-shift, [31](#), [43](#), [44](#), [123](#)
- automation group, [116](#)
- Background Sequence, [72](#)
- bank, [160](#)
- bar indicator, [159](#)
- Beat, [74](#)
- Beat Unit, [88](#)
- Beat Unit (Beat Width), [65](#)
- beat width, [65](#)
- Beats Per Bar, [65](#), [88](#)
- BPM, [60](#)
- bpm down, [116](#)
- bpm step increment, [110](#)
- bpm up, [116](#)
- bugs
 - file option doesn’t exist, [146](#)
 - documented, [12](#)
 - event delete key, [98](#)
 - event delete segfault, [99](#)
 - event editing can fail, [80](#)
 - event insert key, [98](#)
 - event name change, [98](#)
- build
 - debug output, [169](#)
 - disable chords support, [164](#)
 - disable highlight, [164](#)
 - disable jack, [164](#)
 - disable jack session, [164](#)
 - disable lash, [164](#)
 - disable multi-wid support, [164](#)
 - disable pause support, [164](#)
 - disable transpose support, [164](#)
 - enable alsamidi, [164](#)
 - enable cli, [163](#)
 - enable portmidi, [164](#)
 - enable rtmidi, [163](#)
 - event map, [165](#)
 - follow progress bar, [165](#)
 - grey/normal grid, [165](#)
 - grid numbers, [166](#)
 - midi vector, [165](#)
 - new font, [165](#)
 - normal grid, [166](#)
 - seq highlight, [165](#)
 - solid piano-roll, [167](#)
 - vi seqroll, [169](#)
 - white grid, [166](#)
- BUILD_ALSAMIDI, [164](#)
- BUILD_PORTMIDI, [164](#)
- BUILD_RTCLI, [163](#)
- BUILD_RTMIDI, [163](#)

- bus, [158](#)
- buss, [158](#)
- Buss Name, [24](#)
- Change Note Length, [78](#)
- Channel Number, [96](#)
- Chord Generation, [73](#)
- Clear mute groups, [38](#)
- Clear This Track's Song Data, [53](#)
- Client Number, [24](#)
- client number, [24](#)
- Clock Start Modulo, [24](#)
- Close, [99](#)
- Collapse, [89](#)
- compress events, [78](#)
- Connect, [36](#)
- Control keys, [29](#)
- Copy, [53](#)
- Copy/Paste, [78](#)
- Cut, [53](#)
- daemonize, [148](#)
- data area, [73](#)
- Data Byte 1, [98](#)
- Data Byte 2, [98](#)
- Data Bytes, [96](#)
- data pane, [75](#)
- data panel, [75](#)
- Data To MIDI Buss, [84](#)
- Delete Current Event, [98](#)
- Deselect Notes, [77](#)
- Disable, [31](#)
- Disable or Enable Transpose, [54](#)
- Disconnect, [37](#)
- draw mode, [34](#), [75](#), [76](#)
- edit
 - clear mute groups, [38](#)
 - load mute groups, [38](#)
 - mute all tracks, [38](#)
 - song editor, [37](#)
 - song transpose, [37](#)
 - toggle all tracks, [38](#)
 - unmute all tracks, [38](#)
- Edit..., [52](#)
- Enable, [31](#)
- Enter Draw Mode, [76](#)
- event
 - compression, [78](#)
 - stretch, [78](#)
- event area, [73](#)
- Event Category, [98](#)
- event data, [80](#)
- event data editor
 - draw, [80](#)
 - left click, [80](#)
 - middle click, [80](#)
 - mouse wheel, [80](#)
 - right click, [80](#)
- event edit, [28](#)
- Event Edit..., [52](#)
- event editor
 - channel number, [96](#)
 - close, [99](#)
 - data byte 1, [98](#)
 - data byte 2, [98](#)
 - data bytes, [96](#)
 - delete event, [98](#)
 - event category, [98](#)
 - event name, [96](#), [98](#)
 - event timestamp, [98](#)
 - index number, [96](#)
 - insert event, [99](#)
 - modify event, [99](#)
 - save to sequence, [99](#)
 - time stamp, [96](#)
- Event Name, [96](#), [98](#)
- Event Selection, [82](#)
- Event Selector, [81](#)
- event strip, [80](#), [159](#)
- Event Timestamp, [98](#)
- Event Values, [75](#)
- Events, [75](#)
- events
 - insert, [80](#)
- events pane, [75](#)
- Existing Event Selector, [82](#)
- Expand, [89](#)
- expand, [84](#)
- Expand and copy, [89](#)
- export, [158](#)
- exportable, [19](#)
- Ext Keys, [31](#)
- fast forward, [33](#)
- Follow Progress, [66](#)
- follow transport, [33](#)

- Fruity Mode, [76](#)
- global-sequence, [70](#)
- grave, [31](#)
- Grid Snap, [69](#), [89](#)
- group, [158](#)
 - arm, [45](#)
 - learn, [31](#), [45](#)
 - learning, [116](#)
 - muting, [116](#)
 - off, [31](#)
 - on, [31](#)
 - unmute, [45](#)
- group learn, [122](#)
- group toggle, [122](#)
- group-learn, [30](#)
 - auto-shift, [31](#), [43](#), [44](#), [123](#)
 - shift-lock, [31](#), [43](#), [44](#), [123](#)
- grow button, [93](#)
- igrave, [31](#)
- import
 - select screen offset, [18](#)
- Index Number, [23](#), [96](#)
- index number, [23](#)
- input buses, [27](#)
- input by channel, [27](#)
- input options, [27](#)
- Insert New Event, [99](#)
- interaction method, [34](#)
- inverse colors, [147](#)
- JACK
 - live mode, [36](#)
 - master conditional, [36](#)
 - native midi, [36](#)
 - song mode, [36](#)
 - transport, [36](#)
 - transport master, [36](#)
- jack
 - auto-connect, [185](#)
 - manual-alsa-ports, [125](#)
 - reveal-alsa-ports, [125](#)
- jack page
 - ctrl-p, [37](#)
- JACK Start mode, [36](#)
- jack sync
 - connect, [36](#)
 - disconnect, [37](#)
 - start mode, [36](#)
 - transport/midi, [36](#)
- JACK toggle, [32](#)
- keep queue, [30](#), [160](#)
- Keep-Queue Status, [61](#)
- Key of Sequence, [70](#)
- keyboard
 - control keys, [29](#)
 - disable, [31](#)
 - enable, [31](#)
 - extended keys, [31](#)
 - group off, [31](#)
 - group on, [31](#)
 - igrave, [31](#)
 - learn, [31](#)
 - mute-group slots, [30](#)
 - sequence numbers, [29](#)
 - sequence toggle keys, [30](#)
 - show labels, [29](#)
- keys
 - , [48](#), [52](#)
 - ., [64](#)
 - =, [48](#), [52](#)
 - [, [45](#), [56](#)
 -], [45](#), [56](#)
 - 0, [69](#), [85](#), [92](#)
 - alt, [56](#)
 - apostrophe, [31](#), [60](#)
 - avoid ctrl/alt, [56](#)
 - backspace, [78](#)
 - copy, [91](#)
 - ctrl-a, [67](#), [77](#)
 - ctrl-c, [78](#), [91](#)
 - ctrl-e, [38](#)
 - ctrl-p, [37](#)
 - ctrl-v, [78](#), [92](#)
 - ctrl-x, [78](#)
 - ctrl-z, [66](#)
 - decrement set, [56](#)
 - del, [78](#)
 - delete, [91](#), [93](#)
 - down-arrow, [68](#)
 - end, [74](#), [89](#)
 - enter, [78](#)
 - esc (stop), [60](#), [88](#)
 - event edit, [48](#), [52](#)
 - gotchas, [27](#)

- Home, [45](#)
- home, [74](#), [89](#)
- hot, [55](#)
- increment set, [56](#)
- keep queue, [30](#), [57](#)
- l, [93](#)
- Mod4, [34](#)
- mod4, [76](#), [92](#)
- no ctrl/alt please, [123](#)
- one-shot queue, [57](#)
- p, [34](#), [64](#), [75](#), [76](#), [92](#)
- page-down, [74](#), [85](#), [89](#)
- page-up, [74](#), [85](#), [89](#)
- paste, [92](#)
- pattern edit, [48](#), [52](#)
- pattern toggles, [55](#)
- pause, [64](#)
- period (pause), [88](#)
- queue, [30](#), [56](#)
- r, [93](#)
- replace, [57](#)
- right ctrl, [56](#)
- screenset down, [45](#), [56](#)
- screenset play, [45](#)
- screenset up, [45](#), [56](#)
- semicolon, [60](#)
- shift, [27](#)
- shift page-down, [85](#)
- shift page-up, [85](#)
- shift-end, [74](#), [89](#)
- shift-home, [74](#), [89](#)
- shift-page-down, [74](#), [89](#)
- shift-page-up, [74](#), [89](#)
- shift-z, [69](#), [92](#)
- shortcut, [55](#)
- slot-shift, [30](#)
- snapshot, [30](#), [56](#)
- space (play), [60](#), [88](#)
- up-arrow, [68](#)
- x, [35](#), [64](#), [75](#), [76](#), [92](#), [93](#)
- Z, [85](#)
- z, [69](#), [85](#), [92](#)
- L anchor, [93](#)
- L button, [31](#), [43](#)
- L marker, [88](#), [93](#)
- lash
 - option, [37](#)
- LASH Options, [37](#)
- Learn, [31](#)
- legacy mode, [109](#), [130](#)
- LFO, [82](#)
- live mode, [36](#), [41](#), [51](#)
- log, [148](#)
- Log Tempo, [61](#)
- loop, [158](#)
- loop mode, [88](#)
- Mac OSX, [150](#)
- main window, [41](#)
- Measure, [74](#)
- measures ruler, [90](#), [159](#)
 - left-click, [93](#)
 - right-click, [93](#)
- menu mode, [32](#)
- merge, [84](#)
- Meta Events, [24](#)
- MIDI Bus, [54](#)
- midi clock, [159](#)
 - buss name, [24](#)
 - client number, [24](#)
 - clock start modulo, [24](#)
 - index number, [23](#)
 - meta events, [24](#)
 - off, [24](#)
 - on (mod), [24](#)
 - on (pos), [24](#)
 - port disabled, [24](#)
 - port name, [24](#)
 - port number, [24](#)
- MIDI Data Pass-Through, [84](#)
- MIDI Out Device (Buss), [65](#)
- MIDI Out Port (Channel), [65](#)
- mod glearn, [116](#)
- mod gmute, [116](#)
- mod queue, [116](#)
- mod replace, [116](#)
- mod snapshot, [116](#)
- mode
 - draw , [34](#)
 - live, [41](#)
 - paint , [34](#)
 - song, [41](#)
- Modify Current Event, [99](#)
- modify event-data, [67](#)
- modify pitch, [67](#)

- modify time, [67](#)
- mouse
 - ctrl-left-click, [67](#)
 - ctrl-left-click-drag, [67](#), [80](#)
 - fruity, [34](#)
 - left-click, [64](#), [67](#), [75](#)
 - left-click-drag, [64](#), [67](#), [68](#), [75](#), [80](#)
 - Mod4, [34](#)
 - right-click-drag, [75](#)
 - split mode, [34](#)
- mouse interaction, [34](#)
- Move Notes in Pitch, [77](#)
- Move Notes in Time, [77](#)
- multi-wid, [61](#), [139](#), [148](#)
- Musical Scale, [70](#)
- mute all, [38](#)
- Mute All Tracks, [53](#)
- Mute all tracks, [38](#)
- Mute Group Learn, [43](#)
- mute groups, [38](#)
- mute-group, [30](#), [158](#)
- Mute-group slots, [30](#)
- mute-in group, [116](#)
- muted, [159](#)
- N/A, [146](#), [147](#)
- Name, [61](#)
- New, [48](#)
- new
 - bus option, [54](#)
 - caps lock in learn mode, [44](#)
 - channel split, [170](#)
 - click-edit, [126](#)
 - current slot highlight, [49](#)
 - documented, [12](#)
 - down arrow, [77](#)
 - dual song editors, [86](#)
 - editing shortcut, [48](#)
 - empty pattern, [51](#), [87](#)
 - empty slot double-click, [48](#), [52](#)
 - event -, [52](#)
 - event edit, [28](#)
 - hide ALSA ports, [147](#)
 - home directory, [146](#)
 - LASH runtime disabling, [146](#)
 - LASH runtime enabling, [146](#)
 - left arrow, [77](#)
 - legacy mode, [146](#)
 - LFO control, [82](#)
 - marker mode, [93](#)
 - meta events, [17](#)
 - MIDI buss override, [146](#)
 - Mod4 edit-lock, [126](#)
 - mod4 mode, [92](#)
 - movement mode, [93](#)
 - musical scales, [70](#)
 - one-shot queue, [57](#)
 - paint mode, [76](#), [92](#)
 - pattern edit, [28](#), [52](#)
 - pattern event edit, [52](#)
 - pause, [28](#), [60](#)
 - ppqn from MIDI file, [146](#)
 - ppqn override, [146](#)
 - reveal ALSA ports, [147](#)
 - right arrow, [77](#)
 - save background sequence, [72](#)
 - save musical key, [70](#)
 - save musical scale, [71](#)
 - saved control tags, [172](#)
 - selected data coloring, [79](#)
 - seqspec format, [17](#)
 - sequence numbers, [29](#)
 - smf 0 support, [170](#)
 - snap-split, [126](#)
 - tempo events, [171](#)
 - time signature events, [171](#)
 - time/tempo saved, [171](#)
 - up arrow, [77](#)
 - zoom keys, [69](#), [92](#)
- night mode, [147](#)
- no-daemonize, [148](#)
- non-playback mode, [36](#)
- Note Length, [69](#)
- note step, [74](#)
- Notes, [75](#)
- notes
 - auto, [76](#)
 - duration, [76](#)
 - duration change, [78](#)
 - inserting, [76](#)
- obsolete:compile-time font, [165](#)
- Off, [24](#)
- On (Mod), [24](#)
- On (Pos), [24](#)
- paint mode, [34](#), [75](#), [76](#)

- pan
 - seqroll notes, 85
 - seqroll time, 85
- Panic, 59
- Paste, 50
- pattern, 159
 - ALSA/JACK mode, 42
 - ALSA/JACK modes, 42
 - beat, 51, 91
 - BPM, 60
 - bus-channel, 51
 - buss-channel, 91
 - channel, 91
 - clear song data, 53
 - color menu, 47
 - coloring, 47
 - contents, 50
 - copy, 53
 - cut, 53
 - edit, 52
 - end marker, 74
 - event edit, 52
 - keep-queue, 61
 - left click, 51, 59
 - left click-drag, 59
 - length, 50
 - log tempo, 61
 - main time—hyperpage, 42
 - middle click, 59
 - midi bus, 54
 - mute, 59
 - mute all tracks, 53
 - mute group learn, 43
 - mute toggle, 59
 - name, 50, 91
 - new, 48
 - panic, 59
 - paste, 50
 - Pause, 60
 - Play, 60
 - progress, 42
 - progress bar, 42
 - record tempo, 61
 - right click, 48, 51, 59
 - set name, 61
 - set number, 61
 - shift-left-click, 58, 91
 - slot, 46
 - song, 50, 53
 - song record, 60
 - song record snap, 60
 - song/live, 42
 - stop, 60
 - tap tempo, 60
 - time display, 43
 - title, 91
 - toggle all tracks, 54
 - toggle live tracks, 54
 - toggle menu, 42
 - toggle song editor, 61
 - toggle tracks, 42
 - transpose, 54
 - unmute, 59
 - unmute all tracks, 54
- pattern edit, 28
- pattern editor
 - add notes, 76
 - background sequence, 72
 - beat unit, 65
 - beats/bar, 65
 - change note length, 78
 - chord generation, 73
 - copy, 78
 - copy/paste, 78
 - ctrl left click drag, 77, 78
 - cut, 78
 - data to midi buss, 84
 - delete, 78
 - deselect notes, 77
 - draw mode, 76
 - drop, 78
 - event compression, 78
 - event selection, 82
 - event selector, 81
 - event stretch, 78
 - existing events, 82
 - fruity mode, 76
 - grid snap, 69
 - key, 70
 - left click, 77
 - left click drag, 77
 - length, 65
 - LFO, 82
 - middle click drag, 78
 - midi data pass-through, 84
 - midi out device, 65

- midi out port, 65
- mod4, 76
- move notes in pitch, 77
- move notes in time, 77
- name, 65
- note length, 69
- number, 65
- paste, 78
- progress bar, 65
- quantize, 66
- quantized record, 84
- record midi data, 84
- recording type, 84
- redo, 66
- right hold, 76
- right hold left click, 76
- right hold left drag, 76
- scale, 70
- select note, 77
- select notes, 77
- shift middle click drag, 78
- time scroll, 84
- tools, 66
- transpose toggle, 65
- undo, 66
- vol, 84
- zoom, 69
- pattern editors
 - beat width, 65
- pattern extension, 94
- Pattern Length, 65
- Pattern Name, 65
- Pattern Number, 65
- pattern subsection, 91
- patterns column
 - ctrl-left-click, 91
 - left-click, 91
 - right-click, 91
- patterns panel
 - inverse muting, 58
 - solo, 58
- pause, 28, 64, 87
- performance, 85, 159
- performance mode, 36
- piano roll
 - beat, 74
 - event values, 75
 - events, 75
 - measure, 74
 - notes, 75
 - virtual keyboard, 75
- Play, 88
- Play and Pause, 60
- Play Loop, 88
- playback mode, 36
- pointer position, 33
- port, 159
- Port Disabled, 24
- port name, 24
- Port Number, 24
- port number, 24
- ports
 - manual, 187
 - virtual, 187
- ppqn, 96
 - \$ shortcut, 96
- progress bar, 87
- pulses, 160
- qpseq64.exe, 149
- quantize, 67
- Quantize Selection, 66
- Quantized Record, 84
- queue, 30
 - cancel, 57
 - clear, 58
 - end, 58
 - keep, 30, 57, 160
 - one-shot, 57
 - replace, 57
 - solo, 57
 - temporary, 56
- R anchor, 93
- R marker, 88, 93
- rc
 - automation group, 110
 - bpm-down, 111
 - bpm-page-down, 112
 - bpm-page-up, 112
 - bpm-up, 111
 - extended automation, 111
 - midi-control, 111
 - midi-thru, 112
 - mod-glearn, 111
 - mod-gmute, 111

- mod-queue, [111](#)
- mod-replace, [111](#)
- mod-snapshot, [111](#)
- mute groups, [38](#)
- mute-in group, [110](#)
- mute-in-group, [111](#)
- pattern group, [110](#)
- pattern-group, [111](#)
- pause-start-stop, [112](#)
- performance-record, [112](#)
- reserved-for-expansion, [112](#)
- screen-set-down, [111](#)
- screen-set-play, [111](#)
- screen-set-up, [111](#)
- start/stop control, [116](#)
- rc file, [45](#), [55](#), [57](#)
- Record MIDI Data, [84](#)
- Record Tempo, [61](#)
- Recording Type, [84](#)
- recording type
 - expand, [84](#)
 - merge, [84](#)
 - replace, [84](#)
- Redo, [66](#), [89](#)
- redo, [87](#)
- Reload mute groups, [38](#)
- replace, [84](#)
- rewind, [33](#)
- Save to sequence, [99](#)
- scaling, [149](#)
- screen set, [45](#), [160](#)
- screen-set down, [116](#)
- screen-set play, [116](#)
- screen-set up, [116](#)
- scroll
 - ctrl scroll, [85](#)
 - horizontal pan, [85](#)
 - horizontal zoom, [85](#)
 - normal scroll, [85](#)
 - notes pan, [85](#)
 - shift scroll, [85](#)
 - timeline pan, [85](#)
 - timeline zoom, [85](#)
 - vertical pan, [85](#)
- Select Notes, [77](#)
- select screen offset, [18](#)
- selection
 - add multiple notes, [77](#)
 - all, [77](#)
 - deselect, [77](#)
 - multiple notes, [77](#)
 - single note, [77](#)
- selection action, [77](#)
- seq64, [183](#)
- SEQ64_HIGHLIGHT_EMPTY_SEQS, [164](#)
- SEQ64_JACK_SESSION, [164](#)
- SEQ64_JACK_SUPPORT, [164](#)
- SEQ64_LASH_SUPPORT, [164](#)
- SEQ64_MULTI_MAINWID, [164](#)
- SEQ64_PAUSE_SUPPORT, [164](#)
- SEQ64_STAZED_CHORD_GENERATOR, [164](#)
- SEQ64_STAZED_TRANSPOSE, [164](#)
- seq64portmidi, [183](#)
- sequence, [160](#)
- sequence extension, [94](#)
- Sequence toggle keys, [30](#)
- Sequencer64, [183](#)
- Sequencer64 for Windows, [149](#)
- sequencer64 options, [34](#)
- sequencer64.rc, [109](#)
- sequencer64.usr, [130](#)
- Set, [61](#)
- shift left click, [51](#), [87](#), [91](#)
- shift-left-click solo, [58](#), [91](#)
- shift-lock, [31](#), [43](#), [44](#), [123](#)
- Show key labels on sequence, [29](#)
- Show sequence numbers on sequence, [29](#)
- slot
 - empty slot right-click, [48](#)
- slot-shift, [30](#)
- snapshot, [30](#), [161](#)
- solo
 - true, [58](#)
- Song, [50](#), [53](#)
- song, [161](#)
- Song Editor, [37](#)
- song editor, [37](#)
 - beat unit, [88](#)
 - beats/bar, [88](#)
 - collapse, [89](#)
 - ctrl-e, [38](#)
 - deletion, [93](#)
 - draw, [92](#)
 - expand, [89](#)
 - expand and copy, [89](#)

- grid snap, 89
- grow, 93
- handle, 92
- insert, 92
- inverse muting, 91
- left-click, 93
- left-click-right-hold, 92
- middle click, 91
- middle-click, 93
- mod4, 92
- multiple insert, 93
- mute indicator, 91
- muting, 91
- pattern subsection, 93
- play, 88
- play loop, 88
- redo, 89
- right left hold drag, 93
- right-click-hold, 92
- right-left-hold-drag, 93
- section expansion, 92
- section length, 92
- section movement, 92
- selection, 93
- solo, 91
- split pattern, 92
- stop, 88
- undo, 89
- zoom, 69
- song mode, 32, 36, 41, 85
- Song Progress Bar, 42
- Song Record, 60
- Song Record Snap, 60
- song transpose, 37
- Song/Live, 42
- step, 74
- sticky options, 185
- Stop, 60, 88
- stretch events, 78
- tap bpm, 33
- Tap Tempo, 60
- tempo-track-number, 24, 121
- tighten, 67
- Time Display Selection, 43
- Time Scroll, 84
- Time Stamp, 96
- tips
 - documented, 12
- todo
 - documented, 12
 - fruity mode, 76
 - high precision events, 80
 - manual alsa gui option, 25
- todo:extend mouse support, 35
- Toggle All Track, 54
- toggle JACK, 32
- Toggle Live Tracks, 54
- Toggle Menu, 42
- toggle mute all, 38
- Toggle mute all tracks, 38
- toggle mutes, 33
- Toggle Song Editor, 61
- Toggle Tracks, 42
- Tools, 66
- Transport/MIDI, 36
- transpose, 87, 90
- Transpose Toggle, 65
- trigger, 161
- Undo, 66, 89
- unmute all, 38
- Unmute All Tracks, 54
- Unmute all tracks, 38
- untransposable color, 87
- usr
 - user-save, 128
 - u, 128
 - allow-two-perfedits, 138
 - block-columns, 139
 - block-independent, 140
 - block-rows, 139
 - bpm-page-increment, 141, 142
 - bpm-precision, 141
 - bpm-step-increment, 141, 142
 - control-height, 137
 - global-seq-feature, 137
 - grid-brackets, 136
 - grid-style, 136
 - inverse-colors, 139
 - mainwid-border, 137
 - mainwid-spacing, 137
 - mainwnd-cols, 137
 - mainwnd-rows, 137
 - max-sets, 137
 - midi-beat-width, 140

- mid-beats-per-measure, [140](#)
- mid-beats-per-minute, [140](#)
- mid-bpm-maximum, [142](#)
- mid-bpm-minimum, [141](#), [142](#)
- mid-buss-override, [141](#)
- mid-ppqn, [140](#)
- option-daemonize, [142](#)
- option-logfile, [142](#)
- perf-h-page-increment, [138](#)
- perf-v-page-increment, [138](#)
- progress-bar-colored, [138](#)
- progress-bar-thick, [139](#)
- step increment, [110](#)
- use-more-icons, [139](#)
- use-new-font, [138](#)
- user-instrument-definitions, [134](#)
- user-instrument-n, [135](#)
- user-interface-settings, [136](#)
- user-midi-bus-definitions, [131](#)
- user-midi-bus-n, [132](#)
- user-midi-settings, [118](#)
- velocity-override, [141](#), [142](#)
- window-redraw-rate, [139](#)
- zoom, [137](#)
- usr config, [26](#), [27](#)
- variset, [62](#), [137](#), [148](#)
 - slash key, [55](#)
- vi, [190](#)
- Virtual Keyboard, [75](#)
- virtual keyboard
 - right-click, [75](#)
- VLV, [175](#)
- Vol, [84](#)
- warning
 - down arrow, [77](#)
 - event editor, [94](#)
 - note loss, [77](#)
 - unterminated notes, [80](#)
 - up arrow, [77](#)
 - wrap-around notes, [78](#)
- warnings
 - usr config, [26](#), [27](#)
- window
 - close, [85](#)
- Windows, [149](#)
- Zoom, [69](#)
- zoom
 - seqroll time, [85](#)